

SUPPLY TUBING

UV-resistant polyethylene makes this 0.700" x 0.600" solution a useful addition to drip systems.

KEY BENEFITS

- Thick wall and UV resistance provide durability and longevity
- Kink resistance for added flexibility and quicker installation

PRODUCT SPECIFICATIONS

- 0.700" x 0.600" (outside x inside diameter)

OPERATING SPECIFICATIONS

- Operating pressure range: up to 80 PSI
- Warranty period: 2 years



1/2" PE Tubing

1/2" PE TUBING – SPECIFICATION BUILDER: ORDER 1 + 2 + 3

1	Model	2	Tubing Diameter	3	Length
	TWPE = Thick-walled polyethylene tubing		700 = 0.700" outside diameter		100 = 100' 250 = 250' 500 = 500' 1K = 1,000'

Example:
TWPE-700-250 = 1/2" polyethylene tubing in a 250' roll

ECO-INDICATOR

Confirm system operation and adequate pressure with this handy visual tool.


KEY BENEFITS

- Visible yellow stem indicates when system is in operation
- Stem pops up when pressure exceeds 12 PSI and assists in confirming low pressures if not raised

OPERATING SPECIFICATIONS

- Operating pressure: up to 80 PSI
- Indication of system operation: above 12 PSI
- Warranty period: 2 years

Eco-Indicator Installed

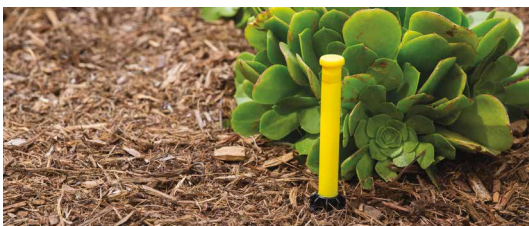

ECO-ID

Pair with Eco-Mat® and Eco-Wrap® subsurface systems.