

Golf Irrigation Product Catalog

GOLF IRRIGATION | *Built on Innovation*[®]

VOLUME 39

Hunter[®]



Table of CONTENTS

● INTRODUCTION

- 3 Our Story
- 3 Product Highlights

● PILOT NETWORK

- 6 Pilot® Command Center Software
- 8 Pilot Field Controller Systems
- 10 Pilot Integrated Hub Systems
- 12 Weather Station
- 13 Maintenance Radio
- 13 ICD-HP Programmer

● GOLF ROTORS

- 22 TTS-800 Series Golf Rotors
- 30 G-800 Series Golf Rotors
- 38 B Series Golf Rotors
- 46 G-900 Series Golf Rotors

● SWING JOINTS AND ACCESSORIES

- 50 HSJ Swing Joints
- 50 Acme Adapter Fittings
- 51 Rotor Accessories
- 51 SpotShot Hose-End Nozzles
- 52 Quick Couplers
- 53 SnapLok™ Combo Kits
- 54 Tools

● LANDSCAPE SOLUTIONS

- 55 Landscape Solutions

● ROTORS

- 57 PGP® Ultra Rotors
- 58 I-20 Rotors
- 60 I-25 Rotors

● MP ROTATOR® NOZZLES

- 63 MP Rotator Nozzles
- 66 MP Rotator 800 Nozzles
- 68 Pro-Spray® PRS40 Sprinkler Body

● VALVES

- 71 ICV Valves
- 73 IBV Valves

● LANDSCAPE AND ARCHITECTURAL LIGHTING

- 74 FX Luminaire

● HUNTER SUPPORT NETWORK

- 77 Hunter Rapid Repair Kits

● TECHNICAL INFORMATION

- 79 Hunter University
- 80 Precipitation Rates
- 81 Conversion Factors
- 82 Symbols and Constants
- 83 Pilot Field Controller Electrical Specifications
- 83 Pilot Integrated Hub Electrical Specifications
- 84 Current Requirement Charts
- 85 Wire Use Charts
- 86 Wire Sizing
- 87 Additional Data
- 88 Friction Loss Charts

● STATEMENT OF WARRANTY

- 94 Statement of Warranty

Our **STORY**

Founded in 1981, Hunter Industries is a family-owned, global manufacturer of best-in-class solutions for residential, commercial, municipal, agricultural, and golf course irrigation systems, as well as the outdoor lighting industry. Headed by CEO Greg Hunter, our Global Operations Team provides leadership for the entire company. The core mission of Hunter Industries will always remain the same: to deliver valued products and services backed by unwavering customer support, grow the company conscientiously, and remain true to the culture that makes our employees proud to work at Hunter. [Learn more at hunterindustries.com](http://hunterindustries.com).



Product **HIGHLIGHTS**

WHEN IT COMES TO ENSURING GREEN AND PLAYABLE GOLF COURSES, IRRIGATION SIMPLY MUST BECOME MORE EFFICIENT.

Achieving this goal requires more than high-performing golf irrigation products that push the boundaries of innovation. You need a trusted partner, from conception to installation and beyond.

That's why we have redoubled our efforts to deliver best-in-class solutions that meet and exceed golf course irrigation requirements. With premier products like our Pilot Command Center Software and TTS-800 Series Golf Rotors — along with our full golf irrigation product lineup — we have the field-proven tools you need to ensure every course is always ready for play. And it's all backed by comprehensive training and technical support to ensure every product always performs at the highest level.

Course Control: Pilot Command Center Software

With newly enhanced Pilot Command Center Software, you can create hydraulically safe and efficient daily golf course watering plans faster than ever before. Working from one easy-to-navigate screen, you can operate thousands of individually controlled sprinklers and make all watering changes in seconds. [See page 6 for more details.](#)



Power Play: TTS-800 Series Golf Rotors

Get maximum uniformity and longevity in the field with powerful TTS-800 Series Golf Rotors. They feature high-torque gear drives that are the strongest in the industry and extra-large flange compartments that let you access internal parts quickly and easily. Plus, routine maintenance is a breeze with no-dig Total-Top-Serviceability that provides direct access to all elements from the top. [See page 18 for more details.](#)



PILOT[®] NETWORK



Pilot CCS

Powerful software designed with advanced tools to make irrigation simple and seamless



Pilot IHS

Reliable controllers with modern engineering and next-generation technology



TTS Rotors

Pilot Two-Way Modules with no-dig Total-Top-Serviceability



MAKE LIFE EASIER

WITH A NEW APPROACH TO GOLF IRRIGATION

Pilot CCS

Command Center Software

With next-generation Pilot Command Center Software, you can create hydraulically safe and efficient daily course watering plans faster than ever before. Pilot helps manage thousands of individually controlled sprinklers in seconds. It's the ideal management tool for an Integrated Hub System.

Pilot IHS

Integrated Hub System

Integrated Hub Systems help you save time and money from day one. Compared to a Field Controller System, an Integrated Hub System uses less copper wire and requires fewer splices, valve boxes, and concrete pads. This means lower costs, faster installation, and easier system diagnosis and repair, if needed. You can also easily expand the system if desired.

TTS Rotors

With Pilot Two-Way Modules

Two-Way Module (TWM) technology built into every TTS rotor permits highly efficient control of complex irrigation systems. The rotors are connected to the system via low-voltage, direct-burial communication cable.

ICD-HP PROGRAMMER

Communicate Directly with TWMs

Program and troubleshoot Pilot Two-Way Modules with no digging or wires required. The handy device communicates directly through the plastic without barcodes, saving you time in the field.

PILOT[®] COMMAND CENTER SOFTWARE


Enjoy simple yet powerful irrigation management and control with revolutionary Pilot CCS.

Pilot Command Center Software (CCS) is easy to use and has all the features you need to reliably water your course. Run times can be adjusted manually or determined automatically using evapotranspiration (ET). You create watering plans directly in the Command Center — a powerful irrigation planning tool that shows you every sprinkler on the course, organized according to your management style.

PILOT SPECIFICATIONS

- Operating system: 64-bit Windows[®]
- Maximum controllers or hubs: about 1,000
- Maximum Two-Way Module stations: about 1 million
- Sprinkler run time options: minutes, inches, or ET
- Hydraulic management: fully customizable down to individual stations
- Mapping: interactive and based on scalable vector graphics (SVG)

Pilot Command Center Software

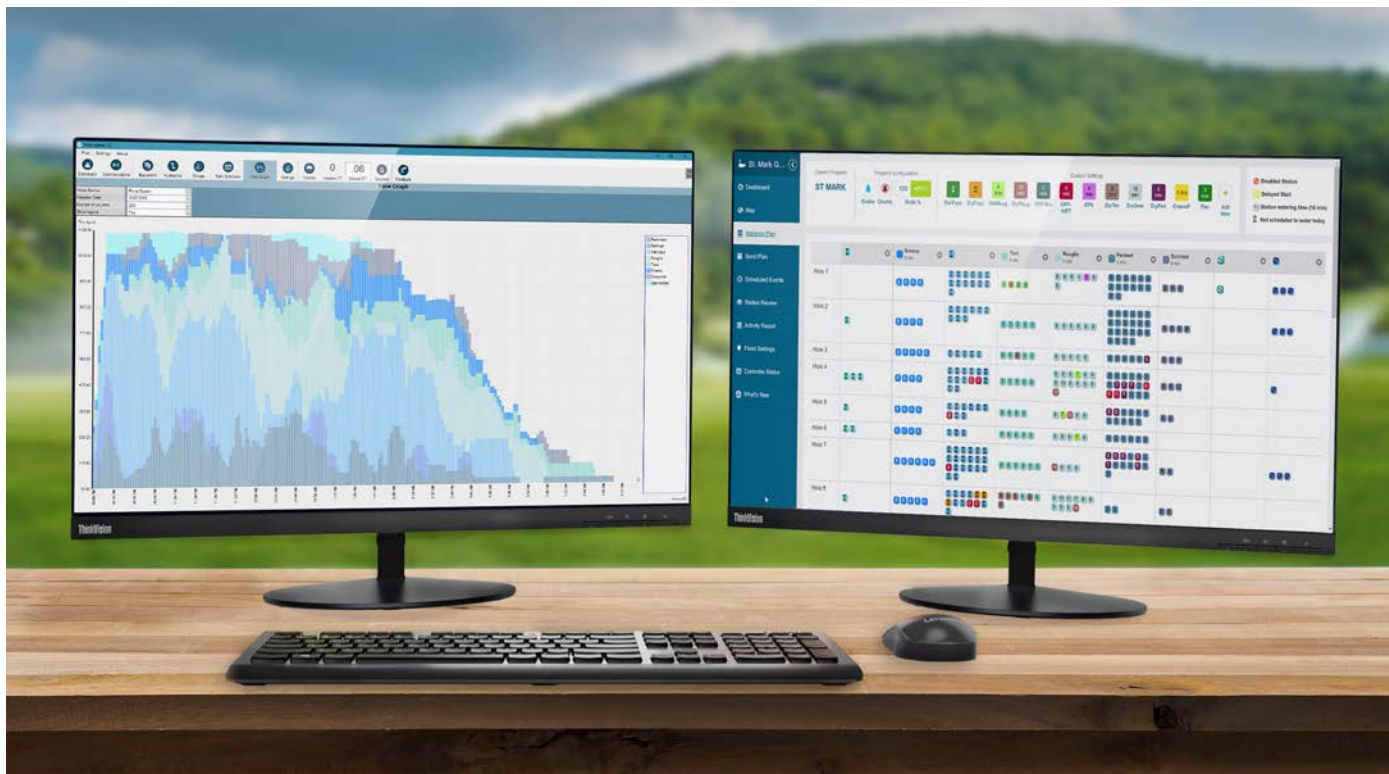

Windows is a trademark of Microsoft Corporation in the United States and/or other countries.
Lenovo[®] and ThinkVision[®] are trademarks of Lenovo in the United States, other countries, or both.

SET SCHEDULES WITH THE COMMAND CENTER


Planning daily watering for your course has never been simpler. The Command Center shows every sprinkler on the course, logically arranged according to your personal management requirements. You can easily make daily adjustments with just a few clicks of the mouse.



Command Center

SPEND LESS TIME RUNNING YOUR PUMP

Pilot CCS uses your electrical and hydraulic data to efficiently balance sprinkler demand while maintaining flow at safe velocities. To protect your pump station and maintain optimal sprinkler uniformity, you can gradually step up irrigation in safe increments.

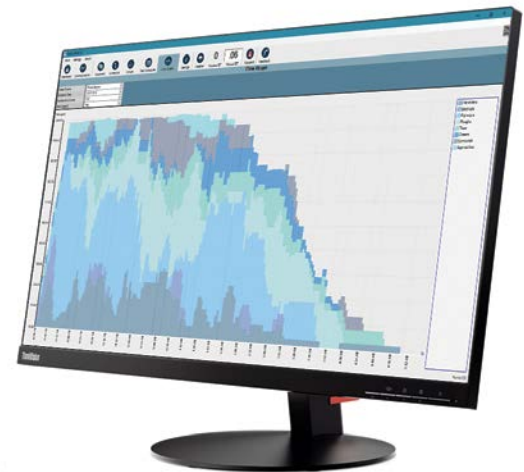

Flow Optimization

WORK FASTER WITH A MAPPED COURSE

Although having a map is not required, adding one allows you to run water by simply clicking the station symbols on the map. With this helpful feature, you can also monitor stations as they are running.



Maps

PILOT® FIELD CONTROLLER SYSTEMS

The sleek, clean design of Pilot Field Controllers makes them easy to install, use, and maintain.

KEY BENEFITS

- Five languages
- Up to 80 station outputs in 10-station increments
- Up to three Hunter golf Valve-in-Head Technology rotors per station output
- Up to 20 simultaneous Hunter golf Valve-in-Head Technology rotors active per controller
- 32 automatic schedules with eight start times per schedule
- Exclusive Safe-Toggle™ Technology for mechanical on-off-auto station switches
- 1 to 31 day skip-day scheduling
- One-touch rain shutdown up to 30 days or indefinitely
- One-touch Safe-Pause™ Technology with 30-minute safety timer
- 1% to 300% run time seasonal adjustment
- Seasonal start time adjustment is used to quickly change all start times plus or minus 30 minutes
- PilotFCP Utility enables remote scheduling from a computer or tablet for basic course irrigation management



Pilot-FC Plastic Pedestal

Height: 39"
Width: 24"
Depth: 17"
Weight: 70 lbs

POWER SUPPLY INPUT

Two voltage settings:

- 120 VAC nominal voltage at 60/50 Hz (100 to 132 VAC)
- 230 VAC nominal voltage at 50/60 Hz (200 to 260 VAC)

Current requirement:

- 1 A under load at 110 VAC
- 0.7 A under load at 230 VAC

For additional information, see electrical data on **page 81**.



Pilot-FI Field Interface

One is required with any Pilot Network system. It is used to link the central computer to the field equipment. For indoor locations only.

Height: 12"
Width: 11½"
Depth: 3¼"
Weight: 4½ lbs

OUTPUT VOLTAGE

- Station: 1 A at 24 VAC
- Hot post: 0.4 A at 24 VAC
- Capacity: Three standard 24 VAC Hunter golf rotors per output; 20 maximum simultaneously running stations

RADIO SYSTEMS

- UHF radio: 450 to 490 MHz; other UHF frequencies available for selected markets

WIRED SYSTEMS

- GCBL: Two twisted pairs of shielded wire, 18 AWG
- GCBLA: Two twisted pairs of shielded and armored wire, 18 AWG

PILOT-FI - SPECIFICATION BUILDER: ORDER 1 + 2 + 3


1 Model	2 Standard Features	3 Communication Options
Pilot-FI	Plastic pedestal (gray)	<p>HWR Hardwire communications</p> <p>UHF UHF radio communications (license required)</p>

Examples:

Pilot-FI-HWR = Field Interface with hardwire communications

Pilot-FI-UHF = Field Interface with UHF radio communications

THE PILOT FIELD CONTROLLER IS ENGINEERED EXCLUSIVELY FOR GOLF COURSE IRRIGATION MANAGEMENT

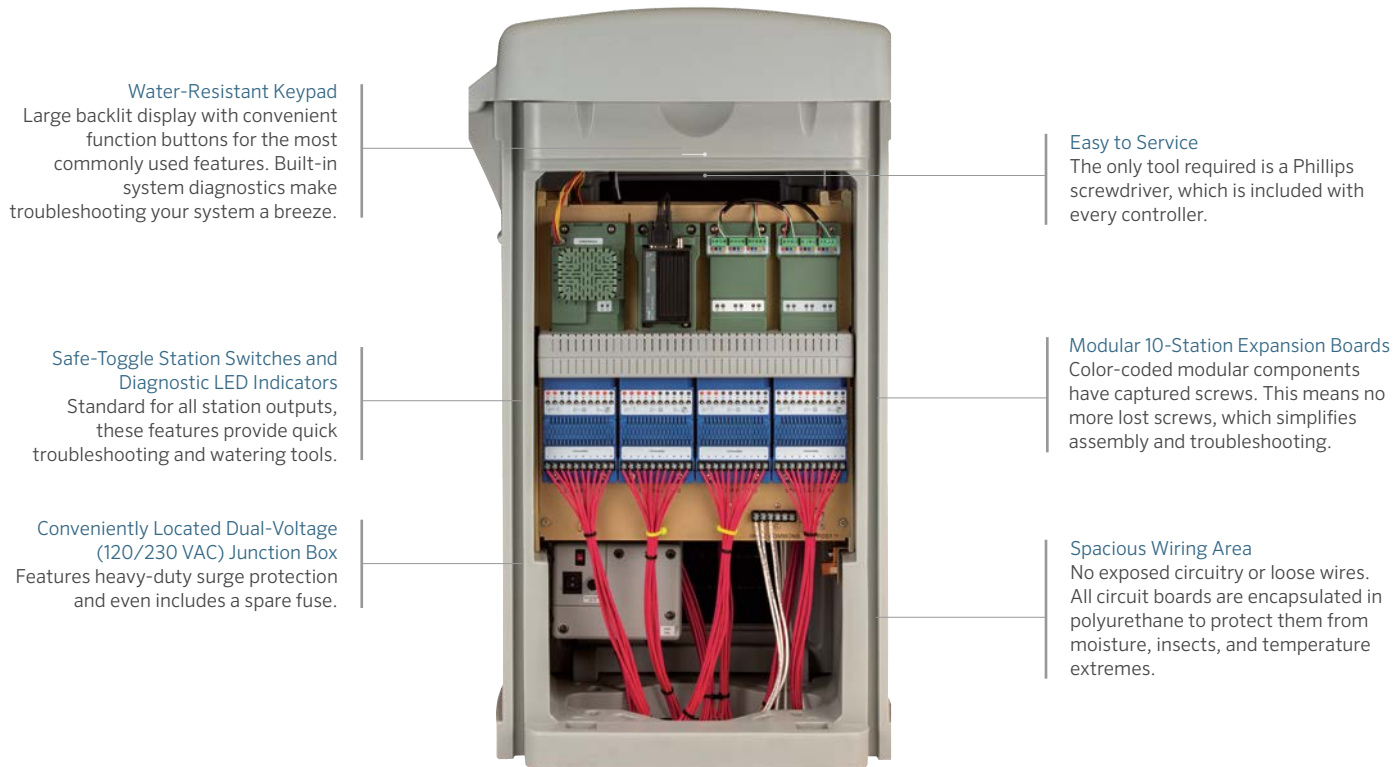

Water-Resistant Keypad
Large backlit display with convenient function buttons for the most commonly used features. Built-in system diagnostics make troubleshooting your system a breeze.

Easy to Service
The only tool required is a Phillips screwdriver, which is included with every controller.

Safe-Toggle Station Switches and Diagnostic LED Indicators
Standard for all station outputs, these features provide quick troubleshooting and watering tools.

Modular 10-Station Expansion Boards
Color-coded modular components have captured screws. This means no more lost screws, which simplifies assembly and troubleshooting.

Conveniently Located Dual-Voltage (120/230 VAC) Junction Box
Features heavy-duty surge protection and even includes a spare fuse.

Spacious Wiring Area
No exposed circuitry or loose wires. All circuit boards are encapsulated in polyurethane to protect them from moisture, insects, and temperature extremes.

PILOT-FC - SPECIFICATION BUILDER: ORDER 1 + 2 + 3

1 Model	2 Standard Features	3 Communication Options
Pilot-FC20 (20-station)	Plastic pedestal (gray) 120/230 VAC, 60/50 Hz dual-voltage transformer	S Standalone Field Controller with no central communications
Pilot-FC30 (30-station)		HWR Wired communications
Pilot-FC40 (40-station)		UHF UHF radio (license required)
Pilot-FC50 (50-station)		
Pilot-FC60 (60-station)		
Pilot-FC70 (70-station)		
Pilot-FC80 (80-station)		

Examples:

Pilot-FC40-S = 40-station, standalone Field Controller with no central communications

Pilot-FC70-HWR = 70-station Field Controller with wired communications

PILOT® INTEGRATED HUB SYSTEMS

Save money without sacrificing in-field sprinkler control with highly flexible and reliable Pilot Integrated Hub Systems.

Integrated Hub Systems use significantly less wire than conventional systems. This means lower costs, faster installation, and easier system diagnosis and repair if needed. They can be easily expanded — with minimal digging and disruption of turf — by adding more Pilot Two-Way Modules (TWMs) instead of running additional wires.

Pilot Two-Way Modules are available with 1-, 2-, 4-, and 6-station outputs, making it possible to run each head on an entire green with a single device. In all, TWMs let you operate about 1,000 stations up to approximately 1.5 mi from a single hub.

Pilot Two-Way Modules include built-in surge suppression, wirelessly programmable station addresses using the ICD-HP Programmer, and two-way communication with confirmation and status indication. Pilot Surge Suppressors are required when the system is installed with integrated TWMs.

The PilotFCP Utility enables remote scheduling from a computer or tablet for basic course irrigation management. It can be directly connected to a Pilot Field Controller, eliminating the need for a Pilot Field Interface and communication module in smaller systems.



TWM Hub

Water-Resistant Keypad

The backlit display and illuminated control panel mean you can easily access the hub, day or night

Diagnostic LED Indicators

For all functions on 250-station output modules

250-Station Output Modules

Enable your Integrated Hub System to expand with your course; start with 250 and grow to 999

Pilot TWMs

1- and 2-station:
Height: 3¾"
Width: 1½"
Depth: 1"
Weight: 5 oz

4- and 6-station:
Height: 3¾"
Width: 1¾"
Depth: 1½"
Weight: 9 oz



The distinct yellow design makes it much easier to find the modules in dark valve boxes or buried in the soil.

Pilot Surge Suppressor

All integrated TWM rotors include two DBRY-6 Splice Connectors for connection to the two-wire path. Integrated TWM systems require grounding with Pilot Surge Suppressors coupled to an appropriate grounding plate or rod. Hunter recommends a minimum of one Pilot Surge Suppressor for every 12 installed rotors or as per project specification.




PILOT-DH - SPECIFICATION BUILDER: ORDER 1 + 2 + 3

1 Model	2 Standard Features	3 Communication Options
Pilot-DH250 (250-station)		S Standalone TWM hub with no central communications
Pilot-DH500 (500-station)	Plastic pedestal (gray)	HWR Wired communications
Pilot-DH750 (750-station)	120/230 VAC, 60/50 Hz switching transformer	UHF UHF radio (license required)
Pilot-DH999 (999-station)		

Examples:

Pilot-DH250-S = 250-station, standalone TWM hub with no central communications

Pilot-DH999-HWR = 999-station TWM hub with wired communications

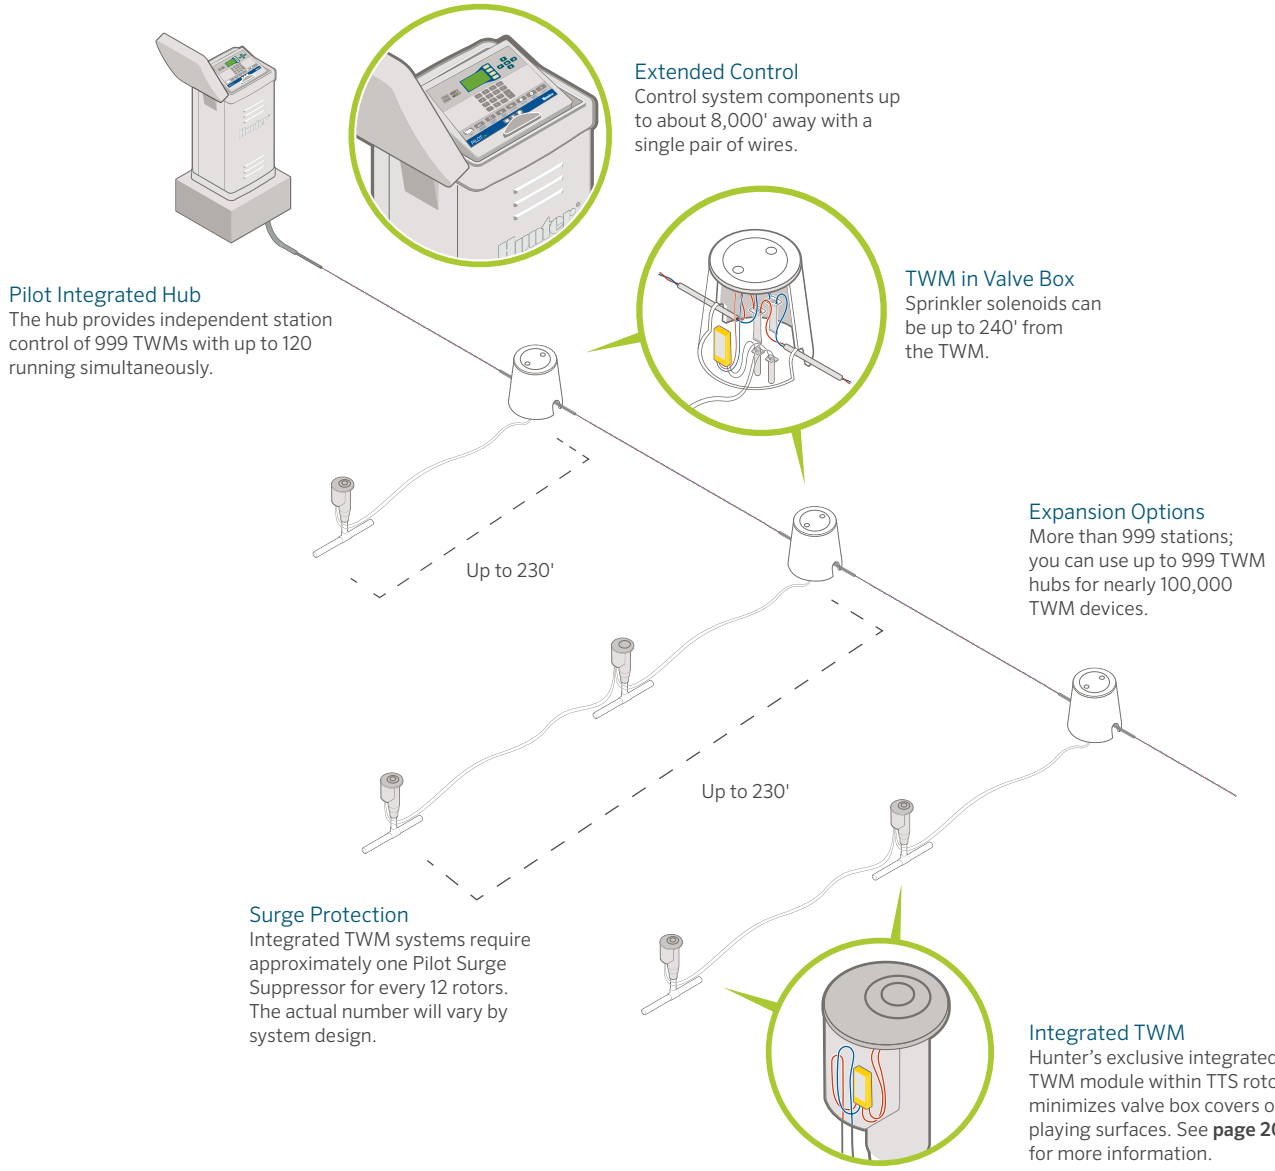

TWM - SPECIFICATION BUILDER: ORDER 1		
1	Model	2 Standard Features
	Pilot-100	1-station TWM
	Pilot-200	2-station TWM
	Pilot-400	4-station TWM
	Pilot-600	6-station TWM
	Pilot-SG	Inline surge suppression (for integrated TWM rotor systems)
		Built-in surge suppressor
		Waterproof DBRY-6 Splice Connectors included

Example:
Pilot-100 = 1-station TWM



Wireless Programming
The ICD-HP Programmer is used to test, troubleshoot, and program integrated TWMs. It allows you to wirelessly link directly to TWMs without removing the TTS cover. You can also use it to update the coding inside the TWM's microprocessor.

See the ICD-HP Programmer on page 13.

WEATHER STATION

Achieve and maintain the highest-quality playing surface with consistent, local weather data.

KEY BENEFITS

- Includes built-in 60-day data logger with onboard evapotranspiration (ET) calculation (modified Penman-Monteith equation for turfgrass)
- Wireless package uses 2.4 GHz license-free technology
 - 2.4 GHz radio systems can reach up to 2,600'
 - In rural areas, try the license-free, 900 MHz radio for links up to 2,600'
 - Wired systems use Hunter GCBL, direct-bury cable with a range of 400' (dedicated nine-pin serial computer port required)
- Optional Solar Panel Kit provides wireless power
 - Simple installation and versatile mounting with onboard 800 mAh rechargeable gel cell battery with 18 VDC transformer and 20' power cable
- Weatherproof construction: With UV-stabilized enclosure, weatherproof external connectors, and long-life coated circuit boards
- UL, cUL, and CE certifications



TurfWeather® Station

Height: 24"
Width: 16"
Depth: 15"
Weight: 13 lbs

COMPLETE PACKAGES INCLUDE HUNTER WEATHER SOFTWARE

Model	Description
TWHW	Wired communications to central computer (GCBL cable required)
TW24	2.4 GHz license-free radio communication to central computer
TW916	916 MHz license-free radio communication to central computer
TWSUN	Optional Solar Panel Kit for all TurfWeather models

Turfweather is a trademark of Campbell Scientific Inc.

MAINTENANCE RADIO

Save time and money with seamlessly integrated remote radio control.

KEY BENEFITS

- Hunter's innovative StraightTalk™ Technology enables wireless remote control at ranges up to 2 miles whether or not the central computer is turned on
- Instant control of stations, blocks, and programs
- Instant audio confirmation of commands
- Easy commands that show in display before sending
- Compact size, industrial construction
- Suitable for two-way voice communication with crews and office
- High signal output: 2 W, UHF (450 to 490 MHz)*

* License required



TRNR Radio

Height: 4"
Width: 2"
Depth: 1¼"
Weight: 7 oz

ICD-HP PROGRAMMER

Gain wireless, handheld programming and diagnostic capabilities for Pilot Two-Way Modules.

KEY BENEFITS

- Wirelessly program TWM addresses
- Program TWM station numbers in any order or skip stations for future expansion
- Turn stations on and view solenoid status, current in milliamps, and more
- Built-in voltmeter for testing communication path
- Communicates with TWMs directly through plastic case; wireless electromagnetic induction saves waterproof connectors
- Communicates through-the-top of integrated TWM rotor cases; no cover removal required



ICD-HP Programmer

Height: 8¼"
Width: 3⅞"
Depth: 2"

Packaged in an outdoor carrying case, this complete kit includes probes, an induction cup, cable, a USB power cable for bench use, and four AA batteries for fieldwork.

ICD-HP PROGRAMMER



ROTOR SOLUTIONS FOR EVERY GOLF COURSE

TTS-800 SERIES: THE MOST ADVANCED ROTORS IN THE GOLF INDUSTRY

Over the last four decades, Hunter Industries has built a longstanding reputation for innovation in the golf industry. Some of our revolutionary inventions include the first Windows-based central control system, the first Total-Top-Service (TTS) rotors, the first Decoder-in-Head (DIH) rotors with integrated Pilot Two-Way Modules, and the powerful and water-efficient G-85 Gear Drives.

Our newest products in this groundbreaking lineup are the TTS-800 Series Golf Rotors — the most innovative and technologically advanced rotors in the industry. Combining accuracy and power, they provide maximum uniformity and longevity in the field. They also reduce the challenges of reclaimed water use or poor water quality, thanks to their high-torque gear drives. The fast-access flange compartment is the golf sector's largest, and it can accommodate full-sized DBRY-6 Splice Connectors. Even routine maintenance is a breeze with Total-Top-Serviceability, which allows solenoid and pressure regulator servicing without mainline depressurization.

Whether your golf rotor needs fall into our budget-conscious B Series, the advanced G-800 Series, or our top-of-the-line TTS-800 Series, Hunter Industries offers a full range of solutions that will exceed your expectations and ensure beautiful, playable courses for years to come.



GOLF ROTORS



Look for this icon. All Hunter Golf rotors are 100% water-tested to ensure reliable operation once installed.



UNIFORMITY **YOU CAN COUNT ON**

Playability and water efficiency go hand-in-hand when it comes to golf course management. This means great distribution uniformity and proper irrigation scheduling are crucial to ensuring world-class performance and beautiful results.

Healthy, playable turf starts with top-level irrigation products — like Hunter's ultra-reliable TTS-800 Series Golf Rotors with their superior distribution uniformity. Couple this with the best support team in the business, and Hunter's golf solutions are second to none.

At Hunter Golf, we pride ourselves on providing products that set the standard in efficiency. Each year, we work directly with golf course superintendents worldwide to conduct comprehensive irrigation system audits that maximize water savings, reduce operating costs, and enhance the golf experience for players and course managers alike.

Choose Hunter Golf irrigation products for best-in-class performance and enhanced playability.

BEST-IN-CLASS GEAR DRIVES THAT SET THE STANDARD FOR PLAYABILITY

TTS-800 Series Golf Rotors



LEADING THE WAY WITH POWER, PERFORMANCE, AND VERSATILITY

We've spent decades of research and millions of dollars to develop the best gear drives in the golf industry. When we introduced the G-85 Gear Drive, it quickly earned the respect of golf superintendents for its powerful performance and unmatched reliability. It also became known for its exceptional versatility, which boosted its popularity even more. That's because the adjustable arc drive with triple forward-facing nozzles can be adjusted not only to a non-reversing, full-circle rotation. It also can be configured at the factory as a G-84 Gear Drive in an opposing-nozzle, full-circle configuration.

But we didn't stop there. Next, we added the direct-drive G-80 — a hybrid version that blends the G-85's outstanding platform with the proven G-80 Gearbox to create the best full-circle drive for the golf sector. Today, this revolutionary gear drive technology powers our full range of TTS-800 Series, G-800 Series, and B Series Golf Rotors. No matter which rotor is best for your golf irrigation needs, you can rest assured knowing that the most powerful gear drives in the industry will deliver long-lasting performance in every application.

GREATER FLEXIBILITY WITH DUAL-TRAJECTORY NOZZLES



Standard Nozzles



Low-Angle Nozzles

To ensure precise distribution uniformity, we created a dedicated set of short- and mid-range nozzles to complement our gear drives. When combined with the primary nozzles that the G-80, G-84, and G-85 share, they deliver precise targeting for any application.

Choose from a wide assortment of wind-fighting 22.5° standard trajectory nozzles or 15° low-angle trajectory nozzles. For maximum throw, uniform distribution, and reliable performance under any condition, Hunter gear drives offer everything you need.

TTS-800 SERIES GOLF ROTORS


ADVANCED FEATURES

With Total-Top-Service (TTS) Technology



Access Everything Through-the-top

This no-dig solution is appreciated by golfers, management, and especially the superintendent




Large and Flexible Yardage Marker Capabilities

Oversized marker plates with standard black or red, white, blue, and purple options




Largest Flange VIH Compartment in the Industry

Spacious cavity with enough room for full-sized DBRY-6 Splice Connectors




Unitized Inlet Valve Design Includes Serviceable Components

Contamination damage is quickly resolved with replaceable valve seat and seat seal



Easy Access and Servicing of Solenoid and Pressure Regulators

Color-coded components are removed and replaced without mainline depressurization




Exclusive Inlet Valve Includes Self-Cleaning Capabilities

Proprietary Filter Sentry™ Mechanism wipes debris from the stainless steel screen with every activation



Single-Point Fast-Access to Flange Compartment

Extra-thick compartment lid is retained with stainless steel ¼-turn fastener



Two-Stage Serviceable Filtration in Valve Circuitry

Oversized stainless steel screens at inlet valve and pilot valve are easily cleaned or replaced



Heavy-Duty Flanged and Ribbed Body Design

Impact-resistant and ultra-durable design includes extra-strength PVC Acme inlet



Three Cable Entry Ports at Base of Flange Compartment

Makes splice and cable connections fast, easy, and organized



Low-Bounce Rubber Cover Kit


Impact-absorbing design reduces ball ricochet around the greens



No-Bounce Turf Cup Kit


Recessed turf cup design is aesthetically clean and eliminates ball ricochet





Access Everything, Including Two-Way Modules, Through-the-top

This no-dig solution is appreciated by golfers, management, and especially the superintendent




Largest Flange DIH Compartment in the Industry

Spacious cavity with enough room for Pilot® Two-Way Modules and full-sized DBRY-6 Splice Connectors



Two-Way Modules Are Housed in the DIH Rotor's Spacious Flange Compartment

Improves playability and eliminates unsightly enclosures around the course



Programming Two-Way Modules Wirelessly From the Surface with No Disassembly

Quick and easy to program and perform diagnostics before or after installation with ICD-HP Programmer

TTS-800 SERIES GOLF ROTORS


ADVANCED FEATURES

With Integrated Two-Way Modules



Individual Two-Way Module and Solenoid Components Within Flange Compartment

Isolated/separated configuration minimizes yearly maintenance costs




Two-Station DIH Rotor Option

Perfect cost-effective solution for back-to-back heads around greens



State-of-the-Art Surge Suppression

Earth grounding is easily added with the Pilot Surge Suppressor




DIH Rotors Include All the Unique Features and Benefits of TTS Rotors

Makes splice and cable connections fast, easy, and clean



Seamless, No-Splice Connection Between Two-Way Module and Solenoid

Maintains ongoing electrical continuity with no connectors required



Durability, Efficiency, and Reliability from the Makers of the Industry's First TTS and DIH Rotors

Peace of mind from the world's leading producer of gear-driven rotors

TTS-800 SERIES



These rotors have Total-Top-Serviceability, powerful high-torque gear drives, and the largest flange compartment in the industry to accommodate all Pilot® Two-Way Module components.

KEY BENEFITS

- Dedicated, true full-circle model distinguished by a black collar
- Extra-large, fast access flange compartment to accommodate full-size DBRY-6 Splice Connectors and an integrated Pilot Two-Way Module
- Solenoid and pressure regulator are serviceable without system depressurization
- Exclusive PressurePort™ Nozzle Technology optimizes incoming pressure at each nozzle to increase consistency and maximize distribution uniformity
- High-torque gear drive is the strongest in the industry to mitigate the challenges of debris infiltration
- Proprietary Filter Sentry™ Mechanism cleans the filter with every opening and closing cycle
- All TTS-800 Series Golf Rotors advanced features listed on **pages 18 to 21**

OPERATING SPECIFICATIONS

- Radius: 49' to 97'
- Flow: 14.2 to 58.5 GPM
- Pressure range: 50 to 100 PSI
- All TTS rotors are pressure rated at 150 PSI
- Nozzle range: 15 to 53
 - 10 standard trajectory (22.5°) nozzles
 - 9 low-angle trajectory (15°) nozzles

OPTIONS

- C - Check-O-Matic Technology checks up to 25' in elevation change and readily converts to normally open hydraulic operation with through-the-top connections
- D - Decoder Valve-in-Head Technology with all "E" specifications below*
- DD - Two-station Decoder Valve-in-Head Technology with all "E" specifications below*
- E - Electric Valve-in-Head Technology with adjustable pressure regulation, on off-auto selector, 190 mA (350 mA inrush) solenoid with captive plunger and internal downstream bleed

* All DIH rotors include two DBRY-6 Splice Connectors for connection to the two-wire path. See **page 11** for critical recommendations on grounding DIH rotors.



GT-880
 Pop-up height: 3¾"
 Overall height: 11¾"
 Flange diameter: 7¼"
 Female inlet: 1½" Acme

GT-880 - SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Model	2 Valve Options	3 Nozzle	4 Regulation
GT-880 = Full-circle	C = Check-O-Matic Technology* D = Decoder Valve-in-Head Technology DD = Two-station decoder Valve-in-Head Technology E = Electric Valve-in-Head Technology *Converts to N.O. hydraulic Valve-in-Head Technology	15 to 53 = Installed G-880 nozzle	P5 = 50 PSI (nozzles 15 to 18) P6 = 65 PSI (nozzles 18 to 25) P8 = 80 PSI (nozzles 25 to 53)

Example:
 GT-880-E-48-P8 = GT-880 full-circle electric Valve-in-Head Technology, installed 48 nozzle, 80 PSI regulation

GOLF ROTORS

GT-880 NOZZLE PERFORMANCE DATA*							
Nozzle Set		Pressure	Radius	Flow	Precip in/hr		
		PSI	ft	GPM	■	▲	
●		50	49	14.2	0.57	0.66	
Tan	15 White	60	51	15.7	0.58	0.67	
803611		65	52	16.4	0.58	0.67	
●		70	53	17.0	0.58	0.67	
●		80	55	18.2	0.58	0.67	
●		50	56	17.2	0.53	0.61	
Tan	18 Orange	60	58	18.8	0.54	0.62	
803611		65	59	19.7	0.54	0.63	
●		70	60	20.0	0.53	0.62	
●		80	61	21.2	0.55	0.63	
●		50	57	18.4	0.55	0.63	
Tan	20 Brown	60	59	20.3	0.56	0.65	
803611		65	61	21.4	0.55	0.64	
●		70	63	21.6	0.52	0.60	
●		80	64	22.7	0.53	0.62	
●		50	63	21.6	0.52	0.60	
Tan	23 Green	60	65	23.0	0.52	0.61	
803611		65	66	24.0	0.53	0.61	
●		70	67	24.9	0.53	0.62	
●		80	68	26.6	0.55	0.64	
●		65	71	28.6	0.55	0.63	
Tan	25 Blue	70	73	29.7	0.54	0.62	
803611		80	74	31.7	0.56	0.64	
●		90	75	33.7	0.58	0.67	
●		100	77	35.8	0.58	0.67	
●		65	74	30.9	0.54	0.63	
Tan	33 Gray	70	75	32.0	0.55	0.63	
803611		80	77	34.2	0.56	0.64	
●		90	79	36.2	0.56	0.64	
●		100	81	38.2	0.56	0.65	
●		65	77	35.1	0.57	0.66	
Tan	38 Red	70	79	36.6	0.56	0.65	
803611		80	82	38.9	0.56	0.64	
●		90	84	41.3	0.56	0.65	
●		100	87	43.6	0.55	0.64	
●		-	-	-	-	-	-
Tan	43 Dk. Brown	70	83	41.3	0.58	0.67	
803611		80	85	43.6	0.58	0.67	
●		90	87	46.3	0.59	0.68	
●		100	89	48.8	0.59	0.68	
●		-	-	-	-	-	-
Dk. Brown	48 Dk. Green	70	90	46.9	0.56	0.64	
803610		80	92	48.9	0.56	0.64	
●		90	94	50.5	0.55	0.63	
●		100	96	53.5	0.56	0.65	
●		-	-	-	-	-	-
Dk. Brown	53 Dk. Blue	70	91	49.8	0.58	0.67	
803610		80	93	52.2	0.58	0.67	
●		90	95	55.5	0.59	0.68	
●		100	97	58.5	0.60	0.69	

● = Nozzle plug P/N 315300 installed in the front side of the nozzle housing.

* Complies to ASAE standard. All precipitation rates calculated for 360° operation. All triangular rates are equilateral.

GT-880 STANDARD NOZZLES GT-880 LOW-ANGLE NOZZLES**



** Low-angle nozzles reduce the radius by 15%.



Easy-Access Servicing

An extra-thick compartment lid is retained with a ¼-turn, stainless steel, single-point fastener.



Spacious Flange Compartment

The largest and deepest compartment in the industry offers plenty of room for full-sized DBRY-6 Splice Connectors.

TTS-800 SERIES



These rotors have Total-Top-Serviceability, powerful high-torque gear drives, and the largest flange compartment in the industry to accommodate all Pilot® Two-Way Module components.

KEY BENEFITS

- Adjustable model distinguished by a gray collar that comes factory set in a true full-circle configuration
- Extra-large, fast access flange compartment to accommodate full-size DBRY-6 Splice Connectors and an integrated Pilot Two-Way Module
- Solenoid and pressure regulator are serviceable without system depressurization
- Exclusive PressurePort™ Nozzle Technology optimizes incoming pressure at each nozzle to increase consistency and maximize distribution uniformity
- High-torque gear drive is the strongest in the industry to mitigate the challenges of debris infiltration
- Proprietary Filter Sentry™ Mechanism cleans the filter with every opening and closing cycle
- All TTS-800 Series Golf Rotors advanced features listed on pages 18 to 21



GT-884

Pop-up height: 3¾"
Overall height: 11¾"
Flange diameter: 7¼"
Female inlet: 1½" Acme

OPERATING SPECIFICATIONS

- Radius: 49' to 97'
- Flow: 14.2 to 58.5 GPM
- Pressure range: 50 to 100 PSI
- All TTS rotors are pressure rated at 150 PSI
- Nozzle range: 15 to 53
 - 10 standard trajectory (22.5°) nozzles
 - 9 low-angle trajectory (15°) nozzles

OPTIONS

- C - Check-O-Matic Technology checks up to 25' in elevation change and readily converts to normally open hydraulic operation with through-the-top connections
- D - Decoder Valve-in-Head Technology with all "E" specifications below*
- DD - Two-station Decoder Valve-in-Head Technology with all "E" specifications below*
- E - Electric Valve-in-Head Technology with adjustable pressure regulation, on-off-auto selector, 190 mA (350 mA inrush) solenoid with captive plunger and internal downstream bleed

* All DIH rotors include two DBRY-6 Splice Connectors for connection to the two-wire path. See page 11 for critical recommendations on grounding DIH rotors.

GT-884 - SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Model	2 Valve Options	3 Nozzle	4 Regulation
GT-884 = Full-circle (convertible to forward-facing adjustable arc rotor)	C = Check-O-Matic Technology* D = Decoder Valve-in-Head Technology DD = Two-station decoder Valve-in-Head Technology E = Electric Valve-in-Head Technology * Converts to N.O. hydraulic Valve-in-Head Technology	15 to 53 = Installed G-880 nozzle	P5 = 50 PSI (nozzles 15 to 18) P6 = 65 PSI (nozzles 18 to 25) P8 = 80 PSI (nozzles 25 to 53)

Example:

GT-884-E-48-P8 = GT-884 full-circle electric Valve-in-Head Technology, installed 48 nozzle, 80 PSI regulation

GT-884 NOZZLE PERFORMANCE DATA*							
Nozzle Set			Pressure	Radius	Flow	Precip in/hr	
			PSI	ft	GPM	■	▲
●		●	50	49	14.2	0.57	0.66
Tan	15	Gray	60	51	15.7	0.58	0.67
803611		White	65	52	16.4	0.58	0.67
		315317	70	53	17.0	0.58	0.67
			80	55	18.2	0.58	0.67
			50	56	17.2	0.53	0.61
Tan	18	Gray	60	58	18.8	0.54	0.62
803611		Orange	65	59	19.7	0.54	0.63
		315317	70	60	20.0	0.53	0.62
			80	61	21.2	0.55	0.63
			50	57	18.4	0.55	0.63
Tan	20	Gray	60	59	20.3	0.56	0.65
803611		Brown	65	61	21.4	0.55	0.64
		315317	70	63	21.6	0.52	0.60
			80	64	22.7	0.53	0.62
			50	63	21.6	0.52	0.60
Tan	23	Lt. Blue	60	65	23.0	0.52	0.61
803611		Green	65	66	24.0	0.53	0.61
		315311	70	67	24.9	0.53	0.62
			80	68	26.6	0.55	0.64
			65	71	28.6	0.55	0.63
Tan	25	Lt. Blue	70	73	29.7	0.54	0.62
803611		Blue	80	74	31.7	0.56	0.64
		315311	90	75	33.7	0.58	0.67
			100	77	35.8	0.58	0.67
			65	74	30.9	0.54	0.63
Tan	33	Lt. Blue	70	75	32.0	0.55	0.63
803611		Gray	80	77	34.2	0.56	0.64
		315311	90	79	36.2	0.56	0.64
			100	81	38.2	0.56	0.65
			65	77	35.1	0.57	0.66
Tan	38	Lt. Blue	70	79	36.6	0.56	0.65
803611		Red	80	82	38.9	0.56	0.64
		315311	90	84	41.3	0.56	0.65
			100	87	43.6	0.55	0.64
			-	-	-	-	-
Tan	43	Blue	70	83	41.3	0.58	0.67
803611		Dk. Brown	80	85	43.6	0.58	0.67
		315315	90	87	46.3	0.59	0.68
			100	89	48.8	0.59	0.68
			-	-	-	-	-
Dk. Brown	48	Dk. Blue	70	90	46.9	0.56	0.64
803610		Dk. Green	80	92	48.9	0.56	0.64
		833500	90	94	50.5	0.55	0.63
			100	96	53.5	0.56	0.65
			-	-	-	-	-
Dk. Brown	53	Dk. Blue	70	91	49.8	0.58	0.67
803610		Dk. Blue	80	93	52.2	0.58	0.67
			90	95	55.5	0.59	0.68
			100	97	58.5	0.60	0.69
			-	-	-	-	-


● = Nozzle plug P/N 315300 installed in the front side of the nozzle housing.

* Complies to ASAE standard. All precipitation rates calculated for 360° operation. All triangular rates are equilateral.

GT-884 STANDARD NOZZLES GT-884 LOW-ANGLE NOZZLES**



** Low-angle nozzles reduce the radius by 15%.

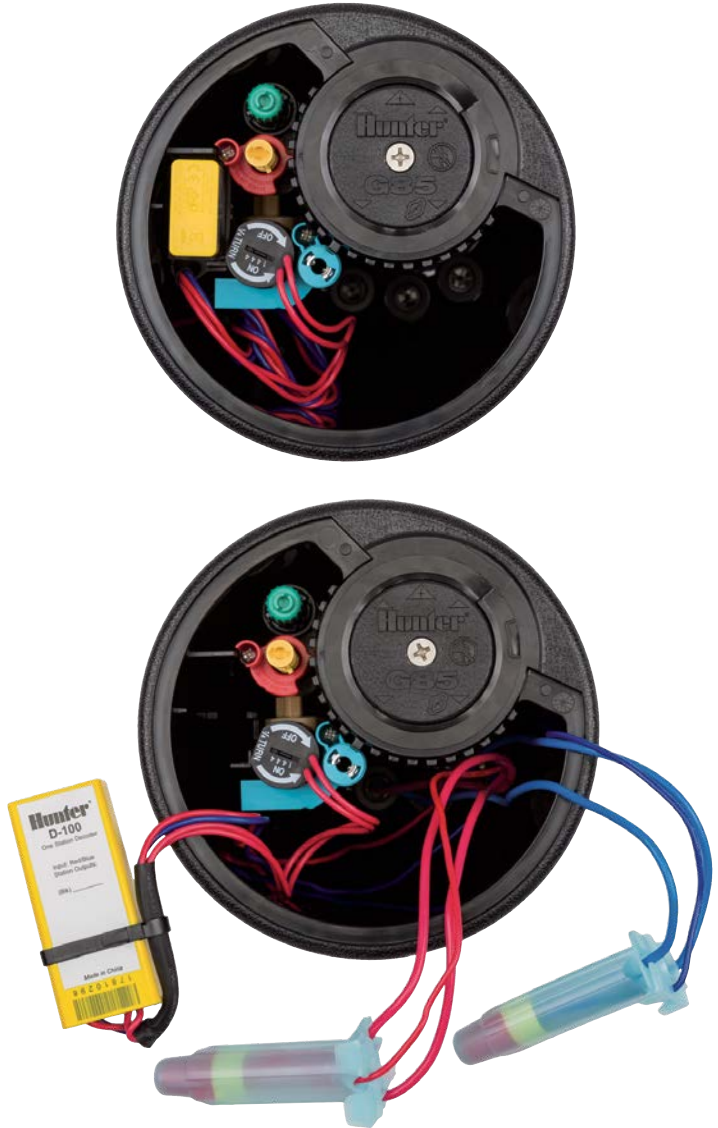

Room to Spare

Adding a Pilot® Two-Way Module does not reduce flange compartment space. The exclusive configuration provides extra room for full-sized DBRY-6 Splice Connectors and multiple cables.

TTS-800 SERIES



These rotors have Total-Top-Serviceability, powerful high-torque gear drives, and the largest flange compartment in the industry to accommodate all Pilot® Two-Way Module components.

KEY BENEFITS

- Adjustable model distinguished by a gray collar that comes factory set in a part-circle configuration (60° to 360°)
- Extra-large, fast access flange compartment to accommodate full-size DBRY-6 Splice Connectors and an integrated Pilot Two-Way Module
- Solenoid and pressure regulator are serviceable without system depressurization
- Exclusive PressurePort™ Nozzle Technology optimizes incoming pressure at each nozzle to increase consistency and maximize distribution uniformity
- High-torque gear drive is the strongest in the industry to mitigate the challenges of debris infiltration
- Proprietary Filter Sentry™ Mechanism cleans the filter with every opening and closing cycle
- All TTS-800 Series Golf Rotors advanced features listed on **pages 18 to 21**

OPERATING SPECIFICATIONS

- Radius: 37' to 94'
- Flow: 8.9 to 59.6 GPM
- Pressure range: 50 to 100 PSI
- All TTS rotors are pressure rated at 150 PSI
- Nozzle range: 10 to 53
 - 12 standard trajectory (22.5°) nozzles
 - 9 low-angle trajectory (15°) nozzles

OPTIONS

- C - Check-O-Matic Technology checks up to 25' in elevation change and readily converts to normally open hydraulic operation with through-the-top connections
- D - Decoder Valve-in-Head Technology with all "E" specifications below*
- DD - Two-station Decoder Valve-in-Head Technology with all "E" specifications below*
- E - Electric Valve-in-Head Technology with adjustable pressure regulation, on-off-auto selector, 190mA (350mA inrush) solenoid with captive plunger and internal downstream bleed

* All DIH rotors include two DBRY-6 Splice Connectors for connection to the two-wire path. See **page 11** for critical recommendations on grounding DIH rotors.



GT-885

Pop-up height: 3¾"
Overall height: 11¾"
Flange diameter: 7¼"
Female inlet: 1½" Acme

GT-885 – SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Model	2 Valve Options	3 Nozzle	4 Regulation
GT-885 = Full-/part-circle, 60° to 360° arc range	<p>C = Check-O-Matic Technology*</p> <p>D = Decoder Valve-in-Head Technology</p> <p>DD = Two-station decoder Valve-in-Head Technology</p> <p>E = Electric Valve-in-Head Technology</p> <p>*Converts to N.O. hydraulic Valve-in-Head Technology</p>	10 to 53 = Installed G-885 nozzle	<p>P5 = 50 PSI (nozzles 10 to 18)</p> <p>P6 = 65 PSI (nozzles 18 to 25)</p> <p>P8 = 80 PSI (nozzles 25 to 53)</p>

Example:

GT-885-E-48-P8 = GT-885 full-/part-circle electric Valve-in-Head Technology, installed 48 nozzle, 80 PSI regulation

GT-885 NOZZLE PERFORMANCE DATA*

Nozzle Set			Pressure	Radius	Flow	Precip in/hr	
			PSI	ft	GPM	■	▲
Orange 803603 ●	10 ●	Dk. Green 315312	50	37	8.9	0.63	0.72
			60	39	9.8	0.62	0.72
			65	41	10.2	0.58	0.67
		Lt. Green	-	-	-	-	-
Orange 803603 ●	13 ●	White 315314	50	47	11.4	0.50	0.57
			60	48	12.3	0.51	0.59
			65	49	12.9	0.52	0.60
		Lt. Blue	-	-	-	-	-
Orange 803603 ●	15 ●	White 315314	50	52	12.9	0.46	0.53
			60	52	14.5	0.52	0.60
			65	53	14.9	0.51	0.59
		70	53	15.5	0.53	0.61	
Orange 803603 ●	18 ●	Lt. Green 315313	50	57	16.6	0.49	0.57
			60	58	17.8	0.51	0.59
			65	59	18.6	0.51	0.59
		70	60	19.4	0.52	0.60	
Orange 803603 ●	20 ●	Lt. Green 315313	50	59	17.9	0.49	0.57
			60	61	19.5	0.50	0.58
			65	62	19.8	0.50	0.57
		70	63	20.6	0.50	0.58	
Orange 803603 ●	23 ●	Lt. Green 315313	50	65	20.2	0.46	0.53
			60	66	22.1	0.49	0.56
			65	67	23.9	0.51	0.59
		70	67	24.2	0.52	0.60	
Orange 803603 ●	25 ●	Lt. Green 315310	50	65	20.2	0.46	0.53
			60	66	22.1	0.49	0.56
			65	67	23.9	0.51	0.59
		70	67	24.2	0.52	0.60	
Red 803602 ●	25 ●	Blue 315310	65	71	28.3	0.54	0.62
			70	72	29.3	0.54	0.63
			80	73	31.5	0.57	0.66
		90	74	33.4	0.59	0.68	
Red 803602 ●	33 ●	Blue 315310	65	72	30.6	0.57	0.66
			70	73	31.6	0.57	0.66
			80	75	33.9	0.58	0.67
		90	77	35.8	0.58	0.67	
Red 803602 ●	38 ●	Gray 315310	65	76	34.9	0.58	0.67
			70	78	36.2	0.57	0.66
			80	80	39.1	0.59	0.68
		90	82	41.2	0.59	0.68	
Red 803602 ●	43 ●	Red 315310	100	84	43.5	0.59	0.69
			70	81	41.2	0.60	0.70
			80	83	43.5	0.61	0.70
		90	86	46.2	0.60	0.69	
Dk. Red 803601 ●	48 ●	Dk. Brown 315310	100	89	48.7	0.59	0.68
			70	83	46.3	0.65	0.75
			80	85	48.4	0.64	0.74
		90	89	51.7	0.63	0.73	
Dk. Red 803601 ●	53 ●	Dk. Green 315312	100	91	54.5	0.63	0.73
			70	87	50.7	0.64	0.74
			80	89	53.1	0.65	0.75
		90	92	56.4	0.64	0.74	
Dk. Red 803601 ●	53 ●	Dk. Blue	100	94	59.6	0.65	0.75

● = Nozzle plug P/N 315300 installed in the back side of the nozzle housing.


* Complies to ASAE standard. All precipitation rates calculated for 360° operation. All triangular rates are equilateral.

GT-885 STANDARD NOZZLES

GT-885 LOW-ANGLE NOZZLES**



** Low-angle nozzles reduce the radius by 15%.

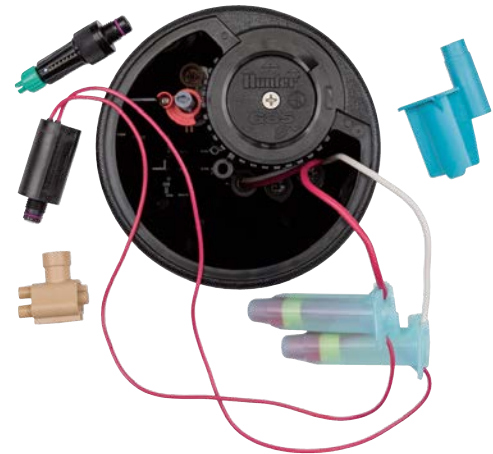

Reduced Downtime

There is no need to depressurize the mainline for solenoid and pressure regulator servicing.



Total-Top-Service Solution

From the originators of TTS Technology, Hunter's no-dig TTS-800 Series Golf Rotors provide total-top-servicing of every serviceable component.

TTS-800 SERIES



These rotors have Total-Top-Serviceability, shorter-radius, lower-flow internals, and the largest flange compartment in the industry to accommodate all Pilot® Two-Way Module components.

KEY BENEFITS

- Adjustable, shorter-radius model (50° to 360°)
- Extra-large, fast access flange compartment to accommodate full-size DBRY-6 Splice Connectors and an integrated Pilot Two-Way Module
- Solenoid and pressure regulator are serviceable without system depressurization
- Proprietary Filter Sentry™ Mechanism cleans the filter with every opening and closing cycle
- All TTS-800 Series Golf Rotors advanced features listed on **pages 18 to 21**

OPERATING SPECIFICATIONS

- Radius: 18' to 50'
- Flow: 1.9 to 12.8 GPM
- Pressure range: 40 to 65 PSI
- All TTS rotors are pressure rated at 150 PSI
- Nozzle range: 2 to 12

OPTIONS

- C - Check-O-Matic Technology checks up to 25' in elevation change and readily converts to normally open hydraulic operation with through-the-top connections
- D - Decoder Valve-in-Head Technology with all "E" specifications below*
- DD - Two-station Decoder Valve-in-Head Technology with all "E" specifications below*
- E - Electric Valve-in-Head Technology with adjustable pressure regulation, on-off-auto selector, 190 mA (350 mA inrush) solenoid with captive plunger and internal downstream bleed

* All DIH rotors include two DBRY-6 Splice Connectors for connection to the two-wire path. See **page 11** for critical recommendations on grounding DIH rotors.



GT-835

Pop-up height: 3¾"
Overall height: 11¾"
Flange diameter: 7¼"
Female inlet: 1½" Acme

GT-835 – SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4


1 Model	2 Valve Options	3 Nozzle	4 Regulation
GT-835 = Full-/part-circle, 50° to 360°	<p>C = Check-O-Matic Technology Technology*</p> <p>D = Decoder Valve-in-Head Technology</p> <p>E = Electric Valve-in-Head Technology</p> <p>*Converts to N.O. hydraulic Valve-in-Head Technology</p>	6 = Installed G-835 nozzle (includes 8-nozzle rack)	<p>P5 = 50 PSI (nozzles 18 to 25)</p> <p>P6 = 65 PSI (nozzles 18 to 25)</p>

Example:

GT-835-6-P5 = GT-835 full-/part-circle electric Valve-in-Head Technology, installed 6 nozzle, 50 PSI regulation

GT-835 NOZZLE PERFORMANCE DATA*					
Nozzle	Pressure PSI	Radius ft	Flow GPM	Precip in/hr	
				■	▲
2 ● Yellow	40	18	1.9	0.56	0.65
	50	20	2.1	0.51	0.58
	60	22	2.4	0.48	0.55
	65	23	2.6	0.47	0.55
3 ● Yellow	40	23	3.0	0.55	0.63
	50	25	3.2	0.49	0.57
	60	27	3.5	0.46	0.53
4 ● Yellow	40	25	3.9	0.60	0.69
	50	28	4.1	0.50	0.58
	60	30	4.4	0.47	0.54
	65	31	4.6	0.46	0.53
5 ● Yellow	40	29	4.7	0.54	0.62
	50	32	5.0	0.47	0.54
	60	33	5.3	0.47	0.54
6 ● Yellow	40	32	6.0	0.56	0.65
	50	35	6.3	0.50	0.57
	60	37	6.6	0.46	0.54
	65	39	6.8	0.43	0.50
8 ● Yellow	40	36	7.8	0.58	0.67
	50	39	8.0	0.51	0.58
	60	42	8.3	0.45	0.52
10 ● Yellow	40	39	9.7	0.61	0.71
	50	43	10.1	0.53	0.61
	60	45	10.3	0.49	0.57
	65	47	10.5	0.46	0.53
12 ● Yellow	40	44	12.0	0.60	0.69
	50	47	12.2	0.53	0.61
	60	48	12.5	0.52	0.60
	65	50	12.8	0.49	0.57

* Complies to ASAE standard. All precipitation rates calculated for 360° operation. All triangular rates are equilateral.

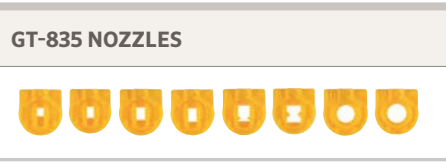

Optional Yardage Marker Colors

Extra-large, snap-in marker plates are available in standard black as well as optional red, white, and blue to meet every golf course preference. Or choose the purple plate for identification when courses are using reclaimed water.



Low-Bounce Rubber Cover Kit - P/N 987200SP

Reduce the incoming bounce from balls hitting rotors that are surrounding the greens.



No-Bounce Turf Cup Kit - P/N 987100SP

Eliminate errant bounces from balls hitting rotors that surround greens with this subsurface rotor-mounting solution.

G-800 SERIES



These rotors feature convenient no-dig Total-Top-Serviceability and a powerful, high-torque gear drive.

KEY BENEFITS

- Dedicated, true full-circle model distinguished by a black collar
- Exclusive PressurePort™ Nozzle Technology optimizes incoming pressure at each nozzle to increase consistency and maximize distribution uniformity
- High-torque gear drive is the strongest in the industry to mitigate the challenges of debris infiltration
- Proprietary Filter Sentry™ Mechanism cleans the filter with every opening and closing cycle

OPERATING SPECIFICATIONS

- Radius: 49' to 97'
- Flow: 14.2 to 58.5 GPM
- Pressure range: 50 to 100 PSI
- All TTS rotors are pressure rated at 150 PSI
- Nozzle range: 15 to 53
 - 10 standard trajectory (22.5°) nozzles
 - 9 low-angle trajectory (15°) nozzles

OPTIONS

- C - Check-O-Matic Technology checks up to 25' in elevation change and readily converts to normally open hydraulic operation with through-the-top connections
- D - Decoder Valve-in-Head Technology with all "E" specifications below*
- DD - Two-station Decoder Valve-in-Head Technology with all "E" specifications below*
- E - Electric Valve-in-Head Technology with adjustable pressure regulation, on-off-auto selector, 190 mA (350 mA inrush) solenoid with captive plunger and internal downstream bleed

* All DIH rotors include two DBRY-6 Splice Connectors for connection to the two-wire path. See **page 11** for critical recommendations on grounding DIH rotors.



G-880C
Pop-up height: 3¾"
Overall height: 11¾"
Flange diameter: 7¼"
Female inlet: 1½" Acme



G-880E
Pop-up height: 3¾"
Overall height: 11¾"
Flange diameter: 7¼"
Female inlet: 1½" Acme

G-880 - SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Model	2 Valve Options	3 Nozzle	4 Regulation
G-880 = Full-circle	<p>C = Check-O-Matic Technology*</p> <p>D = Decoder Valve-in-Head Technology</p> <p>DD = Two-station decoder Valve-in-Head Technology</p> <p>E = Electric Valve-in-Head Technology</p> <p>*Converts to N.O. hydraulic Valve-in-Head Technology</p>	15 to 53 = Installed G-880 nozzle	<p>P5 = 50 PSI (nozzles 15 to 18)</p> <p>P6 = 65 PSI (nozzles 18 to 25)</p> <p>P8 = 80 PSI (nozzles 25 to 53)</p>

Example:
G-880-E-33-P8 = G-880 full-circle electric Valve-in-Head Technology, installed 33 nozzle, 80 PSI regulation

G-880 NOZZLE PERFORMANCE DATA*							
Nozzle Set		Pressure	Radius	Flow	Precip in/hr		
		PSI	ft	GPM	■	▲	
●	●	50	49	14.2	0.57	0.66	
Tan	○	60	51	15.7	0.58	0.67	
803611	15	65	52	16.4	0.58	0.67	
●	●	70	53	17.0	0.58	0.67	
803611	White	80	55	18.2	0.58	0.67	
●	●	50	56	17.2	0.53	0.61	
Tan	○	60	58	18.8	0.54	0.62	
803611	18	65	59	19.7	0.54	0.63	
803611	Orange	70	60	20.0	0.53	0.62	
803611	315317	80	61	21.2	0.55	0.63	
●	●	50	57	18.4	0.55	0.63	
Tan	○	60	59	20.3	0.56	0.65	
803611	20	65	61	21.4	0.55	0.64	
803611	Brown	70	63	21.6	0.52	0.60	
803611	315317	80	64	22.7	0.53	0.62	
●	●	50	63	21.6	0.52	0.60	
Tan	○	60	65	23.0	0.52	0.61	
803611	23	65	66	24.0	0.53	0.61	
803611	Green	70	67	24.9	0.53	0.62	
803611	315311	80	68	26.6	0.55	0.64	
●	●	65	71	28.6	0.55	0.63	
Tan	○	70	73	29.7	0.54	0.62	
803611	25	80	74	31.7	0.56	0.64	
803611	Blue	90	75	33.7	0.58	0.67	
803611	315311	100	77	35.8	0.58	0.67	
●	●	65	74	30.9	0.54	0.63	
Tan	○	70	75	32.0	0.55	0.63	
803611	33	80	77	34.2	0.56	0.64	
803611	Gray	90	79	36.2	0.56	0.64	
803611	315311	100	81	38.2	0.56	0.65	
●	●	65	77	35.1	0.57	0.66	
Tan	○	70	79	36.6	0.56	0.65	
803611	38	80	82	38.9	0.56	0.64	
803611	Red	90	84	41.3	0.56	0.65	
803611	315311	100	87	43.6	0.55	0.64	
●	●	-	-	-	-	-	
Tan	○	70	83	41.3	0.58	0.67	
803611	43	80	85	43.6	0.58	0.67	
803611	Dk. Brown	90	87	46.3	0.59	0.68	
803611	315315	100	89	48.8	0.59	0.68	
●	●	-	-	-	-	-	
Dk. Brown	○	70	90	46.9	0.56	0.64	
803610	48	80	92	48.9	0.56	0.64	
803610	Dk. Green	90	94	50.5	0.55	0.63	
803610	833500	100	96	53.5	0.56	0.65	
●	●	-	-	-	-	-	
Dk. Brown	○	70	91	49.8	0.58	0.67	
803610	53	80	93	52.2	0.58	0.67	
803610	Dk. Blue	90	95	55.5	0.59	0.68	
803610	833500	100	97	58.5	0.60	0.69	

● = Nozzle plug P/N 315300 installed in the front side of the nozzle housing.

* Complies to ASAE standard. All precipitation rates calculated for 360° operation. All triangular rates are equilateral.

G-880 STANDARD NOZZLES

G-880 LOW-ANGLE NOZZLES**



** Low-angle nozzles reduce the radius by 15%.



TTS Means Convenience and Versatility

With TTS Technology, every serviceable component of the rotor can be easily accessed anytime with no servicing mess.

G-800 SERIES



These rotors feature convenient no-dig Total-Top-Serviceability and a powerful, high-torque gear drive.

KEY BENEFITS

- Adjustable model distinguished by a gray collar that comes factory set in a true full-circle configuration
- Exclusive PressurePort™ Nozzle Technology optimizes incoming pressure at each nozzle to increase consistency and maximize distribution uniformity
- High-torque gear drive is the strongest in the industry to mitigate the challenges of debris infiltration
- Proprietary Filter Sentry™ Mechanism cleans the filter with every opening and closing cycle

OPERATING SPECIFICATIONS

- Radius: 49' to 97'
- Flow: 14.2 to 58.5 GPM
- Pressure range: 50 to 100 PSI
- All TTS rotors are pressure rated at 150 PSI
- Nozzle range: 15 to 53
 - 10 standard trajectory (22.5°) nozzles
 - 9 low-angle trajectory (15°) nozzles

OPTIONS

- C - Check-O-Matic Technology checks up to 25' in elevation change and readily converts to normally open hydraulic operation with through-the-top connections
- D - Decoder Valve-in-Head Technology with all "E" specifications below*
- DD - Two-station Decoder Valve-in-Head Technology with all "E" specifications below*
- E - Electric Valve-in-Head Technology with adjustable pressure regulation, on-off-auto selector, 190 mA (350 mA inrush) solenoid with captive plunger and internal downstream bleed

* All DIH rotors include two DBRY-6 Splice Connectors for connection to the two-wire path. See **page 11** for critical recommendations on grounding DIH rotors.



G-884C
Pop-up height: 3¾"
Overall height: 11¾"
Flange diameter: 7¼"
Female inlet: 1½" Acme



G-884E
Pop-up height: 3¾"
Overall height: 11¾"
Flange diameter: 7¼"
Female inlet: 1½" Acme

G-884 - SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Model	2 Valve Options	3 Nozzle	4 Regulation
G-884 = Full-circle (convertible to forward-facing adjustable arc rotor)	C = Check-O-Matic Technology* D = Decoder Valve-in-Head Technology DD = Two-station decoder Valve-in-Head Technology E = Electric Valve-in-Head Technology *Converts to N.O. hydraulic Valve-in-Head Technology	15 to 53 = Installed G-880 nozzle	P5 = 50 PSI (nozzles 15 to 18) P6 = 65 PSI (nozzles 18 to 25) P8 = 80 PSI (nozzles 25 to 53)

Example:

G-884-E-33-P8 = G-884 full-circle electric Valve-in-Head Technology, installed 33 nozzle, 80 PSI regulation

G-884 NOZZLE PERFORMANCE DATA*							
Nozzle Set		Pressure	Radius	Flow	Precip in/hr		
		PSI	ft	GPM	■	▲	
●		50	49	14.2	0.57	0.66	
Tan	15	60	51	15.7	0.58	0.67	
803611		65	52	16.4	0.58	0.67	
		70	53	17.0	0.58	0.67	
		80	55	18.2	0.58	0.67	
●		50	56	17.2	0.53	0.61	
Tan	18	60	58	18.8	0.54	0.62	
803611		65	59	19.7	0.54	0.63	
		70	60	20.0	0.53	0.62	
		80	61	21.2	0.55	0.63	
●		50	57	18.4	0.55	0.63	
Tan	20	60	59	20.3	0.56	0.65	
803611		65	61	21.4	0.55	0.64	
		70	63	21.6	0.52	0.60	
		80	64	22.7	0.53	0.62	
●		50	63	21.6	0.52	0.60	
Tan	23	60	65	23.0	0.52	0.61	
803611		65	66	24.0	0.53	0.61	
		70	67	24.9	0.53	0.62	
		80	68	26.6	0.55	0.64	
●		65	71	28.6	0.55	0.63	
Tan	25	70	73	29.7	0.54	0.62	
803611		80	74	31.7	0.56	0.64	
		90	75	33.7	0.58	0.67	
		100	77	35.8	0.58	0.67	
●		65	74	30.9	0.54	0.63	
Tan	33	70	75	32.0	0.55	0.63	
803611		80	77	34.2	0.56	0.64	
		90	79	36.2	0.56	0.64	
		100	81	38.2	0.56	0.65	
●		65	77	35.1	0.57	0.66	
Tan	38	70	79	36.6	0.56	0.65	
803611		80	82	38.9	0.56	0.64	
		90	84	41.3	0.56	0.65	
		100	87	43.6	0.55	0.64	
●		-	-	-	-	-	
Tan	43	70	83	41.3	0.58	0.67	
803611		80	85	43.6	0.58	0.67	
		90	87	46.3	0.59	0.68	
		100	89	48.8	0.59	0.68	
●		-	-	-	-	-	
Dk. Brown	48	70	90	46.9	0.56	0.64	
803610		80	92	48.9	0.56	0.64	
		90	94	50.5	0.55	0.63	
		100	96	53.5	0.56	0.65	
●		-	-	-	-	-	
Dk. Brown	53	70	91	49.8	0.58	0.67	
803610		80	93	52.2	0.58	0.67	
		90	95	55.5	0.59	0.68	
		100	97	58.5	0.60	0.69	

● = Nozzle plug P/N 315300 installed in the front side of the nozzle housing.

* Complies to ASAE standard. All precipitation rates calculated for 360° operation. All triangular rates are equilateral.

G-884 STANDARD NOZZLES

G-884 LOW-ANGLE NOZZLES**



** Low-angle nozzles reduce radius by 15%



G-885 Rotor with Total-Top-Serviceability and Decoder-in-Head Technology

TTS Flange Compartment

All TTS rotors include ample room for solenoid splice connections and a Pilot® Two-Way Module when needed.

G-800 SERIES



These rotors feature convenient no-dig Total-Top-Serviceability and a powerful, high-torque gear drive.

KEY BENEFITS

- Adjustable model distinguished by a gray collar that comes factory set in a part-circle configuration (60° to 360°)
- Exclusive PressurePort™ Nozzle Technology optimizes incoming pressure at each nozzle to increase consistency and maximize distribution uniformity
- High-torque gear drive is the strongest in the industry to mitigate the challenges of debris infiltration
- Proprietary Filter Sentry™ Mechanism cleans the filter with every opening and closing cycle

OPERATING SPECIFICATIONS

- Radius: 37' to 94'
- Flow: 8.9 to 59.6 GPM
- Pressure range: 50 to 100 PSI
- All TTS rotors are pressure rated at 150 PSI
- Nozzle range: 10 to 53
 - 12 standard trajectory (22.5°) nozzles
 - 9 low-angle trajectory (15°) nozzles

OPTIONS

- C - Check-O-Matic Technology checks up to 25' in elevation change and readily converts to normally open hydraulic operation with through-the-top connections
- D - Decoder Valve-in-Head Technology with all "E" specifications below*
- DD - Two-station Decoder Valve-in-Head Technology with all "E" specifications below*
- E - Electric Valve-in-Head Technology with adjustable pressure regulation, on-off-auto selector, 190 mA (350mA inrush) solenoid with captive plunger and internal downstream bleed

* All DIH rotors include two DBRY-6 Splice Connectors for connection to the two-wire path. See **page 11** for critical recommendations on grounding DIH rotors.



G-885C

Pop-up height: 3¾"
Overall height: 11¾"
Flange diameter: 7¼"
Female inlet: 1½" Acme



G-885E

Pop-up height: 3¾"
Overall height: 11¾"
Flange diameter: 7¼"
Female inlet: 1½" Acme

G-885 - SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Model	2 Valve Options	3 Nozzle	4 Regulation
G-885 = Full-/part-circle 60° to 360° arc range	<p>C = Check-O-Matic Technology*</p> <p>D = Decoder Valve-in-Head Technology</p> <p>DD = Two-station decoder Valve-in-Head Technology</p> <p>E = Electric Valve-in-Head Technology</p> <p>*Converts to N.O. hydraulic Valve-in-Head Technology</p>	10 to 53 = Installed G-885 nozzle	<p>P5 = 50 PSI (nozzles 10 to 18)</p> <p>P6 = 65 PSI (nozzles 18 to 25)</p> <p>P8 = 80 PSI (nozzles 25 to 53)</p>

Example:

G-885-E-33-P8 = G-885 full-/part-circle electric Valve-in-Head Technology, installed 33 nozzle, 80 PSI regulation

G-885 NOZZLE PERFORMANCE DATA*							
Nozzle Set			Pressure	Radius	Flow	Precip in/hr	
			PSI	ft	GPM	■	▲
Orange 803603 ●	10	Dk. Green	50	37	8.9	0.63	0.72
			60	39	9.8	0.62	0.72
			65	41	10.2	0.58	0.67
		Lt. Green	-	-	-	-	-
Orange 803603 ●	13	White	50	47	11.4	0.50	0.57
			60	48	12.3	0.51	0.59
			65	49	12.9	0.52	0.60
		Lt. Blue	-	-	-	-	-
Orange 803603 ●	15	White	50	52	12.9	0.46	0.53
			60	52	14.5	0.52	0.60
			65	53	14.9	0.51	0.59
			70	53	15.5	0.53	0.61
		White	80	54	16.5	0.54	0.63
Orange 803603 ●	18	Lt. Green	50	57	16.6	0.49	0.57
			60	58	17.8	0.51	0.59
			65	59	18.6	0.51	0.59
			70	60	19.4	0.52	0.60
		Orange	80	61	20.5	0.53	0.61
Orange 803603 ●	20	Lt. Green	50	59	17.9	0.49	0.57
			60	61	19.5	0.50	0.58
			65	62	19.8	0.50	0.57
			70	63	20.6	0.50	0.58
Orange 803603 ●	23	Lt. Green	50	65	20.2	0.46	0.53
			60	66	22.1	0.49	0.56
			65	67	23.9	0.51	0.59
		Green	80	69	25.9	0.52	0.60
Red 803602 ●	25	Green	65	71	28.3	0.54	0.62
			70	72	29.3	0.54	0.63
			80	73	31.5	0.57	0.66
			90	74	33.4	0.59	0.68
		Blue	100	75	35.4	0.61	0.70
Red 803602 ●	33	Green	65	72	30.6	0.57	0.66
			70	73	31.6	0.57	0.66
			80	75	33.9	0.58	0.67
			90	77	35.8	0.58	0.67
		Gray	100	79	37.9	0.58	0.67
Red 803602 ●	38	Green	65	76	34.9	0.58	0.67
			70	78	36.2	0.57	0.66
			80	80	39.1	0.59	0.68
			90	82	41.2	0.59	0.68
		Red	100	84	43.5	0.59	0.69
Red 803602 ●	43	Green	-	-	-	-	-
			70	81	41.2	0.60	0.70
			80	83	43.5	0.61	0.70
			90	86	46.2	0.60	0.69
Dk. Red 803601 ●	48	Dk. Green	-	-	-	-	-
			70	83	46.3	0.65	0.75
			80	85	48.4	0.64	0.74
			90	89	51.7	0.63	0.73
Dk. Red 803601 ●	53	Dk. Green	-	-	-	-	-
			70	87	50.7	0.64	0.74
			80	89	53.1	0.65	0.75
			90	92	56.4	0.64	0.74
		Dk. Blue	100	94	59.6	0.65	0.75

● = Nozzle plug P/N 315300 installed in the back side of the nozzle housing.

* Complies to ASAE standard. All precipitation rates calculated for 360° operation. All triangular rates are equilateral.

G-885 STANDARD NOZZLES

G-885 LOW-ANGLE NOZZLES**



** Low-angle nozzles reduce the radius by 15%.



Contour Back-Nozzle Capabilities

Whether you want a little extra green behind your adjustable arc TTS rotors or a more modeled look to your fairway's hard edges, contour back-nozzles are here to make your vision a reality. Choose from four short-range or four mid-range nozzles to suit your needs.

CONTOUR BACK-NOZZLE PERFORMANCE DATA

P/N	Color	Profile	65 PSI		80 PSI	
			Radius	GPM	Radius	GPM
803604	Peach		25	3.4	27	3.9
803603	Orange		28	3.8	29	4.2
803602	Red		31	4.2	33	4.5
803601	Dk. Red		34	4.6	36	4.9
315314	White		37	2.8	38	2.9
315313	Lt. Green		42	4.3	44	4.7
315310	Green		46	5.2	48	5.7
315312	Dk. Green		49	7.9	51	8.8

GT-885/G-885 CONTOUR BACK-NOZZLES



QuickSet-360 with Ratcheting Riser

Setting up your adjustable arc TTS rotor is fast and simple. The integrated ratcheting mechanism allows a simple twist of the riser to align the right-side reversing point. These rotors are also easily convertible to a true non-reversing full-circle with our exclusive QuickSet-360 feature.

G-800 SERIES



These rotors feature convenient no-dig Total-Top-Serviceability and a shorter-radius, lower-flow internals.

KEY BENEFITS

- Adjustable, shorter-radius model (50° to 360°)
- Proprietary Filter Sentry™ Mechanism cleans the filter with every opening and closing cycle

OPERATING SPECIFICATIONS

- Radius: 18' to 50'
- Flow: 1.9 to 12.8 GPM
- Pressure range: 40 to 65 PSI
- All TTS rotors are pressure rated at 150 PSI
- Nozzle range: 2 to 12

OPTIONS

- C - Check-O-Matic Technology checks up to 25' in elevation change and readily converts to normally open hydraulic operation with through-the-top connections
- D - Decoder Valve-in-Head Technology with all "E" specifications below*
- DD - Two-station Decoder Valve-in-Head Technology with all "E" specifications below*
- E - Electric Valve-in-Head Technology with adjustable pressure regulation, on-off-auto selector, 190 mA (350 mA inrush) solenoid with captive plunger and internal downstream bleed

* All DIH rotors include two DBRY-6 Splice Connectors for connection to the two-wire path. See **page 11** for critical recommendations on grounding DIH rotors.



G-835C
Pop-up height: 3"
Overall height: 11¾"
Flange diameter: 7¾"
Female inlet: 1½" Acme



G-835E
Pop-up height: 3"
Overall height: 11¾"
Flange diameter: 7¾"
Female inlet: 1½" Acme

G-835 - SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Model	2 Valve Options	3 Nozzle	4 Regulation
G-835 = Full-/part-circle, 50° to 360°	<p>C = Check-O-Matic Technology *</p> <p>D = Decoder Valve-in-Head Technology</p> <p>E = Electric Valve-in-Head Technology</p> <p>*Converts to N.O. hydraulic Valve-in-Head Technology</p>	<p>6 = Installed G-835 nozzle (includes 8-nozzle rack)</p>	<p>P5 = 50 PSI (nozzles 2 to 12)</p> <p>P6 = 65 PSI (nozzles 10 to 12)</p>

Example:
G-835E-6-P6 = G-835 full-/part-circle electric Valve-in-Head Technology, installed 6 nozzle, 50 PSI regulation

G-835 NOZZLE PERFORMANCE DATA*					
Nozzle	Pressure PSI	Radius ft	Flow GPM	Precip in/hr	
				■	▲
2 ● Yellow	40	18	1.9	0.56	0.65
	50	20	2.1	0.51	0.58
	60	22	2.4	0.48	0.55
	65	23	2.6	0.47	0.55
3 ● Yellow	40	23	3.0	0.55	0.63
	50	25	3.2	0.49	0.57
	60	27	3.5	0.46	0.53
4 ● Yellow	40	25	3.9	0.60	0.69
	50	28	4.1	0.50	0.58
	60	30	4.4	0.47	0.54
	65	31	4.6	0.46	0.53
5 ● Yellow	40	29	4.7	0.54	0.62
	50	32	5.0	0.47	0.54
	60	33	5.3	0.47	0.54
6 ● Yellow	40	32	6.0	0.56	0.65
	50	35	6.3	0.50	0.57
	60	37	6.6	0.46	0.54
	65	39	6.8	0.43	0.50
8 ● Yellow	40	36	7.8	0.58	0.67
	50	39	8.0	0.51	0.58
	60	42	8.3	0.45	0.52
	65	43	8.5	0.44	0.51
10 ● Yellow	40	39	9.7	0.61	0.71
	50	43	10.1	0.53	0.61
	60	45	10.3	0.49	0.57
	65	47	10.5	0.46	0.53
12 ● Yellow	40	44	12.0	0.60	0.69
	50	47	12.2	0.53	0.61
	60	48	12.5	0.52	0.60
	65	50	12.8	0.49	0.57



* Complies to ASAE standard. All precipitation rates calculated for 360° operation. All triangular rates are equilateral.



QuickSet-360

With Hunter's QuickCheck Arc Mechanism and patented QuickSet-360 non-reversing full-circle feature in a variable arc rotor, adjustments are fast, easy, and more flexible than ever before. Now available on all TTS-800 Series, G-800 Series, and B Series adjustable arc rotors.

B SERIES



These highly efficient block rotors have a powerful gear drive backed by the reliability synonymous with the Hunter name.

KEY BENEFITS

- Dedicated, true full-circle model distinguished by a black collar
- Exclusive PressurePort™ Nozzle Technology optimizes incoming pressure at each nozzle to increase consistency and maximize distribution uniformity
- High-torque gear drive is the strongest in the industry to mitigate the challenges of debris infiltration

OPERATING SPECIFICATIONS

- G-80-B
 - Radius: 49' to 97'
 - Flow: 14.2 to 58.5 GPM
 - Pressure range: 65 to 100 PSI
- All B Series Rotors are pressure rated at 150 PSI
- Check height up to 7' in elevation change
- Nozzle range: 15 to 53
 - 10 standard trajectory (22.5°) nozzles
 - 9 low-angle trajectory (15°) nozzles



G-80-B

Pop-up height: 3"
Overall height: 9 5/8"
Flange diameter: 5 3/8"
Female inlet: 1 1/4" Acme

G-80-B – SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Model	2 Valve Options	3 Nozzle	4 Options*
G-80 = Full-circle	B = Block rotor with check valve	15 to 53 = Installed G-80 nozzle* *SSU = 18, 25, or 48	S = SSU* *Standard stocking unit

Example:

G-80-B-25-S = G-80 full-circle block rotor, installed 25 nozzle, standard stocking unit model

G-80-B NOZZLE PERFORMANCE DATA*

Nozzle Set		Pressure	Radius	Flow	Precip in/hr		
		PSI	ft	GPM	■	▲	
●							
Tan	15 White	●	50	49	14.2	0.57	0.66
803611		●	60	51	15.7	0.58	0.67
●		65	52	16.4	0.58	0.67	
●		70	53	17.0	0.58	0.67	
●		80	55	18.2	0.58	0.67	
●							
Tan	18 Orange	●	50	56	17.2	0.53	0.61
803611		●	60	58	18.8	0.54	0.62
●		65	59	19.7	0.54	0.63	
●		70	60	20.0	0.53	0.62	
●		80	61	21.2	0.55	0.63	
●							
Tan	20 Brown	●	50	57	18.4	0.55	0.63
803611		●	60	59	20.3	0.56	0.65
●		65	61	21.4	0.55	0.64	
●		70	63	21.6	0.52	0.60	
●		80	64	22.7	0.53	0.62	
●							
Tan	23 Green	●	50	63	21.6	0.52	0.60
803611		●	60	65	23.0	0.52	0.61
●		65	66	24.0	0.53	0.61	
●		70	67	24.9	0.53	0.62	
●		80	68	26.6	0.55	0.64	
●							
Tan	25 Blue	●	65	71	28.6	0.55	0.63
803611		●	70	73	29.7	0.54	0.62
●		80	74	31.7	0.56	0.64	
●		90	75	33.7	0.58	0.67	
●		100	77	35.8	0.58	0.67	
●							
Tan	33 Gray	●	65	74	30.9	0.54	0.63
803611		●	70	75	32.0	0.55	0.63
●		80	77	34.2	0.56	0.64	
●		90	79	36.2	0.56	0.64	
●		100	81	38.2	0.56	0.65	
●							
Tan	38 Red	●	65	77	35.1	0.57	0.66
803611		●	70	79	36.6	0.56	0.65
●		80	82	38.9	0.56	0.64	
●		90	84	41.3	0.56	0.65	
●		100	87	43.6	0.55	0.64	
●							
Tan	43 Dk. Brown	●	-	-	-	-	-
803611		●	70	83	41.3	0.58	0.67
●		80	85	43.6	0.58	0.67	
●		90	87	46.3	0.59	0.68	
●		100	89	48.8	0.59	0.68	
●							
Dk. Brown	48 Dk. Green	●	-	-	-	-	-
803610		●	70	90	46.9	0.56	0.64
●		80	92	48.9	0.56	0.64	
●		90	94	50.5	0.55	0.63	
●		100	96	53.5	0.56	0.65	
●							
Dk. Brown	53 Dk. Blue	●	-	-	-	-	-
803610		●	70	91	49.8	0.58	0.67
●		80	93	52.2	0.58	0.67	
●		90	95	55.5	0.59	0.68	
●		100	97	58.5	0.60	0.69	

● = Nozzle plug P/N 315300 installed in the front side of the nozzle housing.

G-80-B NOZZLES



LOW-ANGLE NOZZLES**



** Low-angle nozzles reduce the radius by 15%.

B SERIES



These highly efficient block rotors have a powerful gear drive backed by the reliability synonymous with the Hunter name.

KEY BENEFITS

- G-84-B
 - Adjustable model distinguished by a gray collar that comes factory set in a true full-circle configuration
 - Exclusive PressurePort™ Nozzle Technology optimizes incoming pressure at each nozzle to increase consistency and maximize distribution uniformity
 - High-torque gear drive is the strongest in the industry to mitigate the challenges of debris infiltration
- G-85-B
 - Adjustable model distinguished by a gray collar that comes factory set in a part-circle configuration (60° to 360°)
 - Exclusive PressurePort™ Nozzle Technology optimizes incoming pressure at each nozzle to increase consistency and maximize distribution uniformity
 - High-torque gear drive is the strongest in the industry to mitigate the challenges of debris infiltration



G-84-B

Pop-up height: 3"
Overall height: 9½"
Flange diameter: 5¾"
Female inlet: 1¼" Acme



G-85-B

Pop-up height: 3"
Overall height: 9½"
Flange diameter: 5¾"
Female inlet: 1¼" Acme

OPERATING SPECIFICATIONS

- G-84-B
 - Radius: 49' to 97'
 - Flow: 14.2 to 58.5 GPM
 - Pressure range: 65 to 100 PSI
 - Check height up to 7' in elevation change
 - Nozzle range: 15 to 53
 - 10 standard trajectory (22.5°) nozzles
 - 9 low-angle trajectory (15°) nozzles
- G-85-B
 - Radius: 37' to 94'
 - Flow: 8.9 to 59.6 GPM
 - Pressure range: 50 to 100 PSI
 - Check height up to 7' in elevation change
 - Nozzle range: 10 to 53
 - 12 standard trajectory (22.5°) nozzles
 - 9 low-angle trajectory (15°) nozzles
- All B Series Golf Rotors are pressure-rated at 10 bar; 1,000 kPa

G-84-B & G-85-B - SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Model	2 Valve Options	3 Nozzle	4 Options*
G-84 = Full-circle	B = Block rotor with check valve	15 to 53 = Installed G-84 nozzle* *SSU = 18, 25, or 48	S = SSU* *Standard stocking unit
G-85 = Full-/part-circle, 60° to 360°	B = Block rotor with check valve	10 to 53 = Installed G-85 nozzle** **SSU = 18, 25, or 48	S = SSU* *Standard stocking unit

Example:

G-85-B-25-S = G-85 part-circle block rotor, installed 25 nozzle, standard stocking unit model

G-84-B NOZZLE PERFORMANCE DATA*

Nozzle Set			Pressure	Radius	Flow	Precip in/hr	
			PSI	ft	GPM	■	▲
● Tan 803611	○ 15 White	● Gray 315317	50	49	14.2	0.57	0.66
		● Gray 315317	60	51	15.7	0.58	0.67
		● Gray 315317	65	52	16.4	0.58	0.67
		● Gray 315317	70	53	17.0	0.58	0.67
● Tan 803611	○ 18 Orange	● Gray 315317	50	56	17.2	0.53	0.61
		● Gray 315317	60	58	18.8	0.54	0.62
		● Gray 315317	65	59	19.7	0.54	0.63
		● Gray 315317	70	60	20.0	0.53	0.62
● Tan 803611	○ 20 Brown	● Gray 315317	50	57	18.4	0.55	0.63
		● Gray 315317	60	59	20.3	0.56	0.65
		● Gray 315317	65	61	21.4	0.55	0.64
		● Gray 315317	70	63	21.6	0.52	0.60
● Tan 803611	○ 23 Green	● Lt. Blue 315311	50	63	21.6	0.52	0.60
		● Lt. Blue 315311	60	65	23.0	0.52	0.61
		● Lt. Blue 315311	65	66	24.0	0.53	0.61
		● Lt. Blue 315311	70	67	24.9	0.53	0.62
● Tan 803611	○ 25 Blue	● Lt. Blue 315311	65	71	28.6	0.55	0.63
		● Lt. Blue 315311	70	73	29.7	0.54	0.62
		● Lt. Blue 315311	80	74	31.7	0.56	0.64
		● Lt. Blue 315311	90	75	33.7	0.58	0.67
● Tan 803611	○ 33 Gray	● Lt. Blue 315311	65	74	30.9	0.54	0.63
		● Lt. Blue 315311	70	75	32.0	0.55	0.63
		● Lt. Blue 315311	80	77	34.2	0.56	0.64
		● Lt. Blue 315311	90	79	36.2	0.56	0.64
● Tan 803611	○ 38 Red	● Lt. Blue 315311	100	81	38.2	0.56	0.65
		● Lt. Blue 315311	65	77	35.1	0.57	0.66
		● Lt. Blue 315311	70	79	36.6	0.56	0.65
		● Lt. Blue 315311	80	82	38.9	0.56	0.64
● Tan 803611	○ 43 Dk. Brown	● Blue 315315	90	84	41.3	0.56	0.65
		● Blue 315315	100	87	43.6	0.55	0.64
		● Blue 315315	70	83	41.3	0.58	0.67
		● Blue 315315	80	85	43.6	0.58	0.67
● Dk. Brown 803610	○ 48 Dk. Green	● Dk. Blue 833500	90	87	46.3	0.59	0.68
		● Dk. Blue 833500	100	89	48.8	0.59	0.68
		● Dk. Blue 833500	70	90	46.9	0.56	0.64
		● Dk. Blue 833500	80	92	48.9	0.56	0.64
● Dk. Brown 803610	○ 53 Dk. Blue	● Dk. Blue 833500	90	94	50.5	0.55	0.63
		● Dk. Blue 833500	100	96	53.5	0.56	0.65
		● Dk. Blue 833500	70	91	49.8	0.58	0.67
		● Dk. Blue 833500	80	93	52.2	0.58	0.67

● = Nozzle plug P/N 315300 installed in the front side of the nozzle housing.



LOW-ANGLE NOZZLES**



** Low-angle nozzles reduce radius by 15%.

G-85-B NOZZLE PERFORMANCE DATA*

Nozzle Set			Pressure	Radius	Flow	Precip in/hr	
			PSI	ft	GPM	■	▲
● Orange 803603	○ Lt. Green 10	● Dk. Green 315312	50	37	8.9	0.63	0.72
		● Dk. Green 315312	60	39	9.8	0.62	0.72
		● Dk. Green 315312	65	41	10.2	0.58	0.67
		● Dk. Green 315312	-	-	-	-	-
● Orange 803603	○ Lt. Blue 13	● White 315314	50	47	11.4	0.50	0.57
		● White 315314	60	48	12.3	0.51	0.59
		● White 315314	65	49	12.9	0.52	0.60
		● White 315314	-	-	-	-	-
● Orange 803603	○ White 15	● White 315314	50	52	12.9	0.46	0.53
		● White 315314	60	52	14.5	0.52	0.60
		● White 315314	65	53	14.9	0.51	0.59
		● White 315314	70	53	15.5	0.53	0.61
● Orange 803603	○ Lt. Green 18	● Lt. Green 315313	80	54	16.5	0.54	0.63
		● Lt. Green 315313	50	57	16.6	0.49	0.57
		● Lt. Green 315313	60	58	17.8	0.51	0.59
		● Lt. Green 315313	65	59	18.6	0.51	0.59
● Orange 803603	○ Orange 20	● Lt. Green 315313	70	60	19.4	0.52	0.60
		● Lt. Green 315313	80	61	20.5	0.53	0.61
		● Lt. Green 315313	50	59	17.9	0.49	0.57
		● Lt. Green 315313	60	61	19.5	0.50	0.58
● Orange 803603	○ Tan 23	● Lt. Green 315313	65	62	19.8	0.50	0.57
		● Lt. Green 315313	70	63	20.6	0.50	0.58
		● Lt. Green 315313	80	64	22.1	0.52	0.60
		● Lt. Green 315313	50	65	20.2	0.46	0.53
● Red 803602	○ Lt. Green 25	● Lt. Green 315310	60	66	22.1	0.49	0.56
		● Lt. Green 315310	65	67	23.9	0.51	0.59
		● Lt. Green 315310	70	67	24.2	0.52	0.60
		● Lt. Green 315310	80	69	25.9	0.52	0.60
● Red 803602	○ Blue 33	● Green 315310	65	71	28.3	0.54	0.62
		● Green 315310	70	72	29.3	0.54	0.63
		● Green 315310	80	73	31.5	0.57	0.66
		● Green 315310	90	74	33.4	0.59	0.68
● Red 803602	○ Blue 38	● Green 315310	100	75	35.4	0.61	0.70
		● Green 315310	65	72	30.6	0.57	0.66
		● Green 315310	70	73	31.6	0.57	0.66
		● Green 315310	80	75	33.9	0.58	0.67
● Red 803602	○ Gray 43	● Green 315310	90	77	35.8	0.58	0.67
		● Green 315310	100	79	37.9	0.58	0.67
		● Green 315310	65	76	34.9	0.58	0.67
		● Green 315310	70	78	36.2	0.57	0.66
● Dk. Red 803601	○ Lt. Green 48	● Dk. Green 315312	80	80	39.1	0.59	0.68
		● Dk. Green 315312	90	82	41.2	0.59	0.68
		● Dk. Green 315312	100	84	43.5	0.59	0.69
		● Dk. Green 315312	70	81	41.2	0.60	0.70
● Dk. Red 803601	○ Lt. Green 53	● Dk. Green 315312	80	83	43.5	0.61	0.70
		● Dk. Green 315312	90	86	46.2	0.60	0.69
		● Dk. Green 315312	100	89	48.7	0.59	0.68
		● Dk. Green 315312	70	83	46.3	0.65	0.75
● Dk. Red 803601	○ Lt. Green 53	● Dk. Green 315312	80	85	48.4	0.64	0.74
		● Dk. Green 315312	90	89	51.7	0.63	0.73
		● Dk. Green 315312	100	91	54.5	0.63	0.73
		● Dk. Green 315312	70	87	50.7	0.64	0.74
● Dk. Red 803601	○ Lt. Green 53	● Dk. Green 315312	80	89	53.1	0.65	0.75
		● Dk. Green 315312	90	92	56.4	0.64	0.74
		● Dk. Green 315312	100	94	59.6	0.65	0.75
		● Dk. Green 315312	70	87	50.7	0.64	0.74

● = Nozzle plug P/N 315300 installed in the back side of the nozzle housing.

* Complies to ASAE standard. All precipitation rates calculated for 360° operation. All triangular rates are equilateral.

B SERIES



These cost-effective block rotors have a powerful gear drive backed by the reliability synonymous with the Hunter name.

KEY BENEFITS

- G-70-B is a dedicated, true full-circle model
- G-75-B is an adjustable part-circle model (50° to 360°)

OPERATING SPECIFICATIONS

- G-70-B
 - Radius: 53' to 75'
 - Flow: 13 to 33.7 GPM
 - Pressure range: 50 to 100 PSI
- G-75-B
 - Radius: 47' to 71'
 - Flow: 7.7 to 32.3 GPM
 - Pressure range: 40 to 100 PSI
- All B Series Rotors are pressure rated at 150 PSI
- Check height up to 7' in elevation change
- Nozzle range: 8 to 28
 - G-70-B has 6 standard trajectory (25°) nozzles
 - G-75-B has 9 standard trajectory (25°) nozzles



G-70-B

Pop-up height: 3"
Overall height: 9"
Flange diameter: 4¾"
Female inlet: 1¼" Acme



G-75-B

Pop-up height: 3"
Overall height: 9"
Flange diameter: 4¾"
Female inlet: 1¼" Acme

G-70-B & G-75-B - SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Model	2 Valve Options	3 Nozzle	4 Options
G-70 = Full-circle	B = Block rotor with check valve	25 = Installed G-70 nozzle * * Available in SSU model only SSU = 25 (includes nozzle pack)	S = SSU * * Standard stocking unit
G-75 = Full-/part-circle, 50° to 360° arc range	B = Block rotor with check valve	25 = Installed G-75 nozzle ** ** Available in SSU model only SSU = 25 (includes nozzle pack)	S = SSU * * Standard stocking unit

Example:

G-70-B-25-S = G-70 full-circle block rotor, installed 25 nozzle with nozzle pack, standard stocking unit model

GOLF ROTORS

G-70-B NOZZLE PERFORMANCE DATA*					
Nozzle	Pressure PSI	Radius ft	Flow GPM	Precip in/hr	
				■	▲
15 ● Gray	50	53	13.0	0.45	0.51
	60	54	14.1	0.47	0.54
	65	55	14.8	0.47	0.54
	70	56	15.5	0.48	0.55
	80	58	16.3	0.47	0.54
18 ● Red	50	58	14.2	0.41	0.47
	60	59	15.9	0.44	0.51
	65	60	16.3	0.44	0.50
	70	60	16.9	0.45	0.52
	80	61	17.8	0.46	0.53
20 ● Dk. Brown	60	61	18.8	0.49	0.56
	65	62	19.6	0.49	0.57
	70	63	20.5	0.50	0.57
	80	64	22.0	0.52	0.60
	90	64	23.4	0.55	0.63
23 ● Dk. Green	60	63	20.1	0.49	0.56
	65	65	21.0	0.48	0.55
	70	65	21.9	0.50	0.58
	80	66	23.4	0.52	0.60
	90	67	24.9	0.53	0.62
25 ● Dk. Blue	60	65	21.8	0.50	0.57
	65	67	22.5	0.48	0.56
	70	67	23.6	0.51	0.58
	80	69	25.3	0.51	0.59
	90	71	26.9	0.51	0.59
28 ● Black	70	71	28.1	0.54	0.62
	80	71	29.9	0.57	0.66
	90	73	31.8	0.57	0.66
	100	75	33.7	0.58	0.67

* Complies to ASAE standard. All precipitation rates calculated for 360° operation. All triangular rates are equilateral.

G-75-B NOZZLE PERFORMANCE DATA*					
Nozzle	Pressure PSI	Radius ft	Flow GPM	Precip in/hr	
				■	▲
8 ● Lt. Brown	40	47	7.7	0.34	0.39
	50	49	8.3	0.33	0.38
	60	50	9.2	0.35	0.41
	65	50	9.5	0.37	0.42
	70	51	9.9	0.37	0.42
10 ● Lt. Green	50	53	10.9	0.37	0.43
	60	54	12.0	0.40	0.46
	65	54	12.5	0.41	0.48
	70	55	13.1	0.42	0.48
	80	56	14.3	0.44	0.51
13 ● Lt. Blue	50	55	11.2	0.36	0.41
	60	56	12.3	0.38	0.44
	65	56	12.8	0.39	0.45
	70	57	13.3	0.39	0.45
	80	57	14.3	0.42	0.49
15 ● Gray	50	57	13.4	0.40	0.46
	60	58	14.3	0.41	0.47
	65	59	14.8	0.41	0.47
	70	59	15.3	0.42	0.49
	80	60	16.4	0.44	0.51
18 ● Red	50	60	14.5	0.39	0.45
	60	61	15.7	0.41	0.47
	65	61	16.3	0.42	0.49
	70	62	16.9	0.42	0.49
	80	63	18.2	0.44	0.51
20 ● Dk. Brown	60	62	17.8	0.45	0.51
	65	62	18.2	0.46	0.53
	70	63	19.2	0.47	0.54
	80	64	20.5	0.48	0.56
	90	65	21.8	0.50	0.57
23 ● Dk. Green	60	64	21.9	0.51	0.59
	65	65	21.4	0.49	0.56
	70	65	23.6	0.54	0.62
	80	66	25.6	0.57	0.65
	90	67	27.0	0.58	0.67
25 ● Dk. Blue	60	65	23.5	0.54	0.62
	65	65	24.8	0.56	0.65
	70	67	25.6	0.55	0.63
	80	69	27.3	0.55	0.64
	90	71	29.0	0.55	0.64
28 ● Black	70	66	26.9	0.59	0.69
	80	68	28.9	0.60	0.69
	90	70	30.6	0.60	0.69
	100	71	32.3	0.62	0.71

G-70-B & G-75-B NOZZLES



G-70-B



G-75-B

B SERIES



These cost-effective block rotors have shorter-radius, lower-flow nozzles for use in smaller areas.

KEY BENEFITS

- Adjustable, shorter-radius model (50° to 360°)

OPERATING SPECIFICATIONS

- G-35-B
 - Radius: 18' to 50'
 - Flow: 1.9 to 12.8 GPM
 - Pressure range: 40 to 65 PSI
- All B Series Rotors are pressure rated at 150 PSI
- Check height up to 7' in elevation change
- Nozzle range: 2 to 12



G-35-B

Pop-up height: 3"
Overall height: 9"
Flange diameter: 4¾"
Female inlet: 1¼" Acme

G-35-B - SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Model	2 Valve Options	3 Nozzle	4 Options*
G-35 = Full-/part-circle 50° to 360°	B = Block rotor with check valve	6 = Installed G-35 nozzle* * Available in SSU model only SSU = 6 (includes nozzle rack)	S = SSU* * Standard stocking unit

Example:

G-35-B-6-S = G-35 full-/part-circle block rotor, installed 6 nozzle with nozzle rack, standard stocking unit model

G-35-B NOZZLE PERFORMANCE DATA*					
Nozzle	Pressure PSI	Radius ft	Flow GPM	Precip in/hr	
				■	▲
2 ● Yellow	40	18	1.9	0.56	0.65
	50	20	2.1	0.51	0.58
	60	22	2.4	0.48	0.55
	65	23	2.6	0.47	0.55
3 ● Yellow	40	23	3.0	0.55	0.63
	50	25	3.2	0.49	0.57
	60	27	3.5	0.46	0.53
4 ● Yellow	40	25	3.9	0.60	0.69
	50	28	4.1	0.50	0.58
	60	30	4.4	0.47	0.54
	65	31	4.6	0.46	0.53
5 ● Yellow	40	29	4.7	0.54	0.62
	50	32	5.0	0.47	0.54
	60	33	5.3	0.47	0.54
	65	35	5.4	0.42	0.49
6 ● Yellow	40	32	6.0	0.56	0.65
	50	35	6.3	0.50	0.57
	60	37	6.6	0.46	0.54
	65	39	6.8	0.43	0.50
8 ● Yellow	40	36	7.8	0.58	0.67
	50	39	8.0	0.51	0.58
	60	42	8.3	0.45	0.52
	65	43	8.5	0.44	0.51
10 ● Yellow	40	39	9.7	0.61	0.71
	50	43	10.1	0.53	0.61
	60	45	10.3	0.49	0.57
	65	47	10.5	0.46	0.53
12 ● Yellow	40	44	12.0	0.60	0.69
	50	47	12.2	0.53	0.61
	60	48	12.5	0.52	0.60
	65	50	12.8	0.49	0.57

G-35-B NOZZLES



* Complies to ASAE standard. All precipitation rates calculated for 360° operation. All triangular rates are equilateral.

G-35-B ROTOR



G-900 SERIES



These rotors are simple to install and perfect for retrofits. Total-Top-Serviceability makes field maintenance quick and easy.

KEY BENEFITS

- G-990 is a dedicated, true full-circle model
- G-995 is an adjustable part-circle model (40° to 360°)
- Higher-flow, longer-radius rotor designed for single-row systems
- Contour back-nozzle capability for special applications

OPERATING SPECIFICATIONS

- G-990
 - Radius: 89' to 103'
 - Flow: 54.2 to 83.3 GPM
 - Pressure range: 80 to 120 PSI
- G-995
 - Radius: 81' to 97'
 - Flow: 54.9 to 83.8 GPM
 - Pressure range: 80 to 120 PSI
- All TTS rotors are pressure rated at 150 PSI
- Nozzle range: 53 to 73
 - 3 standard trajectory (22.5°) nozzles
 - 3 low-angle trajectory (15°) nozzles

OPTIONS

- C - Check-O-Matic Technology checks up to 25' in elevation change and readily converts to normally open hydraulic operation with through-the-top connections
- D - Decoder Valve-in-Head Technology with all "E" specifications below*
- DD - Two-station Decoder Valve-in-Head Technology with all "E" specifications below*
- E - Electric Valve-in-Head Technology with adjustable pressure regulation, on-off-auto selector, 190 mA (350mA inrush) solenoid with captive plunger and internal downstream bleed

* All DIH rotors include two DBRY-6 Splice Connectors for connection to the two-wire path. See **page 11** for critical recommendations on grounding DIH rotors.



G-990C

Pop-up height: 3"
Overall height: 13¼"
Flange diameter: 7½"
Femal inlet: 1½" Acme



G-995E

Pop-up height: 3"
Overall height: 13¼"
Flange diameter: 7½"
Female inlet: 1½" Acme

G-990 & G-995 - SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4 + 5

1 Model	2 Valve Options	3 Nozzle	4 Regulation*	5 Options
G-990 = Full-circle	C = Check-O-Matic Technology* D = Decoder Valve-in-Head Technology DD = Two-station decoder Valve-in-Head Technology E = Electric Valve-in-Head Technology	53 to 73 = Installed G-990 nozzle*	P8 = 80 PSI (nozzle 53) P1 = 100 PS (nozzles 53 to 73) P2 = 120 PSI (nozzle 73)	S = SSU*
G-995 = Adjustable arc, 40° to 360°	C = Check-O-Matic Technology* D = Decoder Valve-in-Head Technology DD = Two-station decoder Valve-in-Head Technology E = Electric Valve-in-Head Technology *Converts to N.O. hydraulic Valve-in-Head Technology	53 to 73 = Installed G-995 nozzle* * SSU = 53	P8 = 80 PSI (nozzle 53) P1 = 100 PSI (nozzles 53 to 73) P2 = 120 PSI (nozzle 73) * SSU = P8/53	S = SSU* *Standard stocking unit

Example:

G-990-E-53-P8-S = G-990 full-circle electric Valve-in-Head Technology, installed 53 nozzle, 80 PSI; 5.5 bar; 550 kPa regulation, standard stocking unit model


G-990 NOZZLE PERFORMANCE DATA*					
Nozzle	Pressure PSI	Radius ft	Flow GPM	Precip in/hr	
				■	▲
53 ● Dk. Blue	80	89	54.2	0.66	0.76
	90	90	56.7	0.67	0.78
	100	92	59.2	0.67	0.78
	110	93	61.7	0.69	0.79
63 ● Black	120	94	64.2	0.70	0.81
	80	92	63.2	0.72	0.83
	90	94	65.9	0.72	0.83
	100	96	69.4	0.72	0.84
73 ● Orange	110	97	72.0	0.74	0.85
	120	98	74.9	0.75	0.87
	80	96	72.1	0.75	0.87
	90	98	75.0	0.75	0.87
Orange	100	99	77.8	0.76	0.88
	110	102	80.5	0.74	0.86
	120	103	83.3	0.76	0.87

G-995 NOZZLE PERFORMANCE DATA*					
Nozzle	Pressure PSI	Radius ft	Flow GPM	Precip in/hr	
				■	▲
53 ● Dk. Blue	80	81	54.9	0.81	0.93
	90	84	57.2	0.78	0.90
	100	86	59.5	0.77	0.89
	110	87	62.1	0.79	0.91
63 ● Black	120	88	64.4	0.80	0.92
	80	86	62.3	0.81	0.94
	90	88	65.5	0.81	0.94
	100	90	69.0	0.82	0.95
73 ● Orange	110	91	71.9	0.84	0.97
	120	92	74.7	0.85	0.98
	80	89	72.7	0.88	1.02
	90	91	75.4	0.88	1.01
Orange	100	93	78.1	0.87	1.00
	110	95	80.9	0.86	1.00
	120	97	83.8	0.86	0.99

G-900 NOZZLES



G-900 LOW-ANGLE NOZZLES**



** Low-angle nozzles reduce the radius by 15%.

* Complies to ASAE standard. All precipitation rates calculated for 360° operation. All triangular rates are equilateral.



Contour Back-Nozzle Capabilities
Choose any nozzle from the I-40 and G-70 nozzle racks or from the short- and mid-range G-900 nozzles.

SWING JOINTS AND ACCESSORIES



SWING JOINTS

HSJ SWING JOINTS

ADVANCED FEATURES



Proven Products, Proven Partners

Over the last four decades, Hunter has become the leading producer of gear-driven rotors, known worldwide for its quality product and excellent customer support. Similarly, LASCO has spent the last 50 years developing a reputation as the industry's leading producer of PVC irrigation fittings and swing joints, providing outstanding customer support in the golf irrigation market. When Hunter sought a partner for its Hunter-branded swing joints, the choice was immediately clear.

We are proud to offer Hunter HSJ Swing Joints by LASCO — a proven team with time-tested solutions for the golf irrigation market. HSJs are available in a multitude of inlet, outlet, size, and length configurations for every course and preference.

Upgrade Your Rotor Warranty

Include Hunter HSJ Swing Joints with your golf rotor order and qualify for a 5-year component exchange warranty. HSJ Swing Joints must be purchased from an authorized Hunter Golf Distributor to qualify.



LASCO is a trademark of LASCO Fittings Inc.

HSJ SWING JOINTS

With swivel ells on both ends, HSJ Swing Joints easily adjust sprinklers to proper height and position in any configuration.

KEY BENEFITS













- Strength, longevity, and contamination resistance
 - Prefabricated PVC design with O-Ring Seals
- Configurations to meet every installation requirement
 - Available in all popular inlet and outlet configurations
 - Choose from 8", 12", or 18" lay arm lengths
 - Single top-out or triple top-out designs

Swing Joints

- HSJ-0 = Model ¾"
- HSJ-1 = Model 1"
- HSJ-2 = Model 1¼"
- HSJ-3 = Model 1½"



SWING JOINT - SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4 + 5

1 Model	2 Inlet Type (from pipe fitting)	3 Outlet Type (to sprinkler inlet)	4 Outlet Style	5 Lay Length
HSJ-0 = ¾" commercial swing joint	3 = Male NPT 	0 = Male Acme 	2 = Single top-out 	8 = 8" lay arm [†] 
HSJ-1 = 1" heavy-duty swing joint	4 = Male Acme* 	2 = Male NPT 	4 = Triple top-out 	12 = 12" lay arm 
HSJ-2 = 1¼" heavy-duty swing joint	7 = Spigot, 4" long* 	8 = Enlarging to 1½" male Acme* A = Enlarging/reducing to 1¼" male Acme** 		18 = 18" lay arm [†] 
HSJ-3 = 1½" heavy-duty swing joint	M = Main Acme H-connection*** P = Main Acme V-connection*** 			

Example:

HSJ-3-M-0-2-12 = HSJ 1½" heavy-duty swing joint, 1½" male Acme horizontal connection to mainline tee, 1½" male Acme single top outlet, 12" lay arm length

* Not available in HSJ-0 or HSJ-3. Use "M" inlet for HSJ-3. ** Not available in HSJ-0. *** Connection reduces from 1½" Acme to swing joint size. † HSJ-0 only. ‡ Not available in HSJ-0.

ACME ADAPTER FITTINGS

Choose Hunter Acme Adapter Fittings for maximum system design flexibility.



1¼" Models

- 1¼" male Acme x 1" female NPT P/N 109325SP
- 1¼" male Acme x 1¼" female NPT P/N 474800SP
- 1¼" male Acme x 1½" female NPT P/N 104153SP



1½" Models

- 1½" male Acme x 1" female NPT P/N 475400SP
- 1½" male Acme x 1¼" female NPT P/N 475200SP
- 1½" male Acme x 1½" female NPT P/N 475000SP



Acme x Acme Models

- 1½" male Acme x 1" Acme female P/N 225300SP
- 1½" male Acme x 1¼" Acme female P/N 225400SP
- 1¼" male Acme x 1" Acme female P/N 225500SP



B2B Tee Assembly

1½" Acme threaded tee and 1½" adapter for connecting two swing joints to a single mainline connection in back-to-back installations around greens.

P/N = HSJ-305-015-3 = NPT inlet

P/N = HSJ-305-015-M = Acme inlet (shown)



Swing Joint Inlet Adapter for HDPE Service Saddle

- 1½" male Acme x 1½" 10 TPI female butress thread P/N G312015SP

ROTOR ACCESSORIES

Customize golf rotors according to course needs with these useful accessories.

HOSE SWIVEL ADAPTERS

Models

- Hose Swivel Adapter for G-900 Series (fits ¾" and 1" hose)
- Hose Swivel Adapter for G-800 Series (fits ¾" and 1" hose)

P/N G90HS100
P/N G800HS100



Hose Swivel Adapters

RUBBER COVER KITS

Models

- TTS-800 Series Low-Bounce Rubber Cover Kit
- TTS-800 Series Low-Bounce Rubber Cover Kit (Green)
- TTS-800 Series No-Bounce Turf Cup Kit
- G-990 Series Rubber Cover Kit (date codes 06/11 and prior only)
- G-995 Series Rubber Cover Kit (also G990 date codes 07/11 and after)

P/N 987200SP
P/N 987201SP
P/N 987100SP
P/N 473800
P/N 473900



Rubber Cover Kit

SPOTSHOT HOSE-END NOZZLES

Models

- ¾" hose thread inlet - P/N 160700SP
- 1" hose thread inlet - P/N 160705SP

Features

- Variable nozzle stream choices:
 - Jet-Stream Nozzle: Tightly focused stream for power washing
 - Soak-Stream Nozzle: Medium stream for dust control areas
 - Fan-Stream Nozzle: Broad light stream for turf hot spots

Operating Specifications

- Flow: 35 GPM at 80 PSI*

* Not recommended for residential use with regulated, low-pressure, or low-flow conditions.



SpotShot Hose-End Nozzles

¾" P/N 160700SP
1" P/N 160705SP

Jet-Stream Nozzle



Soak-Stream Nozzle



Fan-Stream Nozzle



QUICK COUPLERS

The sturdy red brass and stainless steel construction of Quick Couplers strengthens any project.

KEY BENEFITS

- 100% interchangeable with major brands
- Red brass and stainless steel construction
- Heavy-duty thermoplastic locking and non-locking covers
- Optional winged stabilization and Acme key connection
- Stainless steel lug on 1" and 1¼" keys
- Spring-loaded covers with stainless steel springs for positive closing and protection of valve's sealing components
- Warranty period: 5 years
- See the SnapLok™ Combo Kits on [page 53](#)



Quick Couplers

QUICK COUPLER, KEY, AND HOSE SWIVEL CHARTS

Model	Inlet Threads	Slots	Body	Color*	Locking	Key	Swivels
HQ-3-RC	¾"	2	1-piece	Yellow	No	HK-33	HS-0
HQ-33-DRC	¾"	2	2-piece	Yellow	No	HK-33	HS-0
HQ-33-DLRC	¾"	2	2-piece	Yellow	Yes	HK-33	HS-0
HQ-44-RC	1" NPT	1	2-piece	Yellow	No	HK-44	HS-1 or HS-2
HQ-44-LRC	1" NPT	1	2-piece	Yellow	Yes	HK-44	HS-1 or HS-2
HQ-44-RC-AW	1" NPT	Acme	2-piece wing**	Yellow	No	HK-44A	HS-1 or HS-2
HQ-44-LRC-AW	1" NPT	Acme	2-piece wing**	Yellow	Yes	HK-44A	HS-1 or HS-2
HQ-5-RC	1" NPT	1	1-piece	Yellow	No	HK-55	HS-1 or HS-2
HQ-5-LRC	1" NPT	1	1-piece	Yellow	Yes	HK-55	HS-1 or HS-2

Notes:

* All locking cover models are available with purple covers for reclaimed water applications.

** Anti-rotation stabilization wings.



Reclaimed Water Option

All locking models have an optional purple cover for sites using reclaimed water.

QUICK COUPLER – SPECIFICATION BUILDER: ORDER 1 + 2 + 3

1 Model	2 Cover Options	3 Additional Options
<p>HQ-3 = ¾" inlet, 1-piece body, 2 slots</p> <p>HQ-5 = 1" inlet, 1-piece body, 1 slot</p> <p>HQ-33-D = ¾" inlet, 2-piece body, 2 slots</p> <p>HQ-44 = 1" inlet, 2-piece body, 1 slot or Acme key socket</p>	<p>RC = Yellow rubber cover</p> <p>LRC = Yellow locking rubber cover (Not available for HQ-3 body)</p>	<p>(blank) = No option</p> <p>AW = Acme key with anti-rotation wings (Only available for HQ-44 body)</p> <p>R = Purple locking cover (reclaimed water ID; only available for LRC models)</p>

Examples:

- HQ-3-RC = HQ-3 valve with rubber cover
- HQ-44-LRC = HQ-44 valve with locking rubber cover
- HQ-44-LRC-R = HQ-44 valve with locking rubber cover and reclaimed water ID
- HQ-44-LRC-AW-R = HQ-44 valve with locking rubber cover, Acme key socket, anti-rotation wings, and reclaimed water ID

KEYS		
Model	Compatible Valve	Compatible Swivel
HK-33 = ¾" valve, ¾" key inlet	HQ-3, HQ-33	HS-0
HK-44 = 1" valve, 1" key inlet	HQ-44	HS-1, HS-2
HK-44A = 1" valve, Acme key inlet	HQ-44-AW	HS-1, HS-2
HK-55 = 1" valve, 1¼" key inlet	HQ-5	HS-1, HS-2

HS HOSE SWIVELS	
Model	Compatible Key
HS-0 = ¾" inlet, ¾" hose outlet	HK-33
HS-1 = 1" inlet, ¾" hose outlet	HK-44, HK-44A, HK-55
HS-2 = 1" inlet, 1" hose outlet	HK-44, HK-44A, HK-55

HQ PRESSURE LOSS IN PSI				
Flow (GPM)	HQ-3	HQ-33	HQ-44	HQ-5
5	0.8	1.0		
10	1.8	2.0		
15	4.1	4.3	2.2	
20	7.2	7.6	4.4	1.0
30			11.5	3.0
40				6.3
50				9.2
60				13.0
70				19.8



SNAPLOK™ COMBO KITS

FEATURES

- Versatile, cross-compatible, and heavy-duty quick coupler
- Highly effective solution for quick coupler stabilization
- SnapLok design includes:
 - Heavy-duty PVC and brass outlet construction
 - Anti-rotation coupler locking feature
 - Accommodates both rebar and pipe stabilization

See the HSJ Swing Joints on page 50

SNAPLOK COMBO KITS		
Kit Model	Quick Coupler Model	SnapLok Model
HQ-SL-K-1-B = Locking Lid, BSP x 18" SnapLok	HQ-44-LRC	HSJ-1-6S-212
HQ-SL-K-1-RB = Locking Reclaimed Lid, BSP x 18" SnapLok	HQ-44-LRCR	HSJ-1-6S-212



SnapLok is a trademark of LASCO Fittings Inc.

TOOLS

ACCESSORIES



**Arc Adjustment/
Riser Hold-up Tool**
P/N 382800SP
G-85-B/G-885



**Valve Insertion/
Removal Tool**
P/N 604000SP
G-800 Series



**Valve Insertion/
Removal Tool**
P/N 280500SP
G-900/G-90 Series



**Valve and Snap Ring
Insertion/Removal Pliers**
P/N 475600SP
G-800 Series



Snap Ring Removal Tool
P/N 251000SP
All Golf Models



T-Handle Tool
P/N 319100SP



Hand Pump
P/N 217500SP



Pitot Gauge
P/N 280100SP



Hunter Wrench
P/N 172000SP



**Nozzle Removal/
Installation Tool**
P/N 803700SP
G-85-B, G-885 Short- and
Mid-range Nozzles



Riser Pressure Gauge
P/N 991200SP
G-80 (2019), G-85-B, and
G-885 Risers



LANDSCAPE SOLUTIONS

From clubhouse grounds and perimeters to driveways and walking paths, golf irrigation needs extend well past the course itself. Our full spectrum of industry-leading irrigation solutions will help ensure beautiful, thriving landscapes across all areas of your property.

ROTORS



ROTORS

PGP® ULTRA

The PGP Ultra raises the bar for rotor technology with powerful features developed over three decades of research, customer feedback, and lab testing.

KEY BENEFITS

- Patented automatic arc return feature resets the turret back to the original arc pattern if vandalized; adjustable arc from 50° to 360°
- Non-strippable drive mechanism is protected from damage if turned in the opposite direction of travel
- Part- and full-circle in one model for flexibility across landscapes and reduced inventory
- Headed and slotted setscrew allows radius adjustment with a Hunter Wrench or flat-blade screwdriver
- Flat-top nozzles allow fast, easy insertion
- QuickCheck™ Arc Mechanism for fast arc adjustment

OPERATING SPECIFICATIONS

- Nozzle choices: 34
- Radius: 17' to 46'
- Flow: 0.36 to 14.8 GPM
- Recommended pressure range: 25 to 70 PSI
- Operating pressure range: 20 to 100 PSI
- Precipitation rate: 0.4 in/hr approximately
- Nozzle trajectory: standard = 25°, low-angle = 13°
- Nozzle racks: 1.5 to 8.0 blue, 2.0 to 4.5 low-angle gray, 0.50 to 3.0 black, 6.0 to 13.0 green, MPR-25, MPR-30, MPR-35
- Warranty period: 5 years

FACTORY-INSTALLED OPTIONS

- Drain Check Valve (up to 10' of elevation)
- Reclaimed water ID
- Blue 1.5-4.0 nozzles

USER-INSTALLED OPTIONS

- Drain Check Valve (up to 3' of elevation) for PGP 4" / 6" only (P/N 142300SP)
- HSJ-0 prefabricated ¾" PVC Swing Joint



PGP Ultra Reclaimed

Available as a factory-installed option on all models



PGP Ultra

Easy arc and radius adjustment



PGP-00

Overall height: 7½"
Exposed diameter: 1¾"
Inlet size: ¾"



PGP-04

Overall height: 7½"
Pop-up height: 4"
Exposed diameter: 1¾"
Inlet size: ¾"



PGP-06

Overall height: 9⅞"
Pop-up height: 6"
Exposed diameter: 1¾"
Inlet size: ¾"



PGP-12

Overall height: 17"
Pop-up height: 12"
Exposed diameter: 1¾"
Inlet size: ¾"

PGP-ULTRA – SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Model	2 Standard Features	3 Feature Options	4 Nozzle Options
PGP-00 = Shrub PGP-04 = 4" pop-up PGP-06 = 6" pop-up PGP-12 = 12" pop-up	Adjustable arc, plastic riser, 8 standard nozzles, and 4 low-angle nozzles	(blank) = No option CV = Drain Check Valve CV-R = Drain Check Valve and reclaimed water ID	Blue 1.5-8.0 Gray low-angle Black short-radius Green high-flow MPR-25-Q, T, H, F MPR-30-Q, T, H, F MPR-35-Q, T, H, F 1.5 to 4.0 = Only nozzles 1.5-4.0 can be factory-installed

Examples:

PGP-04 = 4" pop-up, adjustable arc

PGP-04-2.5 = 4" pop-up, adjustable arc, and 2.5 nozzle

PGP-12-CV-R-4.0 = 12" pop-up, adjustable arc, drain check valve, reclaimed water ID, and 4.0 nozzle

I-20

The I-20 Rotor is loaded with upgraded features such as FloStop® Technology, check valves, and efficient nozzles that make it the perfect choice in a range of applications.

KEY BENEFITS

- Patented automatic arc return feature resets the turret back to the original arc pattern if vandalized; adjustable arc from 50° to 360°
- Non-strippable drive mechanism is protected from damage if turned in the opposite direction of travel
- Part- and full-circle in one model for flexibility across landscapes and reduced inventory
- Headed and slotted setscrew allows radius adjustment with a Hunter Wrench or flat-blade screwdriver
- FloStop Technology closes the flow of water from individual sprinklers to change the nozzle or perform repairs
- Flat-top nozzles allow fast, easy insertion
- QuickCheck™ Arc Mechanism for fast arc adjustment
- Available stainless steel riser for extra durability
- Drain Check Valve prevents low-head drainage (up to 10' of elevation)



I-20-00

Overall height: 7¾"
Exposed diameter: 1¾"
Inlet size: ¾"



I-20-04

Overall height: 7½"
Pop-up height: 4"
Exposed diameter: 1¾"
Inlet size: ¾"



I-20-06

Overall height: 9¾"
Pop-up height: 6"
Exposed diameter: 1¾"
Inlet size: ¾"



I-20-12

Overall height: 17"
Pop-up height: 12"
Exposed diameter: 1¾"
Inlet size: ¾"



I-20 Reclaimed

Available as a factory-installed option on all models

OPERATING SPECIFICATIONS

- Nozzle choices: 34
- Radius: 17' to 46'
- Flow: 0.36 to 14.8 GPM
- Recommended pressure range: 25 to 70 PSI
- Operating pressure range: 20 to 100 PSI
- Precipitation rate: 0.4 in/hr approximately
- Nozzle trajectory: standard = 25°, low-angle = 13°
- Nozzle racks: 1.5 to 8.0 blue, 2.0 to 4.5 low-angle gray, 0.50 to 3.0 black, 6.0 to 13.0 green, MPR-25, MPR-30, MPR-35
- Warranty period: 5 years

FACTORY-INSTALLED OPTIONS

- No drain Check Valve (NCV models)
- Reclaimed water ID
- Blue 1.5-4.0 nozzles

USER-INSTALLED OPTIONS

- HSJ-0 prefabricated ¾" PVC Swing Joint

I-20 (PLASTIC) - SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Model	2 Standard Features	3 Feature Options	4 Nozzle Options
I-20-00 = Shrub I-20-04 = 4" pop-up I-20-06 = 6" pop-up I-20-12 = 12" pop-up	Adjustable arc, plastic riser, check valve, 8 standard nozzles, and 4 low-angle nozzles	(blank) = No option NCV = Without Check Valve (only available on 4" model) R = Drain Check Valve and reclaimed water ID	Blue 1.5-8.0 Gray low-angle Black short-radius Green high-flow MPR-25-Q, T, H, F MPR-30-Q, T, H, F MPR-35-Q, T, H, F 1.5 to 4.0 = Only nozzles 1.5-4.0 can be factory-installed

I-20 (STAINLESS STEEL) - SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Model	2 Standard Features	3 Feature Options	4 Nozzle Options
I-20-04-SS = 4" pop-up I-20-06-SS = 6" pop-up	Adjustable arc, stainless steel riser, check valve, 8 standard nozzles, and 4 low-angle nozzles	(blank) = No option NCV = Without Check Valve (only available on 4" model) R = Drain Check Valve and reclaimed water ID	Blue 1.5-8.0 Gray low-angle Black short-radius Green high-flow MPR-25-Q, T, H, F MPR-30-Q, T, H, F MPR-35-Q, T, H, F 1.5 to 4.0 = Only nozzles 1.5-4.0 can be factory-installed

Example:

I-20-12-R-4.0 = 12" pop-up, adjustable arc, reclaimed water ID, and 4.0 nozzle

PGP / I-20 / PRB BLUE STANDARD NOZZLE PERFORMANCE DATA

Nozzle	Pressure PSI	Radius ft	Flow GPM	Precip in/hr	
				■	▲
1.5 ● Blue	25	29	1.2	0.27	0.32
	35	31	1.4	0.28	0.32
	45	31	1.5	0.30	0.35
	55	32	1.8	0.34	0.39
	65	32	1.9	0.36	0.41
2.0 ● Blue	25	33	1.4	0.25	0.29
	35	33	1.7	0.30	0.35
	45	34	2.0	0.33	0.38
	55	34	2.1	0.35	0.40
	65	32	2.3	0.43	0.50
2.5 ● Blue	25	33	1.7	0.30	0.35
	35	35	2.1	0.33	0.38
	45	35	2.5	0.39	0.45
	55	35	2.6	0.41	0.47
	65	35	2.9	0.46	0.53
3.0 ● Blue	25	35	2.2	0.35	0.40
	35	36	2.7	0.40	0.46
	45	38	3.0	0.40	0.46
	55	39	3.4	0.43	0.50
	65	39	3.7	0.47	0.54
4.0 ● Blue	25	37	3.0	0.42	0.49
	35	39	3.5	0.44	0.51
	45	40	4.0	0.48	0.56
	55	41	4.5	0.52	0.60
	65	41	4.8	0.55	0.63
5.0 ● Blue	25	37	3.7	0.52	0.60
	35	39	4.5	0.57	0.66
	45	42	5.0	0.55	0.63
	55	42	5.7	0.62	0.72
	65	42	6.2	0.68	0.78
6.0 ● Blue	25	38	4.3	0.57	0.66
	35	40	5.6	0.67	0.78
	45	43	6.0	0.62	0.72
	55	44	6.7	0.67	0.77
	65	44	7.3	0.73	0.84
8.0 ● Blue	25	37	6.0	0.84	0.97
	35	41	7.0	0.80	0.93
	45	44	8.0	0.80	0.92
	55	46	9.0	0.82	0.95
	65	46	9.8	0.89	1.03

PGP / I-20 / PRB GRAY LOW-ANGLE NOZZLE PERFORMANCE DATA


Nozzle	Pressure PSI	Radius ft	Flow GPM	Precip in/hr	
				■	▲
2.0 ● LA Gray	30	25	1.6	0.49	0.57
	40	27	1.9	0.50	0.58
	50	28	2.1	0.52	0.60
	60	30	2.3	0.49	0.57
	30	27	2.1	0.55	0.64
2.5 ● LA Gray	40	30	2.5	0.53	0.62
	50	33	2.8	0.49	0.57
	60	35	3.0	0.47	0.54
	30	29	2.8	0.64	0.74
	40	32	3.1	0.58	0.67
3.5 ● LA Gray	50	35	3.5	0.55	0.64
	60	37	3.8	0.53	0.62
	30	29	3.4	0.78	0.90
4.5 ● LA Gray	40	32	3.9	0.73	0.85
	50	35	4.4	0.69	0.80
	60	37	4.7	0.66	0.76

Bold = Recommended pressure

Note:

All precipitation rates calculated for 180° operation.
For the precipitation rate for a 360° sprinkler, divide by 2.

Convenient Nozzle Rack

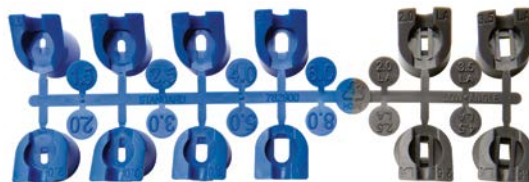

PGP / I-20 / PRB NOZZLES



Blue Standard / Gray Low-Angle (P/N 782900)

Flat-top nozzle for easy insertion coupled with a headed, slotted adjustment screw for quick radius adjustment with a Hunter Wrench or a flat-blade screwdriver.



Flat-front nozzle allows easy alignment during installation.

I-20-04 with PRB Body



Pressure Regulation

Continual operating pressure of 45 PSI



PR-075

Overall height: 2¼"
Inlet/outlet size: ¾"
For use under all models ¾" inlet sprinklers, regulates to 45 PSI

I-25

The reliable, durable, and versatile I-25 Rotor offers an expansive nozzle selection that makes it the perfect choice for large turf applications.

KEY BENEFITS

- Patented automatic arc return feature resets the turret back to the original arc pattern if vandalized; adjustable arc from 50° to 360°
- Non-strippable drive mechanism is protected from damage if turned in the opposite direction of travel
- Part- and full-circle in one model for installation flexibility and reduced inventory
- Color-coded nozzles make identification easy
- QuickCheck™ Arc Mechanism for fast arc adjustment
- Available stainless steel riser for extra durability
- Drain Check Valve prevents low-head drainage (up to 10' of elevation)



I-25-04
 Overall height: 7 7/8"
 Pop-up height: 4"
 Exposed diameter: 1 3/4"
 Inlet size: 1"

OPERATING SPECIFICATIONS

- Nozzle choices: 11
- Radius: 37' to 71'
- Flow: 3.8 to 31.5 GPM
- Recommended pressure range: 40 to 100 PSI
- Operating pressure range: 40 to 100 PSI
- Precipitation rates: 0.4 in/hr approximately
- Nozzle trajectory: standard = 25°
- Warranty period: 5 years



I-25-06
 Overall height: 10 1/4"
 Pop-up height: 6"
 Exposed diameter: 1 3/4"
 Inlet size: 1"

FACTORY-INSTALLED OPTIONS

- Reclaimed water ID
- High-speed rotations

USER-INSTALLED OPTIONS

- HSJ-1 prefabricated 1" PVC Swing Joint



I-25 Reclaimed
 Available as a factory-installed option on all models



I-25 High-Speed
 Available as a factory-installed option on stainless steel models

I-25 (PLASTIC) - SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Model	2 Standard Features	3 Feature Options	4 Nozzle Options
I-25-04 = 4" pop-up I-25-06 = 6" pop-up	Adjustable arc, plastic riser, check valve, and 5 nozzles	(blank) = No option R = Reclaimed water ID	4 to 28 = Factory-installed nozzle number

I-25 (STAINLESS STEEL) - SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Model	2 Standard Features	3 Feature Options	4 Nozzle Options
I-25-04-SS = 4" pop-up I-25-06-SS = 6" pop-up	Adjustable arc, stainless steel riser, check valve, and 5 nozzles	(blank) = No option R = Reclaimed water ID HS = High-speed HS-R = High-speed and reclaimed water ID	4 to #8 = Factory-installed nozzle number

Examples:
 I-25-04 = 4" pop-up, adjustable arc
 I-25-04-SS-R-18 = 4" pop-up, adjustable arc, stainless steel riser, reclaimed water ID, and 18 nozzle
 I-25-06-SS = 6" pop-up, adjustable arc, and stainless steel riser


I-25 STANDARD NOZZLE PERFORMANCE DATA

Nozzle	Pressure PSI	Radius ft	Flow GPM	Precip in/hr	
				■	▲
04 ● Yellow	40	40	3.8	0.46	0.53
	50	41	4.3	0.49	0.57
	60	42	4.7	0.51	0.59
	70	43	5.1	0.53	0.61
07 ● Orange*	40	45	6.6	0.63	0.72
	50	47	7.0	0.61	0.70
	60	48	7.5	0.63	0.72
08 ● Lt. Brown	40	47	7.7	0.67	0.77
	50	49	8.3	0.67	0.77
	60	50	9.2	0.71	0.82
10 ● Lt. Green*	50	51	10.1	0.75	0.86
	60	52	11.1	0.79	0.91
	70	53	12.1	0.83	0.96
	80	54	12.9	0.85	0.98
13 ● Lt. Blue	50	53	11.2	0.77	0.89
	60	54	12.3	0.81	0.94
	70	55	13.3	0.85	0.98
	80	55	14.3	0.91	1.05
15 ● Gray*	50	56	13.4	0.82	0.95
	60	57	14.3	0.85	0.98
	70	57	15.2	0.90	1.04
	80	58	16.4	0.94	1.08
18 ● Red	50	58	14.5	0.83	0.96
	60	59	15.7	0.87	1.00
	70	62	16.9	0.85	0.98
	80	63	18.2	0.88	1.02
20 ● Dk. Brown*	60	62	17.8	0.89	1.03
	70	63	19.2	0.93	1.08
	80	64	20.5	0.96	1.11
	90	65	21.8	0.99	1.15
23 ● Dk. Green	60	64	21.9	1.03	1.19
	70	65	23.6	1.08	1.24
	80	66	25.6	1.13	1.31
	90	67	27.0	1.16	1.34
25 ● Dk. Blue*	60	66	23.5	1.04	1.20
	70	68	25.5	1.06	1.23
	80	69	28.0	1.13	1.31
	90	70	29.5	1.16	1.34
28 ● Black	70	68	26.9	1.12	1.29
	80	70	28.7	1.13	1.30
	90	71	30.6	1.17	1.35
	100	71	31.5	1.20	1.39

I-25 HIGH-SPEED NOZZLE PERFORMANCE DATA

Nozzle	Pressure PSI	Radius ft	Flow GPM	Precip in/hr	
				■	▲
04 ● Yellow	40	37	3.8	0.53	0.62
	50	38	4.3	0.57	0.66
	60	38	4.7	0.63	0.72
	70	39	5.1	0.65	0.75
07 ● Orange*	40	40	6.6	0.79	0.92
	50	41	7.0	0.80	0.93
	60	42	7.5	0.82	0.95
	70	44	7.9	0.79	0.91
08 ● Lt. Brown	40	42	7.7	0.84	0.97
	50	43	8.3	0.86	1.00
	60	44	9.2	0.91	1.06
	70	45	9.9	0.94	1.09
10 ● Lt. Green*	50	46	10.1	0.92	1.06
	60	48	11.1	0.93	1.07
	70	49	12.1	0.97	1.12
	80	50	12.9	0.99	1.15
13 ● Lt. Blue	50	48	11.2	0.94	1.08
	60	49	12.3	0.99	1.14
	70	51	13.3	0.98	1.14
	80	51	14.3	1.06	1.22
15 ● Gray*	50	49	13.4	1.07	1.24
	60	51	14.3	1.06	1.22
	70	53	15.2	1.04	1.20
	80	54	16.4	1.08	1.25
18 ● Red	50	50	14.5	1.12	1.29
	60	53	15.7	1.08	1.24
	70	55	16.9	1.08	1.24
	80	57	18.2	1.08	1.25
20 ● Dk. Brown*	60	53	17.8	1.22	1.41
	70	56	19.2	1.18	1.36
	80	58	20.5	1.17	1.35
	90	59	21.8	1.21	1.39
23 ● Dk. Green	60	56	21.9	1.34	1.55
	70	58	23.6	1.35	1.56
	80	60	25.6	1.37	1.58
	90	61	27.0	1.40	1.61
25 ● Dk. Blue*	60	58	23.5	1.34	1.55
	70	62	25.5	1.28	1.47
	80	64	28.0	1.32	1.52
	90	66	29.5	1.30	1.51
28 ● Black	70	60	26.9	1.44	1.66
	80	62	28.7	1.44	1.66
	90	65	30.6	1.39	1.61
	100	67	31.5	1.35	1.56

I-25 NOZZLE



ROTORS

* Five standard nozzles included with each sprinkler.
Note:
 All precipitation rates calculated for 180° operation. For the precipitation rate for a 360° sprinkler, divide by 2.

MP ROTATOR[®] NOZZLES



MP ROTATOR

MP ROTATOR NOZZLES

The MP Rotator Nozzle is the most trusted high-efficiency solution on the market, offering up to 30% water savings over traditional spray nozzles.

0.4
in/hr

KEY BENEFITS

- Low precipitation rate of approximately 0.4 in/hr — lowest in the industry
- Automatic matched precipitation for simplified irrigation design and flexibility
- Double-pop feature protects the nozzle from external debris
- High distribution uniformity for a healthy landscape with maximum water efficiency

ADDITIONAL FEATURES

- Wind-resistant, multi-stream technology prevents misting
- For vandal resistance, the arc is adjustable only when the MP Rotator is running
- Removable filter screen prevents nozzle from clogging
- Color-coded for easy identification

OPERATING SPECIFICATIONS

- Radius reduction up to approximately 25% on all models
- Recommended operating pressure: 40 PSI
- Minimum radius setting achieved at 30 PSI
- Warranty period: 3 years

OPTIONS

- Pair with Pro-Spray® PRS40 Sprinkler Body for pressure regulation to 40 PSI for nominal radius settings
- Pair with Pro-Spray PRS30 Sprinkler Body for pressure regulation to 30 PSI for minimum radius settings

MP ROTATOR – SPECIFICATION BUILDER: ORDER 1 + 2

1 Model	2 Options
MP1000-90 = 8' to 15' radius, adjustable from 90° to 210°	(blank) = No option HT = Male threaded version <i>(Not available in 3500 and 1000-210)</i>
MP1000-210 = 8' to 15' radius, adjustable from 210° to 270°	
MP1000-360 = 8' to 15' radius, 360°	
MP2000-90 = 13' to 21' radius, adjustable from 90° to 210°	
MP2000-210 = 13' to 21' radius, adjustable from 210° to 270°	
MP2000-360 = 13' to 21' radius, 360°	
MP3000-90 = 22' to 30' radius, adjustable from 90° to 210°	
MP3000-210 = 22' to 30' radius, adjustable from 210° to 270°	
MP3000-360 = 22' to 30' radius, 360°	
MP3500-90 = 31' to 35' radius, adjustable from 90° to 210°	
MPLCS-515 = Left corner strip, 5' x 15'	
MPRCS-515 = Right corner strip, 5' x 15'	
MPSS-530 = Side strip, 5' x 30'	
MP-CORNER = 8' to 15' radius, adjustable from 45° to 105°	

MP1000: 8' to 15' radius



MP1000-90
90° to 210°



MP1000-210
210° to 270°



MP1000-360
360°

MP2000: 13' to 21' radius



MP2000-90
90° to 210°



MP2000-210
210° to 270°



MP2000-360
360°

MP3000: 22' to 30' radius



MP3000-90
90° to 210°



MP3000-210
210° to 270°



MP3000-360
360°





MP3500: 31' to 35' radius



MP3500-90
90° to 210°

MP ROTATOR

MP ROTATOR PERFORMANCE DATA

Arc	Pressure PSI	MP1000					MP2000					MP3000				
		Radius ft	Flow GPM	Flow GPH	Precip in/hr ■ ▲		Radius ft	Flow GPM	Flow GPH	Precip in/hr ■ ▲		Radius ft	Flow GPM	Flow GPH	Precip in/hr ■ ▲	
90° 	25	--	--	--	--	--	17	0.34	20.4	0.45	0.52	25	0.71	42.6	0.44	0.51
	30	12	0.17	10.2	0.45	0.52	18	0.38	22.8	0.45	0.52	27	0.76	45.6	0.40	0.46
	35	13	0.19	11.4	0.43	0.50	19	0.40	24.0	0.43	0.49	28	0.82	49.2	0.40	0.46
	40	14	0.21	12.6	0.41	0.48	20	0.43	25.8	0.41	0.48	30	0.86	51.6	0.37	0.42
	45	14	0.23	13.8	0.45	0.52	21	0.46	27.6	0.40	0.46	30	0.90	54.0	0.39	0.44
	50	15	0.25	15.0	0.43	0.49	21	0.47	28.2	0.41	0.47	30	0.95	57.0	0.41	0.47
180° 	25	--	--	--	--	--	16	0.6	36.0	0.45	0.52	25	1.44	86.4	0.44	0.51
	30	12	0.34	20.4	0.45	0.52	17	0.64	38.4	0.43	0.49	27	1.58	94.8	0.42	0.48
	35	13	0.38	22.8	0.43	0.50	18	0.71	42.6	0.42	0.49	28	1.70	102.0	0.42	0.48
	40	14	0.42	25.2	0.41	0.48	19	0.77	46.2	0.41	0.47	30	1.82	109.2	0.39	0.45
	45	14	0.44	26.4	0.43	0.50	20	0.85	51.0	0.41	0.47	30	1.93	115.8	0.41	0.48
	50	15	0.50	30.0	0.43	0.49	21	0.91	54.6	0.40	0.46	30	2.04	122.4	0.44	0.50
210° 	25	--	--	--	--	--	16	0.72	43.2	0.46	0.54	25	1.68	100.8	0.44	0.51
	30	12	0.40	24.0	0.46	0.53	17	0.75	45.0	0.43	0.49	27	1.84	110.4	0.42	0.48
	35	13	0.45	27.0	0.44	0.51	18	0.81	48.6	0.41	0.48	28	1.99	119.4	0.42	0.48
	40	14	0.49	29.4	0.41	0.48	19	0.86	51.6	0.39	0.45	30	2.12	127.2	0.39	0.45
	45	14	0.51	30.6	0.43	0.50	20	0.91	54.6	0.38	0.43	30	2.25	135.0	0.41	0.48
	50	15	0.57	34.2	0.42	0.48	21	0.98	58.8	0.37	0.42	30	2.37	142.2	0.43	0.50
270° 	25	--	--	--	--	--	16	0.87	52.2	0.44	0.50	25	2.19	131.4	0.45	0.52
	30	12	0.48	28.8	0.43	0.49	17	0.95	57.0	0.42	0.49	27	2.37	142.2	0.42	0.48
	35	13	0.53	31.8	0.40	0.46	18	1.03	61.8	0.41	0.47	28	2.55	153.0	0.42	0.48
	40	14	0.63	37.8	0.41	0.48	19	1.10	66.0	0.39	0.45	30	2.73	163.8	0.39	0.45
	45	14	0.67	40.2	0.44	0.51	20	1.17	70.2	0.38	0.43	30	2.89	173.4	0.41	0.48
	50	15	0.72	43.2	0.41	0.47	21	1.23	73.8	0.36	0.41	30	3.06	183.6	0.44	0.50
360° 	25	--	--	--	--	--	16	1.20	72.0	0.45	0.52	25	2.88	172.8	0.44	0.51
	30	12	0.69	41.4	0.46	0.53	17	1.28	76.8	0.43	0.49	27	3.15	189.0	0.42	0.48
	35	13	0.77	46.2	0.44	0.51	18	1.37	82.2	0.41	0.47	28	3.40	204.0	0.42	0.48
	40	14	0.84	50.4	0.41	0.48	19	1.48	88.8	0.39	0.46	30	3.64	218.4	0.39	0.45
	45	14	0.88	52.8	0.43	0.50	20	1.57	94.2	0.38	0.44	30	3.86	231.6	0.41	0.48
	50	15	0.98	58.8	0.42	0.48	21	1.68	100.8	0.37	0.42	30	4.07	244.2	0.44	0.50
55	15	1.01	60.6	0.43	0.50	21	1.74	104.4	0.38	0.44	30	4.27	256.2	0.46	0.53	

Bold = Optimal pressure for the MP Rotator Nozzle is 40 PSI. This can easily be achieved by using the MP Rotator Nozzle with the Hunter Pro-Spray PRS40 pressure-regulated at 40 PSI.

Works Best with Pro-Spray PRS40






Compatible with:



Pro-Spray PRS40
Page 68

MP ROTATOR PERFORMANCE DATA

MP Corner
Radius: 8' to 15'
Adjustable Arc
● Turquoise: 45° to 105°

Arc	Pressure PSI	Radius ft	Flow GPM	Flow GPH
45° 	25	--	--	--
	30	12	0.17	10.2
	35	13	0.18	10.8
	40	14	0.19	11.4
	45	14	0.21	12.6
	50	14	0.22	13.2
	55	15	0.23	13.8
90° 	25	11	0.31	18.6
	30	12	0.34	20.4
	35	13	0.36	21.6
	40	14	0.39	23.4
	45	14	0.41	24.6
	50	15	0.43	25.8
	55	15	0.46	27.6
105° 	25	11	0.36	21.6
	30	12	0.39	23.4
	35	13	0.42	25.2
	40	14	0.45	27.0
	45	14	0.48	28.8
	50	15	0.51	30.6
	55	15	0.53	31.8

Bold = Recommended pressure

MP Corner



MP-CORNER
Corner
8' to 15'

Male Threaded



MP-HT
Male Threaded

MP Accessories



MPTOOL
Adjusts all MP Rotator
Nozzles






MPSTICK
Snaps onto any length of
1" PVC to allow standing
adjustment. *PVC pipe not
included.*

MP ROTATOR

MP ROTATOR PERFORMANCE DATA

● **MPLCS-515**: Ivory, MP Left Corner Strip
● **MPRCS-515**: Copper, MP Right Corner Strip
● **MPSS-530**: Brown, MP Side Strip

	Pressure PSI	Radius ft	Flow GPM	Flow GPH
MP Left Corner Strip 	30	4 x 14	0.19	11.4
	35	5 x 15	0.21	12.6
	40	5 x 15	0.22	13.2
	45	5 x 15	0.23	13.8
	50	6 x 16	0.25	15.0
MP Right Corner Strip 	30	4 x 14	0.19	11.4
	35	5 x 15	0.21	12.6
	40	5 x 15	0.22	13.2
	45	5 x 15	0.23	13.8
	50	6 x 16	0.25	15.0
MP Side Strip 	30	4 x 28	0.38	22.8
	35	5 x 30	0.41	24.6
	40	5 x 30	0.44	26.4
	45	5 x 30	0.47	28.2
	50	6 x 32	0.49	29.4
	55	6 x 32	0.51	30.6

MP Strips



MPLCS-515
Left Corner Strip
5' x 15'



MPRCS-515
Right Corner Strip
5' x 15'



MPSS-530
Side Strip
5' x 30'



Notes:

To match the precipitation rate of standard MP Rotator models, use single-row or triangular spacing. To match the MP800, use rectangular spacing.

See **page 80** for precipitation rate calculation.

MP ROTATOR® 800 NOZZLES

0.8
in/hr

The MP800 offers a higher precipitation rate perfect for small spaces and spray retrofits.

KEY BENEFITS

- Precipitation rate of approximately 0.8 in/hr for spray retrofit applications
- Automatic matched precipitation for simplified irrigation design and flexibility
- Double-pop feature protects the nozzle from external debris
- High distribution uniformity for a healthy landscape with maximum water efficiency

ADDITIONAL FEATURES

- Wind-resistant, multi-stream technology prevents misting
- For vandal resistance, the arc is adjustable only when the MP Rotator is running
- Removable filter screen prevents nozzle clogging
- Color-coded for easy identification

OPERATING SPECIFICATIONS

- Radius reduction up to approximately 25% on all models
- Recommended operating pressure: 40 PSI
- Minimum radius setting achieved at 30 PSI
- Recommend filtering when used for dirty water applications
- Warranty period: 3 years

OPTIONS

- Specify pop-up Pro-Spray® PRS40 Sprinkler Body for pressure regulation to 40 PSI for nominal radius settings
- Pair with Pro-Spray PRS30 Sprinkler Body for pressure regulation to 30 PSI for minimum radius settings

MP800SR: 6' to 12' radius



MP800SR-90
90° to 210°

MP800SR-360
360°

MP815: 8' to 16' radius



MP815-90
90° to 210°

MP815-210
210° to 270°

MP815-360
360°

Compatible with:



Pro-Spray PRS40
Page 68

MP800SR-90



MP815-90



MP ROTATOR PERFORMANCE DATA





MP800SR

Radius: 6' to 12'

Adjustable Arc and Full-Circle

● Orange and Gray: 90° to 210°

● Lime Green and Gray: 360°

MAX RADIUS					MIN RADIUS			
Arc	Pressure PSI	Radius ft	Flow GPM GPH	Precip in/hr ■ ▲		Radius ft	Flow GPM	
90° 	30	8	0.17 9.6	0.90	1.04	6	0.13	
	35	9	0.21 11.4	0.89	1.03	7	0.15	
	40	10	0.23 13.8	0.83	0.96	8	0.16	
	45	11	0.25 15.0	0.80	0.92	8	0.18	
	50	11	0.27 16.2	0.79	0.92	9	0.19	
55	12	0.28 16.8	0.80	0.93	10	0.20		
180° 	30	8	0.33 19.2	0.88	1.02	6	0.26	
	35	9	0.38 22.2	0.85	0.99	7	0.29	
	40	10	0.42 25.2	0.81	0.93	8	0.32	
	45	11	0.46 27.6	0.77	0.88	8	0.36	
	50	11	0.48 28.8	0.76	0.88	9	0.38	
55	12	0.50 30.0	0.73	0.84	10	0.40		
210° 	30	8	0.35 22.2	0.80	0.93	6	0.30	
	35	9	0.38 26.4	0.77	0.89	7	0.34	
	40	10	0.43 29.4	0.81	0.91	8	0.37	
	45	10	0.45 31.8	0.82	0.95	8	0.42	
	50	11	0.49 33.6	0.73	0.85	9	0.44	
55	12	0.56 34.8	0.70	0.81	10	0.47		
360° 	30	8	0.66 37.8	0.89	1.03	6	0.47	
	35	9	0.71 42.0	0.80	0.92	7	0.52	
	40	10	0.78 46.8	0.79	0.91	8	0.56	
	45	10	0.85 51.0	0.78	0.90	8	0.59	
	50	11	0.88 52.8	0.73	0.85	9	0.63	
55	12	0.98 58.8	0.70	0.81	10	0.70		

MP ROTATOR PERFORMANCE DATA

MP815






Radius: 8' to 16'

Adjustable Arc and Full-Circle

● Maroon and Gray: 90° to 210°

● Lt. Blue and Gray: 210° to 270°

● Olive and Gray: 360°

Arc	Pressure PSI	Radius ft	Flow GPM GPH	Precip in/hr ■ ▲	
90° 	30	14	0.42 25.2	0.83	0.95
	35	15	0.46 27.6	0.79	0.91
	40	15	0.49 29.4	0.84	0.97
	45	16	0.52 31.2	0.78	0.90
	50	16	0.55 33.0	0.83	0.96
55	16	0.58 34.8	0.87	1.01	
180° 	30	13	0.75 45.0	0.85	0.99
	35	14	0.86 51.6	0.84	0.98
	40	15	0.93 55.8	0.80	0.92
	45	15	0.96 57.6	0.82	0.95
	50	16	1.06 63.6	0.80	0.92
55	16	1.11 66.6	0.83	0.96	
210° 	30	13	0.88 52.8	0.86	0.99
	35	14	0.96 57.6	0.81	0.93
	40	15	1.10 66.0	0.81	0.93
	45	15	1.16 69.6	0.85	0.98
	50	16	1.24 74.4	0.80	0.92
55	16	1.30 78.0	0.84	0.97	
270° 	30	13	1.14 68.4	0.87	1.00
	35	14	1.24 74.4	0.81	0.94
	40	15	1.40 84.0	0.80	0.92
	45	15	1.47 88.2	0.84	0.97
	50	16	1.54 92.4	0.77	0.89
55	16	1.61 96.6	0.81	0.93	
360° 	30	13	1.52 91.2	0.87	1.00
	35	14	1.70 102.0	0.83	0.96
	40	15	1.87 112.2	0.80	0.92
	45	15	2.00 120.0	0.86	0.99
	50	16	2.13 127.8	0.80	0.92
55	16	2.26 135.6	0.85	0.98	

Bold = Optimal pressure for the MP Rotator Nozzle is 40 PSI. This can easily be achieved by using the MP Rotator with the Pro-Spray PRS40 Sprinkler Body, pressure-regulated at 40 PSI

PRO-SPRAY® PRS40

To optimize MP Rotator Nozzle performance, the Pro-Spray PRS40 Sprinkler Body is pressure-regulated to 40 PSI.

KEY BENEFITS

- Industry's strongest spray body for years of reliable performance
- Pressure-regulated to 40 PSI for the MP Rotator Nozzle
- Gray cap for easy field identification
- Co-molded wiper seal made from chemical- and chlorine-resistant materials
- Innovative seal design prevents cap-to-body leaks, even with a loose cap
- FloGuard™ Technology option eliminates water waste in the event of a missing nozzle

ADDITIONAL FEATURES

- Directional flush plug design for cleaner installation
- Interchangeable components for easier servicing, retrofits, and upgrades
- Heavy-duty spring for consistent riser retraction
- Check valve option eliminates low-head drainage

OPERATING SPECIFICATIONS

- Operational pressure range: 15 to 100 PSI
- Warranty period: 5 years

FACTORY-INSTALLED OPTIONS

- Check valve available for 4", 6", and 12" models (up to 14' of elevation)
- Reclaimed water identification
- FloGuard Technology available for pop-up models

USER-INSTALLED OPTIONS

- Check valve (up to 14' of elevation; P/N 437400SP)
- Reclaimed water ID cap (P/N 458562SP)
- Snap-on reclaimed cover (P/N PROS-RC-CAP-SP)
- Shutoff cap (P/N 213600SP)
- Shutoff nozzle (P/N 916400SP)



PRS40 Reclaimed

PRS40 models include optional factory-installed purple reclaimed caps



PROS-00-PRS40
Retracted height: 4½"
Inlet size: ½"



PROS-04-PRS40-CV
Retracted height: 5⅞"
Pop-up height: 4"
Exposed diameter: 2¼"
Inlet size: ½"



FloGuard Technology



PROS-06-PRS40-CV
Retracted height: 8¾"
Pop-up height: 6"
Exposed diameter: 2¼"
Inlet size: ½"



PROS-12-PRS40-CV
Retracted height: 16⅞"
Pop-up height: 12"
Exposed diameter: 2¼"
Inlet size: ½"

PRO-SPRAY PRS40 - SPECIFICATION BUILDER: ORDER 1 + 2 + 3

1 Model	2 Feature Options	3 Specialty Options
PROS-00-PRS40 = 40 PSI regulated shrub adapter PROS-04-PRS40 = 40 PSI regulated 4" pop-up PROS-06-PRS40 = 40 PSI regulated 6" pop-up PROS-12-PRS40 = 40 PSI regulated 12" pop-up	(blank) = No option CV = Factory-installed drain check valve (Pop-up models only)	(blank) = No option R = Factory-installed reclaimed body cap F = FloGuard Technology F-R = FloGuard Technology with reclaimed body cap

PRO-SPRAY PRS40 (SIDE INLET) MODELS

Model

PROS-06-SI-PRS40 = 40 PSI regulated 6" pop-up with side inlet

PROS-12-SI-PRS40 = 40 PSI regulated 12" pop-up with side inlet

Examples:

PROS-06-SI-PRS40 = 6" pop-up with side inlet regulated at 40 PSI

PROS-06-PRS40-CV = 6" pop-up regulated at 40 PSI, drain check valve

PROS-12-PRS40-CV-F-R = 12" pop-up regulated at 40 PSI, drain check valve, and FloGuard Technology with reclaimed body cap




Compatible with:



MP Rotator Nozzles
Pages 63 to 66

MP ROTATOR

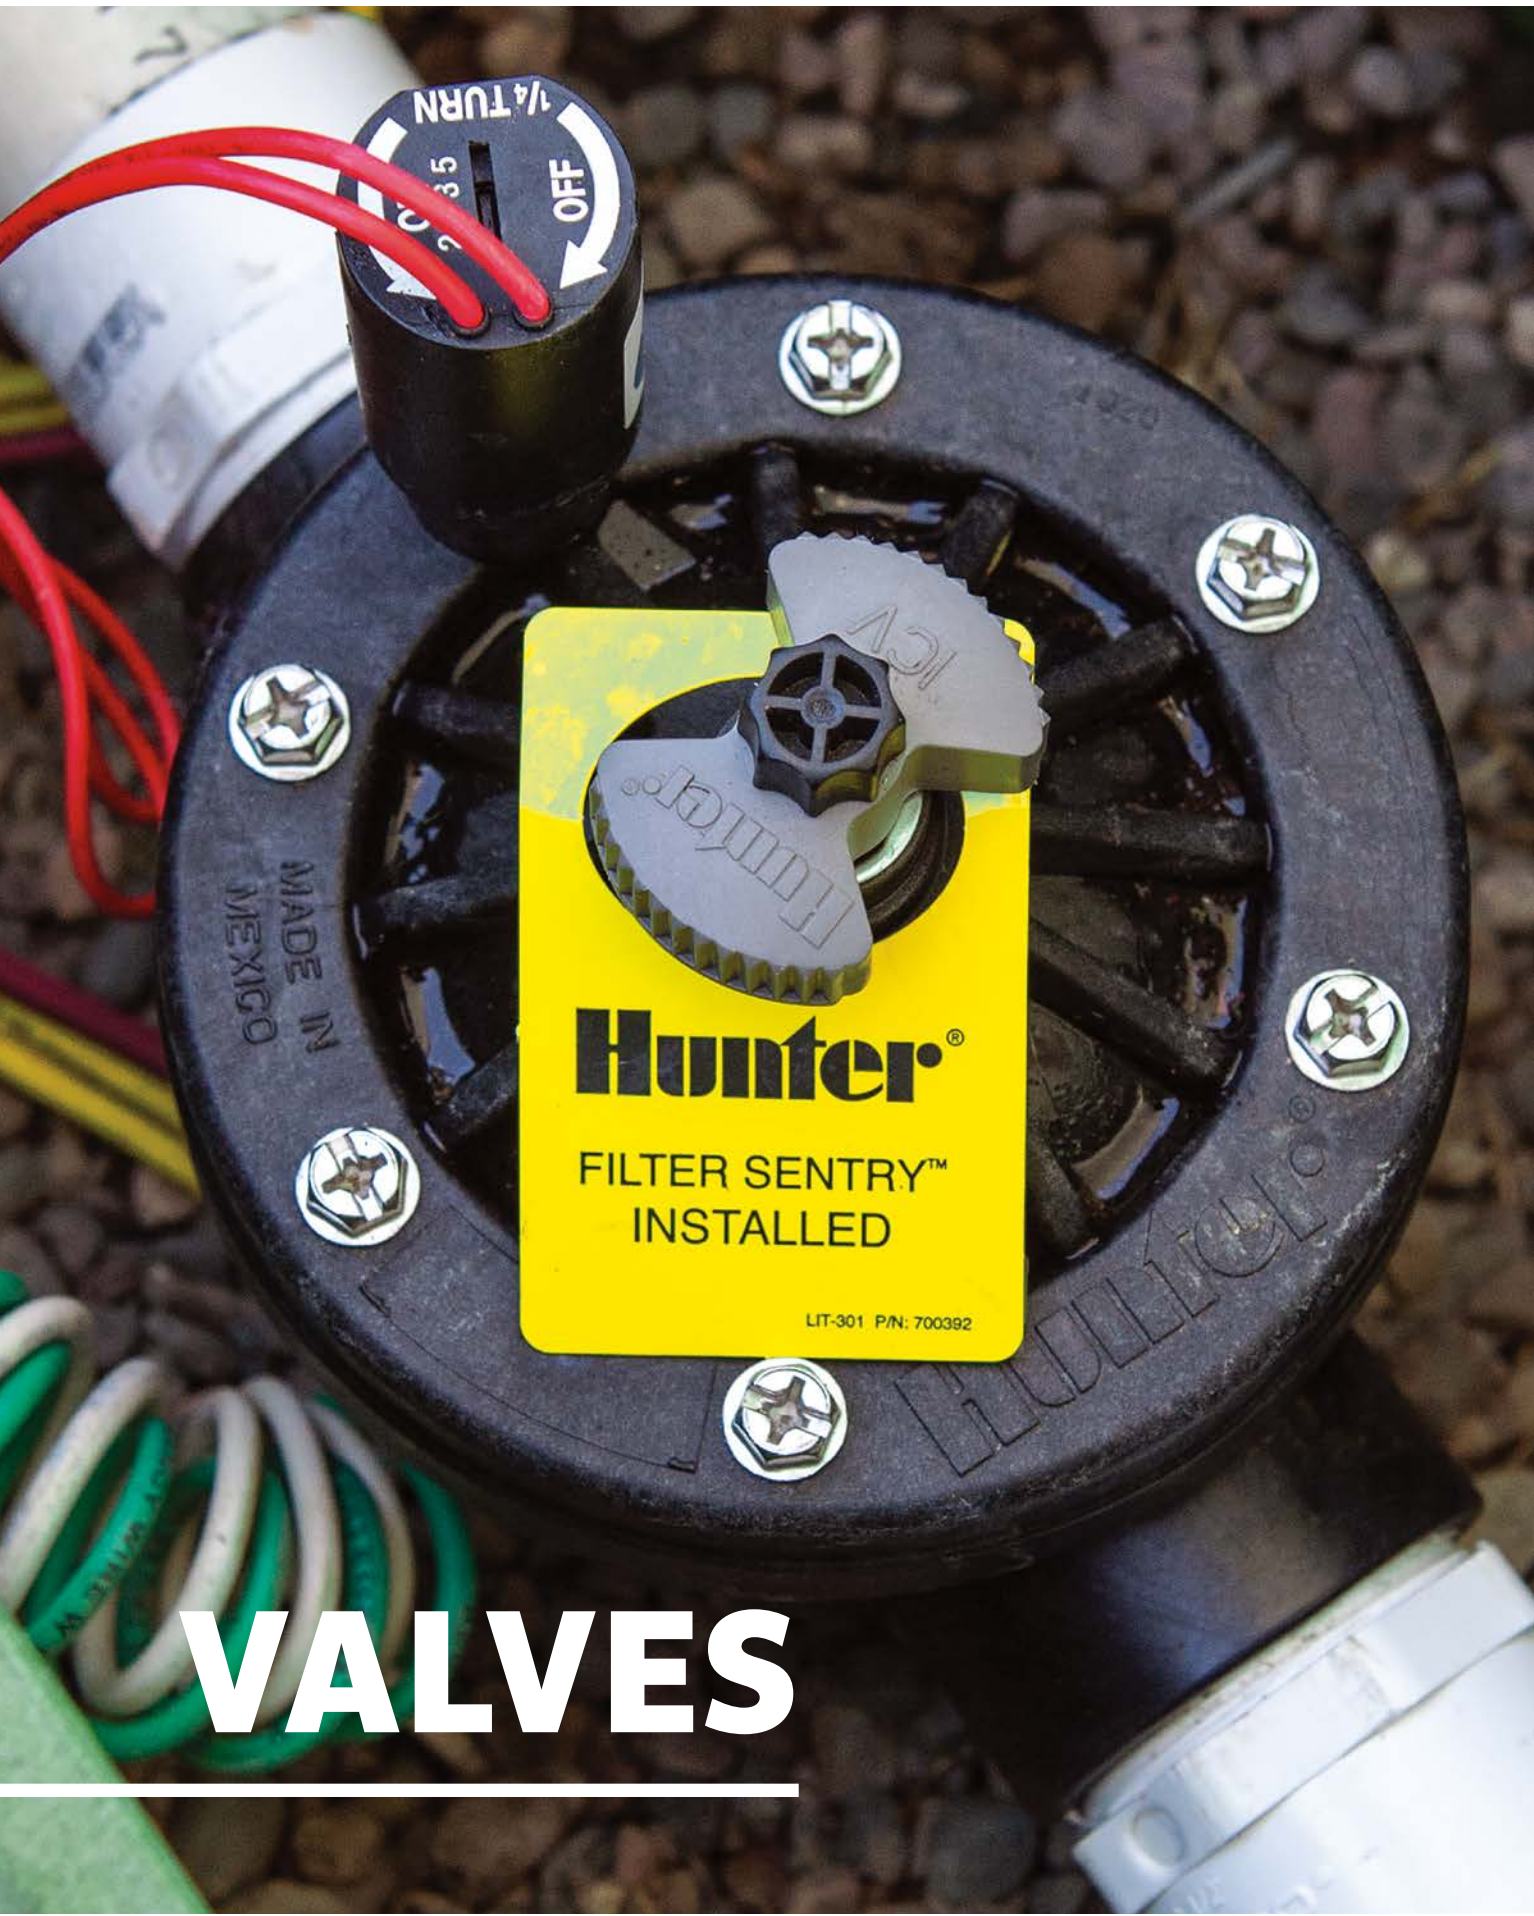

VALVES

VALVE COMPARISON CHART

QUICK SPECS		1" PGV & JAR-TOP	PGV	ICV	ICV FILTER SENTRY	IBV
SIZE		1"	1½", 2"	1", 1½", 2", 3"	1", 1½", 2", 3"	1", 1½", 2", 3"
FLOW	GPM	0.2 to 40	20 to 150	0.1 to 300	0.1 to 300	0.1 to 300
FEATURES						
CAPTIVE BONNET BOLTS		●	●	●	●	
EPDM DIAPHRAGM AND SEAT				Standard	Standard	Standard
WARRANTY		2 Years	2 Years	5 Years	5 Years	5 Years
ADVANCED FEATURES						
FLOW CONTROL		Optional	●	●	●	●
FILTER SENTRY® MECHANISM				User-Installed	Factory-Installed	Factory-Installed
ACCU SYNC® CAPABLE		●	●	●	●	●
RECLAIMED WATER ID HANDLE		User-Installed	User-Installed	User-Installed	User-Installed	
RECLAIMED WATER ID TAG				User-Installed	User-Installed	User-Installed
APPLICATIONS						
RESIDENTIAL		●	●	●		
COMMERCIAL			●	●	●	●
POTABLE WATER		●	●	●	●	●
RECLAIMED WATER				●	●	●
SECONDARY WATER					●	●
PRESSURE REGULATION		●	●	●	●	●
HIGH-PRESSURE SYSTEMS				●	●	●
LOW-PRESSURE SYSTEMS		●	●	●	●	●
HIGH-TEMPERATURE LOCATIONS				●	●	●
USE AS MASTER VALVE			●	●	●	●

Advanced Features



ACCU SYNC PRESSURE REGULATORS

Available on:
PGV, ICV, IBV

Avoid sprinkler overpressure conditions and gain significant water savings with Hunter's Accu Sync Pressure Regulator. This option is available in adjustable or fixed pressure models.



FILTER SENTRY MECHANISM

For use with:
ICV, IBV

The Filter Sentry Mechanism scours the filter clean twice during each valve cycle. Since it is attached to the diaphragm, the Filter Sentry feature can be easily added after a valve has been installed.



All Hunter valves are 100% water-tested to ensure reliable operation once installed. From residential to commercial

applications, high pressure to low pressure, and clean water to dirty water, Hunter valves keep systems running flawlessly day in and day out.

This dependable valve works seamlessly with highly demanding systems.

KEY BENEFITS

- Optional Filter Sentry® Mechanism scours the filter screen in dirty water conditions
- External/internal manual bleed allows for quick and easy activation at the valve
- Glass-filled nylon construction provides high-pressure rating and reliability
- Double-beaded diaphragm seal design ensures leak-free performance
- Fabric-reinforced EPDM diaphragm and seat ensure greater performance in all water conditions
- Captive bonnet screws eliminate the possibility of lost parts during disassembly
- Triple-tool bonnet screws are compatible with standard or Phillips screwdrivers as well as a nut driver
- Encapsulated solenoid with captive plunger used on every Hunter valve provides hassle-free service
- Flow control maximizes efficiency and prolongs the life of the system

USER-INSTALLED OPTIONS

- Accu Sync® Pressure Regulator at the valve
- DC-Latching Solenoid for battery-operated controllers (P/N 458200)
- Filter Sentry® Mechanism easily added to an installed valve*
- Solenoid conduit cover (P/N 464322)

FACTORY-INSTALLED OPTIONS

- LS: Valve without solenoid
- DC: DC-Latching Solenoid for battery-operated controllers
- FS: Filter Sentry Mechanism
- FS-R: Reclaimed option with Filter Sentry Mechanism, purple control knob, and purple chlorine-resistant diaphragm

OPERATING SPECIFICATIONS

- Flow:
 - ICV-101G: 0.1 to 40 GPM
 - ICV-151G: 0.1 to 150 GPM
 - ICV-201G: 0.1 to 200 GPM
 - ICV-301: 0.1 to 300 GPM
- Recommended pressure range: 20 to 220 PSI
- Temperature rating: 150°F
- Warranty period: 5 years

SOLENOID SPECIFICATIONS

- 24 VAC solenoid
 - 350 mA inrush, 190 mA holding, 60 Hz
 - 370 mA inrush, 210 mA holding, 50 Hz



ICV-101G
Inlet diameter: 1"
Height: 5½"
Length: 4¾"
Width: 4"



ICV-151G
Inlet diameter: 1½"
Height: 7⅞"
Length: 6⅞"
Width: 5½"



ICV-201G
Inlet diameter: 2"
Height: 7⅞"
Length: 6⅞"
Width: 5½"



ICV-301
Inlet diameter: 3"
Height: 10¾"
Length: 9"
Width: 7⅞"



ICV-R
Inlet diameter: 1", 1½", 2", and 3"
Height: 7⅞"
Length: 6⅞"
Width: 5½"

VALVES

Double-Beaded Diaphragm

Filter Sentry Mechanism




ICV 1", 1½", 2", & 3" - SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Model	2 Standard Features	3 Feature Options	4 User Installed Options
ICV-101G = 1" ICV-151G = 1½" ICV-201G = 2" ICV-301 = 3"	Globe valve with flow control Globe / angle valve with flow control	(blank) = No option FS = Filter Sentry Mechanism FS-R = Filter Sentry Mechanism purple reclaimed diaphragm and ID tag DC = DC-Latching Solenoid for battery-operated controllers LS = Less solenoid	AS-ADJ = Adjustable Accu Sync Pressure Regulator 458200 = DC-Latching Solenoid for battery-operated controllers 561205 = Reclaimed flow control handle (1", 1½", and 2" only) LIT-700 = Reclaimed ID tag

Example:
 ICV-201G-AS-ADJ = 2" ICV globe valve with flow control and user-installed adjustable Accu Sync Pressure Regulator

ICV PRESSURE LOSS (AT OPTIMAL FLOWS) IN PSI

Flow (GPM)	1" Globe	1½" Globe	2" Globe	3" Globe	3" Angle
0.1	2.0				
0.5	2.0				
1	2.0				
5	2.5				
10	3.0				
15	3.0				
20	3.0	1.5			
30	9.0	1.5			
40	20.0	1.7	0.8		
50		2.2	1.2		
60		3.0	1.7		
75		3.9	2.4		
90		5.5	3.2		
100		7.0	4.2		
120		10.9	6.5		
135		12.7	7.9		
150		16.2	9.8	2.5	1.9
175			13.3	3.0	2.4
200			17.7	4.1	3.3
225				5.3	4.3
250				6.7	5.5
275				8.3	6.9
300				10.1	8.5

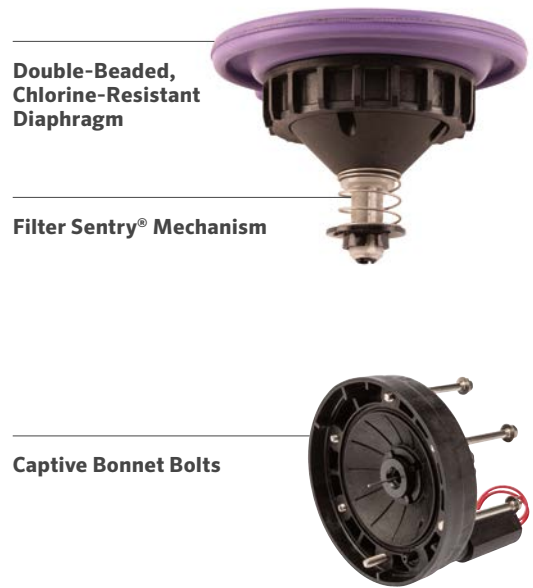


VALVES

KEY BENEFITS


- Factory-installed Filter Sentry® Mechanism scours the filter screen in dirty water conditions
- External/internal manual bleed allows for quick and easy activation at the valve
- Heavy-duty brass construction provides high-pressure rating and reliability
- Double-beaded diaphragm seal design ensures leak-free performance
- Fabric-reinforced EPDM diaphragm and seat ensure greater performance in all water conditions
- Triple-tool bonnet screws are compatible with standard or Phillips screwdrivers as well as a nut driver
- Encapsulated solenoid with captive plunger used on every Hunter valve provides hassle-free service
- Flow control maximizes efficiency and prolongs the life of the system



IBV-101G-FS
Inlet diameter: 1"
Height: 5¼"
Length: 4½"
Width: 3"



IBV-151G-FS
Inlet diameter: 1½"
Height: 6½"
Length: 6"
Width: 5¼"



IBV-201G-FS
Inlet diameter: 2"
Height: 7"
Length: 6"
Width: 5¼"



IBV-301G-FS
Inlet diameter: 3"
Height: 9"
Length: 8½"
Width: 7"

USER-INSTALLED OPTIONS

- Accu Sync® Pressure Regulator at the valve*
- DC-Latching Solenoid for battery-operated controllers (P/N 458200)
- Solenoid conduit cover (P/N 464322)

FACTORY-INSTALLED OPTIONS


- DC: DC-Latching Solenoid for battery-operated controllers

OPERATING SPECIFICATIONS

- Flow:
 - IBV-101G: 0.1 to 40 GPM
 - IBV-151G: 0.1 to 150 GPM
 - IBV-201G: 0.1 to 200 GPM
 - IBV-301G: 0.1 to 300 GPM
- Recommended pressure range: 20 to 220 PSI
- Temperature rating: 150°F
- Warranty period: 5 years

SOLENOID SPECIFICATIONS

- 24 VAC solenoid
- 350 mA inrush, 190 mA holding, 60 Hz
- 370 mA inrush, 210 mA holding, 50 Hz

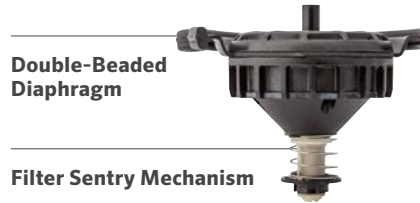

Double-Beaded Diaphragm

Filter Sentry Mechanism

IBV PRESSURE LOSS (AT OPTIMAL FLOWS) IN PSI

Flow GPM	1" Globe	1½" Globe	2" Globe	3" Globe
0.1	2.0			
0.5	2.0			
1	2.0			
5	2.5			
10	3.0			
15	3.0			
20	3.0	1.5		
30	4.0	1.5		
40	7.0	1.7	0.8	
50	2.2	1.2		
60	3.0	1.7		
75	3.9	2.4		
90	5.5	3.2		
100	7.0	4.2		
120	10.9	6.5		
135	12.7	7.9		
150	16.2	9.8	2.5	
175		13.3	3.0	
200		17.7	4.1	
225			5.3	
250			6.7	
275			8.3	
300			10.1	

Note:

Charts based on full-open flow-control position

IBV 1", 1½", 2" & 3" – SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4				
1	Model	2 Standard Features	3 Feature Options	4 User-Installed Options
	IBV-101G-FS = 1"	Brass globe valve with flow control and Filter Sentry Mechanism	(blank) = No option	AS-ADJ = Adjustable Accu Sync Pressure Regulator
	IBV-151G-FS = 1½"		R = Filter Sentry Mechanism purple reclaimed diaphragm and ID tag	458200 = DC-Latching Solenoid for battery-operated controllers
	IBV-201G-FS = 2"		DC = DC-Latching Solenoid battery-operated controllers	899605 = Reclaimed flow control handle
	IBV-301G-FS = 3"		LS = Less solenoid	LIT-700 = Reclaimed ID tag

Examples:

IBV-201G-FS-AS-ADJ = 2" IBV brass globe valve with flow control, Filter Sentry Mechanism, and user-installed adjustable Accu Sync Pressure Regulator

EXPERIENCE ALL WALKS OF LIGHT

LANDSCAPE AND ARCHITECTURAL LIGHTING

FX Luminaire provides industry-leading landscape and architectural lighting solutions with a focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities.

DESIGNER AND STANDARD SERIES FIXTURES

FX Luminaire offers a range of classic and contemporary lighting fixtures in all configurations, from up lights and down lights to path lights and specialty lights.



Our fixture classification system is based on material construction, performance, and price. This helps you quickly identify common fixtures and create lighting packages for any project or budget. All FX Luminaire fixtures are made with top-quality materials and backed by the industry's best support team.

LUXOR® CONTROLLER

With Luxor Technology, you can liven up your clubhouse, course pathways, or property entryways to complement any occasion with 30,000 colors. Design one-of-a-kind holiday displays, create ambience for weddings, add company colors for corporate events, or simply adjust hues to match vegetation as the seasons change.

With a Luxor Controller, you can also create up to 250 adjustable lighting groups that can be turned on independently and dimmed from 1-100%.

The Luxor App provides ultimate flexibility and convenience when designing with Luxor Lighting Control Systems. With the app, you can adjust fixture intensities and colors, program up to 40 calendar-based themes, and fine-tune your color palette — from anywhere!

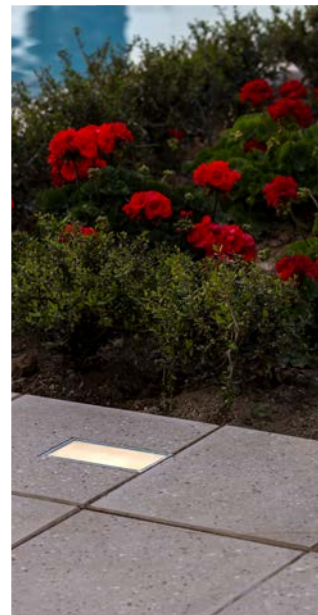



LIGHTING

FXLuminaire®

LANDSCAPE & ARCHITECTURAL LIGHTING | [Learn more. Visit fxli.com](http://www.fxli.com)

HUNTER SUPPORT NETWORK



With membership in the Hunter Support Network (HSN), you are entitled to a host of exclusive services and benefits to provide optimal central control system performance and a healthy irrigation system year-round. HSN establishes an additional layer of confidence that your irrigation system is working as expected at all times.

Whether you are setting up for an important tournament, starting a renovation, or recovering from storm damage, HSN gives you the safety net you need to ensure playable turf. As an HSN member, we stand ready to serve your needs, from remote or on-site troubleshooting and staff training to replacement equipment shipped overnight. Become a member today!

HSN MEMBERSHIP BENEFITS

- The first year of HSN membership is included with the purchase of the Pilot® Command Center Software
 - Includes uninterruptible power supply/battery backup
- Unlimited telephone support for software and hardware installed on the golf course will be provided by Hunter Technical Service, or one of our Authorized Service Providers (ASP)
- Hunter Field Service Manager (FSM) or ASP system commissioning for first-year members with new Pilot systems
 - Complete control system diagnostics
 - Computer setup and programming
 - Communications setup and testing
 - Field wiring diagnostics and benchmark report
 - Equipment grounding test
- Online Hunter Golf Forum membership
- On-site training from a Hunter FSM
- Pilot field interface next business day replacement
- Field interface communication module next business day replacement
- Loaner Pilot PC eligibility with next business day shipping
- Remote assistance/desktop sharing support
- Free Pilot standard software/firmware updates
- Members-only pricing on premium software upgrades
- Members-only pricing on Rapid Repair Kits

HUNTER SUPPORT NETWORK

Plan	Description
HSNPILOT	One-year Hunter Support Network (HSN) Membership, includes uninterruptible power supply
HSNRENEWAL	One-year membership renewal for Hunter Support Network, available for active HSN members only

Notes:

*One year of HSN membership is included with the purchase of Pilot Command Center Software. Purchase HSNRENEWAL for service in year two and beyond.

To learn more about HSN membership and Rapid Repair Kits, contact your Authorized Hunter Golf Distributor.

HUNTER RAPID REPAIR KITS

Having the right parts on hand is crucial to uninterrupted water management. With HSN membership, you receive special discounts on customized Rapid Repair Kits — an industry first. That way, you have critical parts on hand in case of an emergency, with little to no course downtime, minimum hassle, and no shipping delay. There are kits available for all Pilot® systems, including integrated Pilot Two-Way Module (TWM) and conventional controllers, plus all communication options.

RAPID REPAIR KIT COMPONENTS



PILOTFPFC
Pilot Facepack for
Conventional Field Controller



527300
Facepack to Backplane
Wiring Harness



PILOTFC010
10-Station Output Module




PILOTHWR
Hardwire Communication Module



PILOTMODUHF
Radio Communication Module



PILOTDH250EXP
Pilot TWM Hub 250-Station
Expansion Kit (Module and
Power Supply)



411600
Front Plane Kit/Midplane
Assembly



PILOTFCBP
Backplane Kit (Includes
527300 Wiring Harness)



411601
Front Plane Kit, TWM Hub
(No Harness), Midplane
Assembly, Screws



PILOTFPDH
TWM Hub Facepack

RAPID REPAIR KIT OPTIONS

HSNFC40HWRK Pilot FC 40-Station Hardwire Kit	HSNFC80HWRK Pilot FC 80-Station Hardwire Kit	HSNFC40UHFK Pilot FC 40-Station UHF Kit	HSNFC80UHFK Pilot FC 80-Station UHF Kit	HSNDHHWRK Pilot TWM Hub Hardwire Kit	HSNDHUHFK Pilot TWM Hub with UHF Radio Kit
PILOTFPFC	PILOTFPFC	PILOTFPFC	PILOTFPFC	PILOTFPDH	PILOTFPDH
527300	527300	527300	527300	527300	527300
PILOTFC010	PILOTFC010 (x2)	PILOTFC010	PILOTFC010 (x2)	PILOTDH250EXP	PILOTDH250EXP
411600	411600	411600	411600	411601	411601
PILOTHWR	PILOTHWR	PILOTMODUHF	PILOTFCBP	PILOTHWR	PILOTMODUHF
	PILOTFCBP		PILOTMODUHF		

A construction worker wearing a white hard hat, safety glasses, an orange high-visibility safety vest over a dark long-sleeved shirt, and blue jeans is using a shovel to dig in the ground. The worker is wearing black gloves and is focused on the task. The background shows green foliage and a tree trunk. The text "TECHNICAL INFORMATION" is overlaid in large white letters across the center of the image.

TECHNICAL INFORMATION



HUNTER UNIVERSITY

<https://hunter.info/hunteruniversityem>

Advance your career with our comprehensive online training programs for golf irrigation professionals. From fundamental product knowledge to advanced control systems to design techniques, there's a golf professional development program waiting for you! Learn more at training.hunterindustries.com.

Find Your Path to Success

1. Access free golf product training online at training.hunterindustries.com.
2. Choose the golf programs or courses that best fit your needs.

On-Site Expert Workshops

These interactive, instructor-led courses feature a hands-on approach to learning about irrigation. Classes are held at the Hunter Industries campus in San Marcos, California, and select locations worldwide. To learn more, contact training@hunterindustries.com.

Golf Irrigation Training Programs

Learn how to expertly manage your watering needs to ensure a healthy, playable course. Check out the golf-specific training programs below!

Pilot Command Center Software

- Pilot Command Center Introduction
- Pilot Command Center Course Irrigation Profile
- Pilot Command Center Settings
- Pilot Command Center Disable Specific Areas
- Pilot Command Center Adjust Plan for Limited Flow

Pilot Controllers

- PilotFCP Utility Demo
- Pilot Field Controller and Integrated Hub Fundamentals

Maintenance

- Golf Rotor Maintenance
- Golf Controller Maintenance
- Distribution Uniformity Audit

PRECIPITATION RATES




In this section, the “Sprinkler Spacing Method–Any Arc and Any Spacing” equation is used to calculate precipitation rates. The first set of equations with the ■ shows the precipitation rate for the sprinklers when they are laid out in a square pattern. The next set with the ▲ shows the precipitation rate for the sprinklers laid out in an equilateral triangular spacing pattern. This is the “Sprinkler Spacing Method–Equilateral Triangular Spacing” equation.

WHAT IS “PRECIPITATION RATE”?

If someone said they were caught in a rainstorm that dropped one inch of water in an hour, you would have some idea of how “hard” or “heavily” the rain came down. A rainstorm that covers an area with one inch of water in one hour has a “precipitation rate” of one inch per hour (1 in/hr or 25 mm/hr). Similarly, the precipitation rate is the “speed” at which a sprinkler or an irrigation system applies water.

MATCHED PRECIPITATION RATES

A zone or system in which all the heads have similar precipitation rates is said to have “matched precipitation rates.” Systems that have matched precipitation rates reduce wet and dry spots and minimize run times, which reduces water consumption and lowers costs. Knowing that sprinkler spacing, flow rates, and arcs of coverage affect precipitation rates, a general guideline is: as the spray arc doubles, so should the flow.

 90° Arc = 1 GPM (0.23 m ³ /hr; 3.8 l/min)	 180° Arc = 2 GPM (0.45 m ³ /hr; 7.6 l/min)	 360° Arc = 4 GPM (0.91 m ³ /hr; 15.1 l/min)
--	--	---

The flow rate of half-circle heads must be two times the flow rate of the quarter-circle heads, and the full-circle heads must have two times the flow rate of the half-circle heads. In the illustration, the same amount of water is applied to each quarter circle area and precipitation is therefore matched.

CALCULATING PRECIPITATION RATES

Depending upon the construction of the irrigation system, the precipitation rate may be calculated by either a Sprinkler Spacing or a Total Area method.

Sprinkler Spacing Method (■)

The precipitation rate should be calculated for each individual zone. If all sprinkler heads on the zone have the same spacing, flow rate, and arc of coverage, use one of the following formulas:

Any Arc and Any Spacing (■):

$$\begin{aligned} \text{P.R. (in/hr)} &= \frac{\text{Flow Rate (GPM) for any Arc} \times 34,650}{\text{Degrees of Arc} \times \text{Head Spacing (ft)} \times \text{Row Spacing (ft)}} \\ \text{P.R. (mm/hr)} &= \frac{\text{Flow Rate (m}^3\text{/hr) for any Arc} \times 360,000}{\text{Degrees of Arc} \times \text{Head Spacing (m)} \times \text{Row Spacing (m)}} \\ \text{P.R. (mm/hr)} &= \frac{\text{Flow Rate (l/min) for any Arc} \times 21,600}{\text{Degrees of Arc} \times \text{Head Spacing (m)} \times \text{Row Spacing (m)}} \end{aligned}$$

Sprinkler Spacing Method (▲)

The precipitation rate should be calculated for each individual zone. If all sprinkler heads on the zone have the same spacing, flow rate, and arc of coverage, use one of the following formulas:

Equilateral Triangular Spacing (▲):

$$\begin{aligned} \text{P.R. (in/hr)} &= \frac{\text{Flow Rate (GPM) for any Arc} \times 34,650}{\text{Degrees of Arc} \times (\text{Head Spacing})^2 \times 0.866} \\ \text{P.R. (mm/hr)} &= \frac{\text{Flow Rate (m}^3\text{/hr) for any Arc} \times 360,000}{\text{Degrees of Arc} \times (\text{Head Spacing})^2 \times 0.866} \\ \text{P.R. (mm/hr)} &= \frac{\text{Flow Rate (l/min) for any Arc} \times 21,600}{\text{Degrees of Arc} \times (\text{Head Spacing})^2 \times 0.866} \end{aligned}$$

Total Area Method

The precipitation rate for a “system” is the average precipitation rate of all sprinklers in an area, regardless of the spacing, flow rate, or arc for each head. The Total Area Method calculates all the flows of all of the heads in any given area.

$$\begin{aligned} \text{P.R. (in/hr)} &= \frac{\text{Flow (GPM)} \times 96.25}{\text{Total Area (ft}^2\text{)}} \\ \text{P.R. (mm/hr)} &= \frac{\text{Flow (m}^3\text{/hr)} \times 1,000}{\text{Total Area (m}^2\text{)}} \\ \text{P.R. (mm/hr)} &= \frac{\text{Flow (l/min)} \times 60}{\text{Total Area (m}^2\text{)}} \end{aligned}$$

CONVERSION FACTORS

CONVERSION FACTORS			
To Convert	From	To	Multiply By
Area	acres	foot ²	43560
	acres	meter ²	4046.8
	meter ²	foot ²	10.764
	foot ²	inch ²	144
	inch ²	centimeter ²	6.452
	hectares	meter ²	10000
	hectares	acres	2.471
Power	kilowatts	horsepower	1.341
Flow	foot ³ /minute	meter ³ /second	0.0004719
	foot ³ /second	meter ³ /second	0.02832
	yards ³ /minute	meter ³ /second	0.01274
	gallon/minute	meter ³ /hour	0.22716
	gallon/minute	liter/minute	3.7854
	gallon/minute	liter/second	0.06309
	meter ³ /hour	liter/minute	16.645
	meter ³ /hour	liter/second	0.2774
	liter/minute	liter/second	60
Length	foot	inch	12
	inch	centimeter	2.54
	foot	meter	0.30481
	kilometer	miles	0.6214
	miles	foot	5280
	miles	meter	1609.34
	millimeter	inch	0.03937
Pressure	PSI	kilopascals	6.89476
	PSI	bar	0.068948
	bar	kilopascals	100
	PSI	feet of head	2.31
Velocity	feet/second	meter/second	0.3048
Volume	feet ³	gallon	7.481
	feet ³	liter	28.32
	meter ³	feet ³	35.31
	meter ³	yard ³	1.3087
	yard ³	feet ³	27
	yard ³	gallon	202
	acres/feet	foot ³	43,560
	gallon	meter ³	0.003785
	gallon	liter	3.785
imperial gallon	gallon	1.833	

SYMBOLS AND CONSTANTS

SYMBOLS AND CONSTANTS			
Symbol	Description	U.S. Units	SI Units
a	Cross-sectional area of pipe flow	inches ² (in ²)	millimeters ² (mm ²)
C	Hazen-Williams roughness coefficient	none/unitless	none/unitless
Cu	Christiansen's coefficient of uniformity	percent (%)	percent (%)
d	inside diameter of pipe	inches (in)	millimeters (mm)
Dt	diameter of throw of a sprinkler	feet (ft)	meters (m)
DU	distribution uniformity	percent (%)	percent (%)
ETc	crop evapotranspiration	inches per day (in/day)	millimeters per day (mm/day)
ETO	reference evapotranspiration	inches per day (in/day)	millimeters per day (mm/day)
I	electrical current	amps (A), milliamps (mA)	amps (A), milliamps (mA)
ID	inside diameter of pipe	inches (in)	millimeters (mm)
hf	energy loss due to friction	feet of water (ft)	meters of water (m)
Kc	crop coefficient	percent (%)	percent (%)
ks	constant used to compute sprinkler spacing	none/unitless	none/unitless
L	spacing between lateral lines	feet (ft)	meters (m)
MAD	management allowable depletion	none/unitless	none/unitless
MC	maximum coverage for single-row sprinklers	feet (ft)	meters (m)
OD	outside diameter of pipe	inches (in)	millimeters (mm)
P	pressure of water	pounds per inch ² (PSI)	kilopascals (kPa), bars (bar)
PR	precipitation rate	inches per day (in/day)	millimeters per day (mm/day)
Po	sprinkler operating pressure	pounds per inch ² (PSI)	kilopascals (kPa), bars (bar)
Q	flow of water in a pipe	gallons per minute (GPM)	cubic meters per hour (m ³ /hr), liters per second (lps)
R	electrical resistance	ohms (Ω)	ohms (Ω)
Rt	radius of throw	feet (ft)	meters (m)
S	sprinkler spacing	feet (ft)	meters (m)
SC	scheduling coefficient	none/unitless	none/unitless
v	average velocity of water in pipe	feet per second (fps)	meters per second (mps)
Vo	electrical voltage	volts (V)	volts (V)

PILOT FIELD CONTROLLER ELECTRICAL SPECIFICATIONS

ELECTRICAL SPECIFICATIONS

Supply Voltage

Auto-sensing frequency (50 or 60 Hz)
120 VAC nominal (100 to 132 VAC)¹
230 VAC nominal (200 to 260 VAC)¹
Station output: 24 VAC at 1.0 A

CAPACITIES

Station Capacity

80 stations
Up to 20 stations can run simultaneously²

Station Solenoid Load

Up to four 24 VAC Hunter golf solenoids per station output³

¹ To prevent damage, all Pilot Field Controllers are shipped with the supply voltage set to 230 VAC.

² One 24 VAC Hunter golf solenoid per station.

³ Multiple solenoids connected to a single station will reduce total simultaneous stations.

PILOT INTEGRATED HUB ELECTRICAL SPECIFICATIONS

ELECTRICAL SPECIFICATIONS

Supply Voltage

Auto-sensing frequency (50 or 60 Hz)
Auto-switching 120/230 VAC nominal (100 to 277 VAC at 50/60 Hz)¹

CAPACITIES

Integrated Two-Way Module Capacity

Up to 999 integrated Pilot[®] Two-Way Modules per Pilot Integrated Hub
Up to 120 24 VAC Hunter solenoids on at one time²

Integrated Two-Way Module Solenoid Load

Up to two 24 VAC Hunter solenoids per integrated Pilot Two-Way Module³


¹ The Pilot Integrated Hub automatically detects supply voltage and frequency.

² Depends on configuration. Pilot Integrated Hub will run up to 30 stations simultaneously per output module.


³ Two solenoids per Pilot Two-Way Module does not reduce the maximum simultaneous station count.

PILOT-FC CURRENT REQUIREMENT CHARTS

PILOT-FC FIELD CONTROLLER CURRENT REQUIREMENTS: 230 VAC/50 Hz Supply Voltage, 10 to 40 Stations, Various Loads and Communication Options

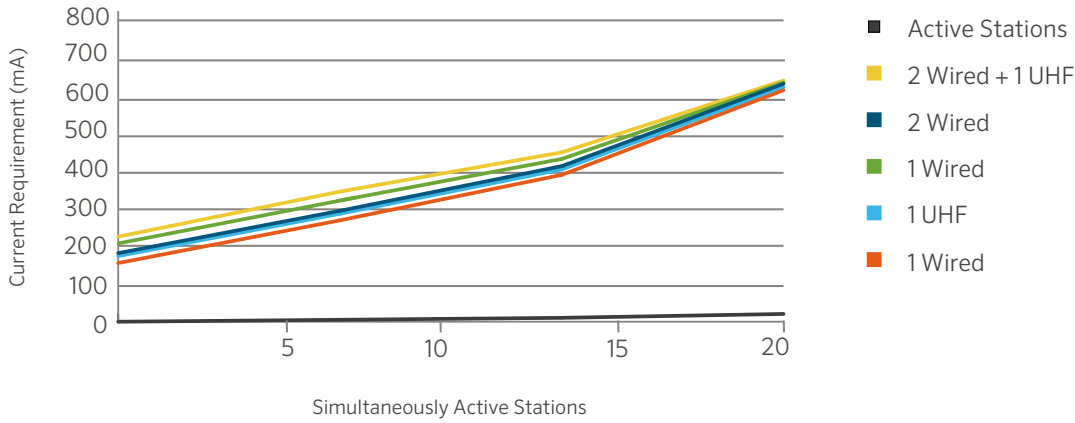


PILOT-FC FIELD CONTROLLER CURRENT REQUIREMENTS: 230 VAC/50 Hz Supply Voltage, 50 to 80 Stations, Various Loads and Communication Options

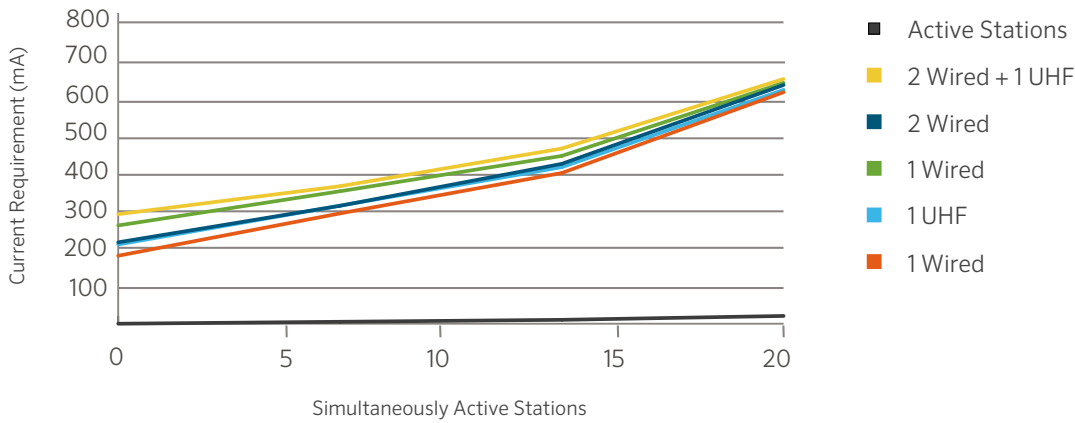

WIRE USE CHARTS

Active Stations Based on Wire Length and Number of Two-Way Modules Using ID1 (14 AWG) Wire

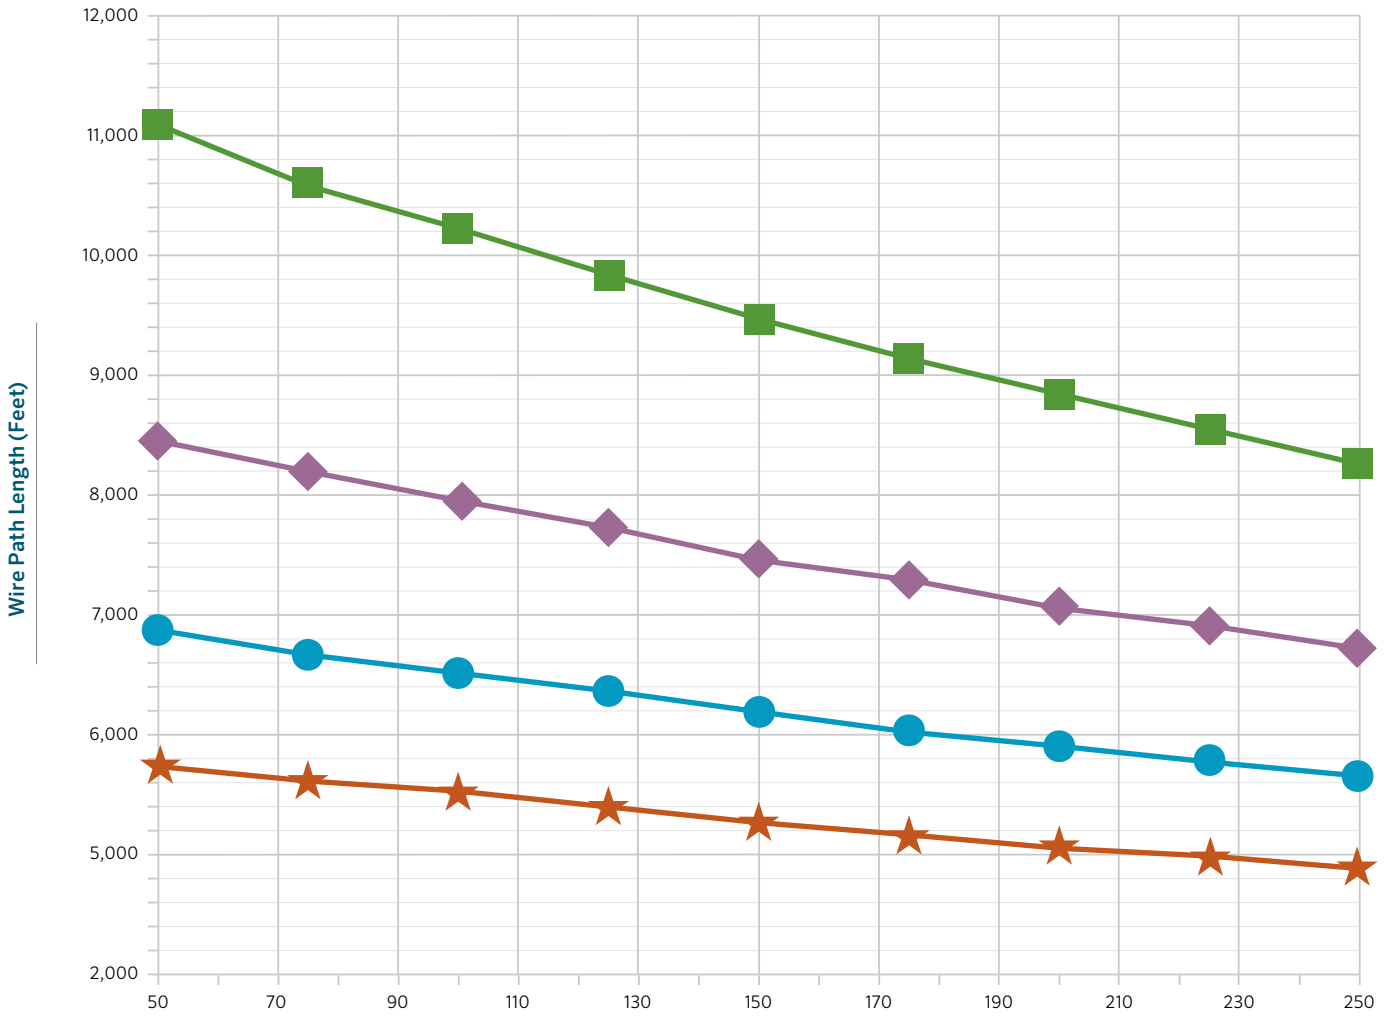

Total Number of Two-Way Modules on Wire Path

ACTIVE STATIONS

■	15
◆	20
●	25
★	30

WIRE SIZING

REQUIRED INFORMATION

- 1) Actual one-way length of wire between the controllers and the power source or the controllers and valves
- 2) Allowable voltage loss along the wire circuit
- 3) Accumulative current flowing through the wire section being sized in amperes

RESISTANCE IS CALCULATED USING THIS FORMULA:

$$R = \frac{1000 \times AVL}{2L \times I}$$

R = Maximum allowable resistance of wire in ohms per 1,000'

AVL = Allowable voltage loss

L = Wire length (one way)

I = Inrush current

AVL for controller power wire sizing is calculated by subtracting the minimum operating voltage required by the controller from the minimum available voltage at the power source.

AVL for valve wire sizing is calculated by subtracting minimum solenoid operating voltage from controller output voltage. This number will vary depending on the manufacturer and in some cases with line pressure.

VALVE WIRE SIZING EXAMPLE

Given: The distance from the controller to the valve is 1,800'. The controller output is 24 VAC. The valve has a minimum operating voltage of 20 VAC and an inrush current of 370 mA (0.37 A).

$$R = \frac{1,000 \times 4}{2(1,800) \times 0.37}$$

$$R = \frac{4,000}{1,332}$$

$$R = 3.00 \text{ ohms}/1,000 \text{ ft}$$

So, wire resistance cannot exceed 3.00 ohms per 1,000'. Now go to Table #1 and select the proper wire size. Since 18 gauge wire has more resistance than 3.00 ohms per 1,000', choose 14 gauge wire.

Table 2 is a quick reference and is set up to provide maximum wire runs given the information at the bottom of the table.

TABLE 1 - RESISTANCE OF COPPER WIRE

Wire Size (AWG)	Resistance at 68° F (ohms per 1,000')
18	6.39
16	4.02
14	2.52
12	1.59
10	1
8	0.63
6	0.4
4	0.25

TABLE 2 - VALVE WIRE SIZING

Ground Wire	Control Wire						
	18	16	14	12	10	8	6
18	850	1040	1210	1350	1460	1540	1590
16	1040	1340	1650	1920	2150	2330	2440
14	1210	1650	2150	2630	3080	3450	3700
12	1350	1920	2630	3390	4170	4880	5400
10	1460	2150	3080	4170	5400	6670	7690
8	1540	2330	3450	4880	6670	8700	10530
6	1590	2440	3700	5400	7690	10530	13330

Notes:

Maximum one-way distance in feet between controller and valve heavy-duty solenoid: 24 VAC, 350 mA inrush current, 190 mA holding current, 60 Hz; 370 mA inrush current, 210 mA holding current, 50 Hz.

Table 2 is for a single active solenoid. With two solenoids operating simultaneously on the same wires, the wire distances should be halved.

ADDITIONAL DATA

STANDARD ANNEALED COPPER AT 68°F						
American Wire Gauge	Common Metric Equivalent (mm ²)	Diameter (mils)	Diameter (mm)	Cross-Sectional Area (mm ²)	Resistance (Per mft ohms)	Resistance (per km ohms)
1	50	289.3	7.348	42.4	0.924	0.407
2	35	257.6	6.543	33.6	0.156	0.513
3		229.4	5.827	26.7	0.197	0.647
4	25	204.3	5.189	21.1	0.249	0.815
5		181.9	4.62	16.8	0.313	1.028
6	16	162	4.115	13.3	0.395	1.297
7		144.3	3.665	10.6	0.498	1.634
8	10	128.5	3.264	8.36	0.628	2.061
9		114.4	2.906	6.63	0.793	2.6
10	6	101.9	2.588	5.26	0.999	3.277
11		90.7	2.3	4.17	1.26	4.14
12	4	80.8	2.05	3.31	1.59	5.21
13		72	1.83	2.63	2	6.56
14	2.5	64.1	1.63	1.63	2.52	8.28
15		57.1	1.45	1.65	3.18	10.4
16	1.5	50.8	1.29	1.31	4.02	13.2
17		45.3	1.15	1.04	5.05	16.6
18	0.75	40.3	1.02	0.82	6.39	21
19		35.9	0.912	0.65	8.05	26.4
20	0.5	32	0.813	0.52	10.1	33.2

ESTIMATING PIPE SIZE			
Nominal Pipe Size	Approximate String Length in Inches		
	Copper Pipe	Galvanized (Sch. 40 Steel)	PVC Pipe
1/2"	2"	2 5/8"	2 5/8"
5/8"	2 3/8"		
3/4"	2 3/4"	3 5/16"	3 5/16"
1"	3 1/2"	4 1/8"	4 1/8"
1 1/4"	4 5/16"	5 3/16"	5 3/16"
1 1/2"	5 1/8"	6"	6"
2"	6 3/4"	7 1/16"	7 1/16"

Notes:

To determine the nominal size of a pipe, wrap a string around the pipe and compare its length to the chart above.

CLIMATE ETp TABLE	
Climate*	Inches Daily
Cool Humid	0.10 to 0.15
Cool Dry	0.15 to 0.20
Warm Humid	0.15 to 0.20
Warm Dry	0.20 to 0.25
Hot Humid	0.20 to 0.30
Hot Dry	0.30 to 0.45

Notes:

- * Cool = under 70°F as an average midsummer high
- * Warm = between 70° and 90°F as midsummer highs
- * Hot = over 90°F
- * Humid = over 50% as average midsummer relative humidity (dry=under 50%)

FRICION LOSS CHARTS: SCHEDULE 40 PVC

ASTM 1785 C=150 • PSI loss per 100 ft of pipe

Nominal Size Pipe ID	1" 1.029		1¼" 1.360		1½" 1.590		2" 2.047		2½" 2.445		3" 3.042		4" 3.998		6" 6.031	
	Flow (GPM)	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS
1	0.39	0.04	0.22	0.01	0.16	0.00	0.10	0.00	0.07	0.00	0.04	0.00	0.03	0.00	0.01	0.00
2	0.77	0.13	0.44	0.03	0.32	0.02	0.19	0.00	0.14	0.00	0.09	0.00	0.05	0.00	0.02	0.00
3	1.16	0.28	0.66	0.07	0.48	0.03	0.29	0.01	0.20	0.00	0.13	0.00	0.08	0.00	0.03	0.00
4	1.54	0.48	0.88	0.12	0.65	0.06	0.39	0.02	0.27	0.01	0.18	0.00	0.10	0.00	0.04	0.00
5	1.93	0.73	1.10	0.19	0.81	0.09	0.49	0.03	0.34	0.01	0.22	0.00	0.13	0.00	0.06	0.00
6	2.31	1.02	1.32	0.26	0.97	0.12	0.58	0.04	0.41	0.02	0.26	0.01	0.15	0.00	0.07	0.00
7	2.70	1.36	1.54	0.35	1.13	0.16	0.68	0.05	0.48	0.02	0.31	0.01	0.18	0.00	0.08	0.00
8	3.08	1.74	1.77	0.45	1.29	0.21	0.78	0.06	0.55	0.03	0.35	0.01	0.20	0.00	0.09	0.00
9	3.47	2.17	1.99	0.56	1.45	0.26	0.88	0.08	0.61	0.03	0.40	0.01	0.23	0.00	0.10	0.00
10	3.85	2.63	2.21	0.68	1.61	0.32	0.97	0.09	0.68	0.04	0.44	0.01	0.26	0.00	0.11	0.00
12	4.63	3.69	2.65	0.95	1.94	0.44	1.17	0.13	0.82	0.05	0.53	0.02	0.31	0.01	0.13	0.00
14	5.40	4.91	3.09	1.26	2.26	0.59	1.36	0.17	0.96	0.07	0.62	0.03	0.36	0.01	0.16	0.00
16	6.17	6.29	3.53	1.62	2.58	0.76	1.56	0.22	1.09	0.09	0.71	0.03	0.41	0.01	0.18	0.00
18	6.94	7.82	3.97	2.01	2.91	0.94	1.75	0.28	1.23	0.12	0.79	0.04	0.46	0.01	0.20	0.00
20	7.71	9.51	4.41	2.45	3.23	1.14	1.95	0.33	1.37	0.14	0.88	0.05	0.51	0.01	0.22	0.00
22	8.48	11.35	4.85	2.92	3.55	1.37	2.14	0.40	1.50	0.17	0.97	0.06	0.56	0.02	0.25	0.00
24	9.25	13.33	5.30	3.43	3.87	1.60	2.34	0.47	1.64	0.20	1.06	0.07	0.61	0.02	0.27	0.00
26			5.74	3.98	4.20	1.86	2.53	0.54	1.78	0.23	1.15	0.08	0.66	0.02	0.29	0.00
28			6.18	4.57	4.52	2.13	2.73	0.62	1.91	0.26	1.23	0.09	0.71	0.02	0.31	0.00
30			6.62	5.19	4.84	2.43	2.92	0.71	2.05	0.30	1.32	0.10	0.77	0.03	0.34	0.00
35			7.72	6.90	5.65	3.23	3.41	0.94	2.39	0.40	1.54	0.14	0.89	0.04	0.39	0.00
40			8.83	8.84	6.46	4.13	3.90	1.21	2.73	0.51	1.76	0.18	1.02	0.05	0.45	0.01
45			9.93	10.99	7.26	5.14	4.38	1.50	3.07	0.63	1.98	0.22	1.15	0.06	0.50	0.01
50					8.07	6.25	4.87	1.83	3.41	0.77	2.21	0.27	1.28	0.07	0.56	0.01
55					8.88	7.45	5.36	2.18	3.75	0.92	2.43	0.32	1.40	0.08	0.62	0.01
60					9.69	8.76	5.84	2.56	4.10	1.08	2.65	0.37	1.53	0.10	0.67	0.01
65							6.33	2.97	4.44	1.25	2.87	0.43	1.66	0.11	0.73	0.02
70							6.82	3.41	4.78	1.44	3.09	0.50	1.79	0.13	0.79	0.02
75							7.31	3.87	5.12	1.63	3.31	0.56	1.92	0.15	0.84	0.02
80							7.79	4.36	5.46	1.84	3.53	0.63	2.04	0.17	0.90	0.02
85							8.28	4.88	5.80	2.06	3.75	0.71	2.17	0.19	0.95	0.03
90							8.77	5.43	6.14	2.29	3.97	0.79	2.30	0.21	1.01	0.03
95							9.25	6.00	6.49	2.53	4.19	0.87	2.43	0.23	1.07	0.03
100							9.74	6.60	6.83	2.78	4.41	0.96	2.55	0.25	1.12	0.03
110									7.51	3.32	4.85	1.15	2.81	0.30	1.23	0.04
120									8.19	3.90	5.29	1.35	3.06	0.36	1.35	0.05
130									8.88	4.52	5.73	1.56	3.32	0.41	1.46	0.06
140									9.56	5.18	6.17	1.79	3.57	0.47	1.57	0.06
150											6.62	2.03	3.83	0.54	1.68	0.07
160											7.06	2.29	4.09	0.61	1.80	0.08
170											7.50	2.56	4.34	0.68	1.91	0.09
180											7.94	2.85	4.60	0.75	2.02	0.10
190											8.38	3.15	4.85	0.83	2.13	0.11
200											8.82	3.47	5.11	0.92	2.24	0.12
225											9.92	4.31	5.75	1.14	2.52	0.15
250													6.38	1.39	2.81	0.19
275													7.02	1.65	3.09	0.22
300													7.66	1.94	3.37	0.26
325													8.30	2.25	3.65	0.30
350													8.94	2.58	3.93	0.35
375													9.58	2.94	4.21	0.40
400															4.49	0.45
425															4.77	0.50
450															5.05	0.56
475															5.33	0.62
500															5.61	0.68
525															5.89	0.74
550															6.17	0.81
575															6.45	0.88
600															6.73	0.95
625															7.01	1.02
650															7.29	1.10
675															7.57	1.18
700															7.85	1.26
725															8.14	1.35

FRICITION LOSS CHARTS: CLASS 160 SDR 26 PVC IPS 160 PSI

ANSI/ASAE S376.2 ASTM D2241 C=150 • PSI loss per 100 ft of pipe																		
Nominal Size	1½"		2"		2½"		3"		4"		6"		8"		10"		12"	
Pipe OD	1.950		2.375		2.875		3.500		4.500		6.625		8.625		10.750		12.750	
Min. Wall	0.073		0.091		0.110		0.135		0.173		0.255		0.332		0.413		0.490	
Pipe ID	1.734		2.173		2.635		3.210		4.134		6.084		7.921		11.710		11.710	
Flow (GPM)	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss
1	0.14	0.00																
2	0.27	0.01	0.17	0.00														
3	0.41	0.02	0.26	0.01														
4	0.54	0.04	0.35	0.01	0.24	0.00												
5	0.68	0.06	0.43	0.02	0.29	0.01												
10	1.36	0.21	0.86	0.07	0.59	0.03	0.40	0.01										
15	2.04	0.44	1.30	0.15	0.88	0.06	0.59	0.02	0.36	0.01								
20	2.71	0.75	1.73	0.25	1.18	0.10	0.79	0.04	0.48	0.01								
25	3.39	1.13	2.16	0.38	1.47	0.15	0.99	0.06	0.60	0.02								
30	4.07	1.59	2.59	0.53	1.76	0.21	1.19	0.08	0.72	0.02								
35	4.75	2.12	3.03	0.71	2.06	0.28	1.39	0.11	0.84	0.03	0.39	0.00	0.23	0.00	0.15	0.00	0.10	0.00
40	5.43	2.71	3.46	0.90	2.35	0.35	1.58	0.14	0.96	0.04	0.44	0.01	0.26	0.00	0.17	0.00	0.12	0.00
45	6.11	3.37	3.89	1.12	2.65	0.44	1.78	0.17	1.07	0.05	0.50	0.01	0.29	0.00	0.19	0.00	0.13	0.00
50	6.79	4.10	4.32	1.37	2.94	0.53	1.98	0.20	1.19	0.06	0.55	0.01	0.33	0.00	0.21	0.00	0.15	0.00
55	7.47	4.89	4.75	1.63	3.23	0.64	2.18	0.24	1.31	0.07	0.61	0.01	0.36	0.00	0.23	0.00	0.16	0.00
60	8.14	5.74	5.19	1.92	3.53	0.75	2.38	0.29	1.43	0.08	0.66	0.01	0.39	0.00	0.25	0.00	0.18	0.00
70	9.50	7.64	6.05	2.55	4.11	1.00	2.77	0.38	1.67	0.11	0.77	0.02	0.46	0.00	0.29	0.00	0.21	0.00
80			6.91	3.26	4.70	1.28	3.17	0.49	1.91	0.14	0.88	0.02	0.52	0.01	0.33	0.00	0.24	0.00
90			7.78	4.06	5.29	1.59	3.56	0.61	2.15	0.18	0.99	0.03	0.59	0.01	0.38	0.00	0.27	0.00
100			8.64	4.93	5.88	1.93	3.96	0.74	2.39	0.22	1.10	0.03	0.65	0.01	0.42	0.00	0.30	0.00
150					8.82	4.09	5.94	1.57	3.58	0.46	1.65	0.07	0.98	0.02	0.63	0.01	0.45	0.00
200							7.92	2.67	4.78	0.78	2.21	0.12	1.30	0.03	0.84	0.01	0.60	0.00
250							9.90	4.03	5.97	1.18	2.76	0.18	1.63	0.05	1.05	0.02	0.74	0.01
300									7.16	1.65	3.31	0.25	1.95	0.07	1.26	0.02	0.89	0.01
350									8.36	2.20	3.86	0.34	2.28	0.09	1.47	0.03	1.04	0.01
400									9.55	2.81	4.41	0.43	2.60	0.12	1.67	0.04	1.19	0.02
450											4.96	0.53	2.93	0.15	1.88	0.05	1.34	0.02
500											5.51	0.65	3.25	0.18	2.09	0.06	1.49	0.03
550											6.06	0.77	3.58	0.21	2.30	0.07	1.64	0.03
600											6.62	0.91	3.90	0.25	2.51	0.09	1.79	0.04
700											7.72	1.21	4.55	0.34	2.93	0.11	2.08	0.05
800											8.82	1.55	5.20	0.43	3.35	0.15	2.38	0.06
900											9.92	1.93	5.85	0.53	3.77	0.18	2.68	0.08
1,000											6.50	0.65	4.19	0.22	2.98	0.10		
1,100											7.16	0.77	4.60	0.26	3.27	0.12		
1,200													7.81	0.91	5.02	0.31	3.57	0.14
1,300													8.46	1.05	5.44	0.36	3.87	0.16
1,400													9.11	1.21	5.86	0.41	4.17	0.18
1,500													9.76	1.37	6.28	0.47	4.46	0.21
1,600															6.70	0.53	4.76	0.23
1,700															7.12	0.59	5.06	0.26
1,800															7.54	0.66	5.36	0.29
1,900															7.95	0.73	5.66	0.32
2,000															8.37	0.80	5.95	0.35
2,100															8.79	0.88	6.25	0.38
2,200															9.21	0.96	6.55	0.42
2,300															9.63	1.04	6.85	0.45
2,400																	7.14	0.49
2,500																	7.44	0.53
2,600																	7.74	0.57
2,700																	8.04	0.61
2,800																	8.33	0.65
2,900																	8.63	0.70
3,000																	8.93	0.74
3,250																	9.67	0.86

FRICION LOSS CHARTS: CLASS 200 SDR 21 PVC IPS

ANSI/ASAE S376.2 ASTM D2241 C=150 • PSI loss per 100 ft of pipe

Nominal Size Pipe OD Min. Wall Pipe ID	1½"		2"		2½"		3"		4"		6"		8"		10"		12"	
	1.950	2.375	2.875	3.500	4.500	6.625	8.625	10.750	12.750	0.090	0.113	0.137	0.167	0.214	0.316	0.410	0.511	0.606
Flow (GPM)	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss
1	0.14	0.00	0.09	0.00														
2	0.28	0.01	0.18	0.00														
3	0.42	0.02	0.27	0.01														
4	0.56	0.04	0.36	0.01	0.25	0.01												
5	0.71	0.06	0.45	0.02	0.31	0.01												
10	1.41	0.23	0.90	0.08	0.61	0.03	0.41	0.01										
15	2.12	0.49	1.35	0.16	0.92	0.06	0.62	0.02										
20	2.82	0.83	1.80	0.28	1.23	0.11	0.82	0.04	0.50	0.01								
25	3.53	1.25	2.25	0.42	1.53	0.16	1.03	0.06	0.62	0.02								
30	4.24	1.75	2.70	0.59	1.84	0.23	1.24	0.09	0.75	0.03								
35	4.94	2.33	3.15	0.78	2.14	0.31	1.44	0.12	0.87	0.03	0.40	0.01	0.24	0.00	0.15	0.00	0.11	0.00
40	5.65	2.98	3.60	1.00	2.45	0.39	1.65	0.15	1.00	0.04	0.46	0.01	0.27	0.00	0.17	0.00	0.12	0.00
45	6.35	3.71	4.05	1.24	2.76	0.49	1.86	0.19	1.12	0.05	0.52	0.01	0.31	0.00	0.20	0.00	0.14	0.00
50	7.06	4.51	4.50	1.51	3.06	0.59	2.06	0.23	1.25	0.07	0.58	0.01	0.34	0.00	0.22	0.00	0.16	0.00
55	7.77	5.38	4.95	1.80	3.37	0.71	2.27	0.27	1.37	0.08	0.63	0.01	0.37	0.00	0.24	0.00	0.17	0.00
60	8.47	6.32	5.40	2.12	3.68	0.83	2.47	0.32	1.50	0.09	0.69	0.01	0.41	0.00	0.26	0.00	0.19	0.00
70	9.89	8.41	6.30	2.81	4.29	1.10	2.89	0.42	1.75	0.12	0.81	0.02	0.48	0.01	0.31	0.00	0.22	0.00
80			7.20	3.60	4.90	1.41	3.30	0.54	1.99	0.16	0.92	0.02	0.54	0.01	0.35	0.00	0.25	0.00
90			8.10	4.48	5.51	1.76	3.71	0.67	2.24	0.20	1.04	0.03	0.61	0.01	0.39	0.00	0.28	0.00
100			9.00	5.45	6.13	2.14	4.12	0.82	2.49	0.24	1.15	0.04	0.68	0.01	0.44	0.00	0.31	0.00
150					9.19	4.53	6.19	1.73	3.74	0.51	1.73	0.08	1.02	0.02	0.66	0.01	0.47	0.00
200							8.25	2.94	4.99	0.87	2.30	0.13	1.36	0.04	0.87	0.01	0.62	0.01
250									6.23	1.31	2.88	0.20	1.70	0.06	1.09	0.02	0.78	0.01
300									7.48	1.83	3.45	0.28	2.04	0.08	1.31	0.03	0.93	0.01
350									8.73	2.44	4.03	0.37	2.38	0.10	1.53	0.04	1.09	0.02
400									9.97	3.12	4.60	0.48	2.71	0.13	1.75	0.05	1.24	0.02
450											5.18	0.59	3.05	0.16	1.97	0.06	1.40	0.02
500											5.75	0.72	3.39	0.20	2.18	0.07	1.55	0.03
550											6.33	0.86	3.73	0.24	2.40	0.08	1.71	0.04
600											6.91	1.01	4.07	0.28	2.62	0.10	1.86	0.04
700											8.06	1.34	4.75	0.37	3.06	0.13	2.17	0.06
800											9.21	1.72	5.43	0.48	3.49	0.16	2.48	0.07
900													6.11	0.59	3.93	0.20	2.79	0.09
1,000													6.79	0.72	4.37	0.25	3.11	0.11
1,100													7.46	0.86	4.81	0.29	3.42	0.13
1,200													8.14	1.01	5.24	0.35	3.73	0.15
1,300													8.82	1.17	5.68	0.40	4.04	0.17
1,400													9.50	1.34	6.12	0.46	4.35	0.20
1,500															6.55	0.52	4.66	0.23
1,600															6.99	0.59	4.97	0.26
1,700															7.43	0.66	5.28	0.29
1,800															7.86	0.73	5.59	0.32
1,900															8.30	0.81	5.90	0.35
2,000															8.74	0.89	6.21	0.39
2,100															9.17	0.97	6.52	0.42
2,200															9.61	1.06	6.83	0.46
2,300																	7.14	0.50
2,400																	7.45	0.54
2,500																	7.76	0.59
2,600																	8.07	0.63
2,700																	8.38	0.68
2,800																	8.70	0.72
2,900																	9.01	0.77
3,000																	9.32	0.82
3,250																		

FRICION LOSS CHARTS: HDPE DR 13.5 128 PSI

ANSI/ASAE S376.2 PE3408 ASTM D2239 C=150 • PSI loss per 100 ft of pipe																		
Nominal Size	3"		4"		6"		8"		10"		12"		14"		16"		18"	
Pipe OD	3.500		4.500		6.625		8.625		10.750		12.750		14.000		16.000		18.000	
Min. Wall	0.275		0.353		0.521		0.678		0.844		1.001		1.099		1.256		1.413	
Pipe ID	2.950		3.794		5.583		7.269		9.062		10.748		11.802		13.488		15.174	
Flow (GPM)	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss
50	2.34	0.31	1.42	0.09	0.65	0.01												
60	2.81	0.43	1.70	0.13	0.79	0.02												
70	3.28	0.58	1.98	0.17	0.92	0.03												
80	3.75	0.74	2.27	0.22	1.05	0.03												
90	4.22	0.92	2.55	0.27	1.18	0.04												
100	4.69	1.11	2.84	0.33	1.31	0.05	0.77	0.01										
120	5.63	1.56	3.40	0.46	1.57	0.07	0.93	0.02										
140	6.57	2.08	3.97	0.61	1.83	0.09	1.08	0.03										
160	7.50	2.66	4.54	0.78	2.09	0.12	1.24	0.03										
180	8.44	3.31	5.10	0.97	2.36	0.15	1.39	0.04										
200	9.38	4.02	5.67	1.18	2.62	0.18	1.54	0.05	0.99	0.02	0.71	0.01						
220			6.24	1.41	2.88	0.22	1.70	0.06	1.09	0.02	0.78	0.01						
240			6.80	1.66	3.14	0.25	1.85	0.07	1.19	0.02	0.85	0.01						
260			7.37	1.92	3.40	0.29	2.01	0.08	1.29	0.03	0.92	0.01						
280			7.94	2.21	3.67	0.34	2.16	0.09	1.39	0.03	0.99	0.01						
300			8.51	2.51	3.93	0.38	2.32	0.11	1.49	0.04	1.06	0.02						
320			9.07	2.82	4.19	0.43	2.47	0.12	1.59	0.04	1.13	0.02	0.94	0.01				
340			9.64	3.16	4.45	0.48	2.63	0.13	1.69	0.05	1.20	0.02	1.00	0.01				
360					4.71	0.54	2.78	0.15	1.79	0.05	1.27	0.02	1.05	0.01				
380					4.98	0.59	2.94	0.16	1.89	0.06	1.34	0.02	1.11	0.02				
400					5.24	0.65	3.09	0.18	1.99	0.06	1.41	0.03	1.17	0.02				
450					5.89	0.81	3.48	0.22	2.24	0.08	1.59	0.03	1.32	0.02	1.01	0.01		
500					6.55	0.99	3.86	0.27	2.48	0.09	1.77	0.04	1.47	0.03	1.12	0.01		
550					7.20	1.18	4.25	0.33	2.73	0.11	1.94	0.05	1.61	0.03	1.23	0.02		
600					7.86	1.38	4.63	0.38	2.98	0.13	2.12	0.06	1.76	0.04	1.35	0.02		
650					8.51	1.60	5.02	0.44	3.23	0.15	2.30	0.07	1.90	0.04	1.46	0.02		
700					9.17	1.84	5.41	0.51	3.48	0.17	2.47	0.08	2.05	0.05	1.57	0.03	1.24	0.01
750					9.82	2.09	5.79	0.58	3.73	0.20	2.65	0.09	2.20	0.05	1.68	0.03	1.33	0.02
800							6.18	0.65	3.98	0.22	2.83	0.10	2.34	0.06	1.79	0.03	1.42	0.02
850							6.57	0.73	4.22	0.25	3.00	0.11	2.49	0.07	1.91	0.04	1.51	0.02
900							6.95	0.81	4.47	0.28	3.18	0.12	2.64	0.08	2.02	0.04	1.60	0.02
950							7.34	0.90	4.72	0.31	3.36	0.13	2.78	0.08	2.13	0.04	1.68	0.02
1,000							7.72	0.99	4.97	0.34	3.53	0.15	2.93	0.09	2.24	0.05	1.77	0.03
1,050							8.11	1.08	5.22	0.37	3.71	0.16	3.08	0.10	2.36	0.05	1.86	0.03
1,100							8.50	1.18	5.47	0.40	3.89	0.18	3.22	0.11	2.47	0.06	1.95	0.03
1,150							8.88	1.28	5.72	0.44	4.06	0.19	3.37	0.12	2.58	0.06	2.04	0.04
1,200							9.27	1.38	5.96	0.47	4.24	0.21	3.52	0.13	2.69	0.07	2.13	0.04
1,250							9.66	1.49	6.21	0.51	4.42	0.22	3.66	0.14	2.80	0.07	2.22	0.04
1,300									6.46	0.55	4.59	0.24	3.81	0.15	2.92	0.08	2.30	0.04
1,350									6.71	0.59	4.77	0.26	3.96	0.16	3.03	0.08	2.39	0.05
1,400									6.96	0.63	4.95	0.27	4.10	0.17	3.14	0.09	2.48	0.05
1,450									7.21	0.67	5.12	0.29	4.25	0.19	3.25	0.10	2.57	0.05
1,500									7.45	0.71	5.30	0.31	4.40	0.20	3.37	0.10	2.66	0.06
1,550									7.70	0.76	5.48	0.33	4.54	0.21	3.48	0.11	2.75	0.06
1,600									7.95	0.80	5.65	0.35	4.69	0.22	3.59	0.12	2.84	0.07
1,650									8.20	0.85	5.83	0.37	4.83	0.24	3.70	0.12	2.92	0.07
1,700									8.45	0.90	6.01	0.39	4.98	0.25	3.81	0.13	3.01	0.07
1,750									8.70	0.95	6.18	0.41	5.13	0.26	3.93	0.14	3.10	0.08
1,800									8.95	1.00	6.36	0.44	5.27	0.28	4.04	0.14	3.19	0.08
1,850									9.19	1.05	6.54	0.46	5.42	0.29	4.15	0.15	3.28	0.09
1,900									9.44	1.11	6.71	0.48	5.57	0.31	4.26	0.16	3.37	0.09
1,950									9.69	1.16	6.89	0.51	5.71	0.32	4.37	0.17	3.46	0.09
2,000									9.94	1.22	7.07	0.53	5.86	0.34	4.49	0.18	3.55	0.10
2,100											7.42	0.58	6.15	0.37	4.71	0.19	3.72	0.11
2,200											7.77	0.63	6.45	0.40	4.94	0.21	3.90	0.12
2,300											8.13	0.69	6.74	0.44	5.16	0.23	4.08	0.13
2,400											8.48	0.74	7.03	0.47	5.38	0.25	4.25	0.14
2,500											8.83	0.80	7.33	0.51	5.61	0.27	4.43	0.15
2,600											9.19	0.86	7.62	0.55	5.83	0.29	4.61	0.16
2,700											9.54	0.92	7.91	0.59	6.06	0.31	4.79	0.17
2,800											9.89	0.99	8.20	0.63	6.28	0.33	4.96	0.18
2,900													8.50	0.67	6.51	0.35	5.14	0.20
3,000													8.79	0.71	6.73	0.37	5.32	0.21
3,500															7.85	0.50	6.20	0.28
4,000															8.97	0.63	7.09	0.36
4,500																	7.98	0.44
5,000																	8.86	0.54

FRICITION LOSS CHARTS: HDPE DR 11 160 PSI

ANSI/ASAE S376.2 PE3408 ASTM D2239 C=150 • PSI loss per 100 ft of pipe

Nominal Size Pipe OD Min. Wall Pipe ID	3"		4"		6"		8"		10"		12"		14"		16"		18"	
	3.500		4.500		6.625		8.625		10.750		12.750		14.000		16.000		18.000	
	0.318		0.409		0.602		0.784		0.977		1.159		1.273		1.455		1.636	
	2.826		3.632		5.349		6.963		8.678		10.292		11.300		12.914		14.532	
Flow (GPM)	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss
50	2.56	0.38	1.55	0.11	0.71	0.02												
60	3.07	0.53	1.86	0.16	0.86	0.02												
70	3.58	0.71	2.17	0.21	1.00	0.03												
80	4.09	0.91	2.48	0.27	1.14	0.04												
90	4.60	1.13	2.78	0.33	1.28	0.05												
100	5.11	1.37	3.09	0.41	1.43	0.06	0.84	0.02										
120	6.13	1.93	3.71	0.57	1.71	0.09	1.01	0.02										
140	7.16	2.56	4.33	0.76	2.00	0.11	1.18	0.03										
160	8.18	3.28	4.95	0.97	2.28	0.15	1.35	0.04										
180	9.20	4.08	5.57	1.20	2.57	0.18	1.52	0.05										
200			6.19	1.46	2.85	0.22	1.68	0.06	1.08	0.02	0.77	0.01						
220			6.81	1.75	3.14	0.27	1.85	0.07	1.19	0.03	0.85	0.01						
240			7.43	2.05	3.42	0.31	2.02	0.09	1.30	0.03	0.92	0.01						
260			8.04	2.38	3.71	0.36	2.19	0.10	1.41	0.03	1.00	0.01						
280			8.66	2.73	3.99	0.41	2.36	0.11	1.52	0.04	1.08	0.02						
300			9.28	3.10	4.28	0.47	2.53	0.13	1.63	0.04	1.16	0.02						
320			9.90	3.49	4.56	0.53	2.69	0.15	1.73	0.05	1.23	0.02	1.02	0.01				
340					4.85	0.59	2.86	0.16	1.84	0.06	1.31	0.02	1.09	0.02				
360					5.14	0.66	3.03	0.18	1.95	0.06	1.39	0.03	1.15	0.02				
380					5.42	0.73	3.20	0.20	2.06	0.07	1.46	0.03	1.21	0.02				
400					5.71	0.80	3.37	0.22	2.17	0.08	1.54	0.03	1.28	0.02				
450					6.42	1.00	3.79	0.28	2.44	0.09	1.73	0.04	1.44	0.03				
500					7.13	1.21	4.21	0.34	2.71	0.12	1.93	0.05	1.60	0.03	1.22	0.02		
550					7.85	1.45	4.63	0.40	2.98	0.14	2.12	0.06	1.76	0.04	1.35	0.02		
600					8.56	1.70	5.05	0.47	3.25	0.16	2.31	0.07	1.92	0.04	1.47	0.02		
650					9.27	1.97	5.47	0.55	3.52	0.19	2.50	0.08	2.08	0.05	1.59	0.03		
700					9.99	2.26	5.89	0.63	3.79	0.21	2.70	0.09	2.24	0.06	1.71	0.03	1.35	0.02
750							6.31	0.71	4.06	0.24	2.89	0.11	2.40	0.07	1.84	0.04	1.45	0.02
800							6.73	0.80	4.34	0.28	3.08	0.12	2.56	0.08	1.96	0.04	1.55	0.02
850							7.16	0.90	4.61	0.31	3.28	0.13	2.72	0.09	2.08	0.04	1.64	0.03
900							7.58	1.00	4.88	0.34	3.47	0.15	2.88	0.09	2.20	0.05	1.74	0.03
950							8.00	1.10	5.15	0.38	3.66	0.16	3.04	0.10	2.32	0.05	1.84	0.03
1,000							8.42	1.21	5.42	0.42	3.85	0.18	3.20	0.12	2.45	0.06	1.93	0.03
1,050							8.84	1.33	5.69	0.46	4.05	0.20	3.36	0.13	2.57	0.07	2.03	0.04
1,100							9.26	1.45	5.96	0.50	4.24	0.22	3.52	0.14	2.69	0.07	2.13	0.04
1,150							9.68	1.57	6.23	0.54	4.43	0.24	3.68	0.15	2.81	0.08	2.22	0.04
1,200									6.50	0.58	4.62	0.25	3.84	0.16	2.94	0.08	2.32	0.05
1,250									6.77	0.63	4.82	0.27	4.00	0.17	3.06	0.09	2.42	0.05
1,300									7.05	0.68	5.01	0.29	4.16	0.19	3.18	0.10	2.51	0.06
1,350									7.32	0.73	5.20	0.32	4.31	0.20	3.30	0.10	2.61	0.06
1,400									7.59	0.78	5.39	0.34	4.47	0.21	3.43	0.11	2.71	0.06
1,450									7.86	0.83	5.59	0.36	4.63	0.23	3.55	0.12	2.80	0.07
1,500									8.13	0.88	5.78	0.38	4.79	0.24	3.67	0.13	2.90	0.07
1,550									8.40	0.94	5.97	0.41	4.95	0.26	3.79	0.14	3.00	0.08
1,600									8.67	0.99	6.16	0.43	5.11	0.28	3.92	0.14	3.09	0.08
1,650									8.94	1.05	6.36	0.46	5.27	0.29	4.04	0.15	3.19	0.09
1,700									9.21	1.11	6.55	0.48	5.43	0.31	4.16	0.16	3.29	0.09
1,750									9.48	1.17	6.74	0.51	5.59	0.32	4.28	0.17	3.38	0.10
1,800									9.76	1.24	6.94	0.54	5.75	0.34	4.41	0.18	3.48	0.10
1,850											7.13	0.57	5.91	0.36	4.53	0.19	3.58	0.11
1,900											7.32	0.60	6.07	0.38	4.65	0.20	3.67	0.11
1,950											7.51	0.63	6.23	0.40	4.77	0.21	3.77	0.12
2,000											7.71	0.66	6.39	0.42	4.89	0.22	3.87	0.12
2,100											8.09	0.72	6.71	0.46	5.14	0.24	4.06	0.13
2,200											8.48	0.78	7.03	0.50	5.38	0.26	4.25	0.15
2,300											8.86	0.85	7.35	0.54	5.63	0.28	4.45	0.16
2,400											9.25	0.92	7.67	0.58	5.87	0.30	4.64	0.17
2,500											9.63	0.99	7.99	0.63	6.12	0.33	4.83	0.18
2,600													8.31	0.68	6.36	0.35	5.02	0.20
2,700													8.63	0.72	6.61	0.38	5.22	0.21
2,800													8.95	0.78	6.85	0.40	5.41	0.23
2,900													9.27	0.83	7.10	0.43	5.60	0.24
3,000													9.59	0.88	7.34	0.46	5.80	0.26
3,500															8.57	0.61	6.76	0.34
4,000															9.79	0.78	7.73	0.44
4,500																	8.70	0.55
5,000																	9.66	0.67

FRICITION LOSS CHARTS: HDPE DR 9 200 PSI

ANSI/ASAE S376.2 PE3408 ASTM D2239 C=150 • PSI loss per 100 ft of pipe																		
Nominal Size	3"		4"		6"		8"		10"		12"		14"		16"		18"	
Pipe OD	3.500		4.500		6.625		8.625		10.750		12.750		14.000		16.000		18.000	
Min. Wall	0.389		0.500		0.736		0.958		1.194		1.417		1.556		1.778		2.000	
Pipe ID	2.674		3.440		5.065		6.593		8.218		9.746		10.700		12.230		13.760	
Flow (GPM)	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss	Velocity FPS	PSI Loss
50	2.85	0.50	1.72	0.15	0.80	0.02												
60	3.42	0.70	2.07	0.20	0.95	0.03												
70	4.00	0.93	2.41	0.27	1.11	0.04												
80	4.57	1.19	2.76	0.35	1.27	0.05												
90	5.14	1.48	3.10	0.43	1.43	0.07												
100	5.71	1.80	3.45	0.53	1.59	0.08	0.94	0.02										
120	6.85	2.52	4.14	0.74	1.91	0.11	1.13	0.03										
140	7.99	3.35	4.83	0.98	2.23	0.15	1.31	0.04										
160	9.13	4.29	5.52	1.26	2.55	0.19	1.50	0.05	0.97	0.02								
180			6.21	1.57	2.86	0.24	1.69	0.07	1.09	0.02								
200			6.90	1.91	3.18	0.29	1.88	0.08	1.21	0.03								
220			7.59	2.27	3.50	0.35	2.07	0.10	1.33	0.03								
240			8.28	2.67	3.82	0.41	2.25	0.11	1.45	0.04	1.03	0.02						
260			8.97	3.10	4.14	0.47	2.44	0.13	1.57	0.04	1.12	0.02						
280			9.66	3.55	4.45	0.54	2.63	0.15	1.69	0.05	1.20	0.02						
300					4.77	0.61	2.82	0.17	1.81	0.06	1.29	0.03	1.07	0.02				
320					5.09	0.69	3.00	0.19	1.93	0.07	1.37	0.03	1.14	0.02				
340					5.41	0.77	3.19	0.21	2.05	0.07	1.46	0.03	1.21	0.02				
360					5.73	0.86	3.38	0.24	2.18	0.08	1.55	0.04	1.28	0.02				
380					6.05	0.95	3.57	0.26	2.30	0.09	1.63	0.04	1.35	0.03				
400					6.36	1.05	3.76	0.29	2.42	0.10	1.72	0.04	1.43	0.03				
450					7.16	1.30	4.23	0.36	2.72	0.12	1.93	0.05	1.60	0.03	1.23	0.02		
500					7.95	1.58	4.69	0.44	3.02	0.15	2.15	0.07	1.78	0.04	1.36	0.02		
550					8.75	1.89	5.16	0.52	3.32	0.18	2.36	0.08	1.96	0.05	1.50	0.03		
600					9.55	2.22	5.63	0.62	3.63	0.21	2.58	0.09	2.14	0.06	1.64	0.03	1.29	0.02
650							6.10	0.71	3.93	0.24	2.79	0.11	2.32	0.07	1.77	0.04	1.40	0.02
700							6.57	0.82	4.23	0.28	3.01	0.12	2.50	0.08	1.91	0.04	1.51	0.02
750							7.04	0.93	4.53	0.32	3.22	0.14	2.67	0.09	2.05	0.05	1.62	0.03
800							7.51	1.05	4.83	0.36	3.44	0.16	2.85	0.10	2.18	0.05	1.72	0.03
850							7.98	1.17	5.14	0.40	3.65	0.18	3.03	0.11	2.32	0.06	1.83	0.03
900							8.45	1.30	5.44	0.45	3.87	0.19	3.21	0.12	2.46	0.06	1.94	0.04
950							8.92	1.44	5.74	0.49	4.08	0.22	3.39	0.14	2.59	0.07	2.05	0.04
1,000							9.39	1.58	6.04	0.54	4.30	0.24	3.56	0.15	2.73	0.08	2.16	0.04
1,050							9.86	1.73	6.35	0.59	4.51	0.26	3.74	0.16	2.87	0.09	2.26	0.05
1,100									6.65	0.65	4.73	0.28	3.92	0.18	3.00	0.09	2.37	0.05
1,150									6.95	0.70	4.94	0.31	4.10	0.19	3.14	0.10	2.48	0.06
1,200									7.25	0.76	5.16	0.33	4.28	0.21	3.27	0.11	2.59	0.06
1,250									7.55	0.82	5.37	0.36	4.46	0.23	3.41	0.12	2.69	0.07
1,300									7.86	0.88	5.59	0.38	4.63	0.24	3.55	0.13	2.80	0.07
1,350									8.16	0.95	5.80	0.41	4.81	0.26	3.68	0.14	2.91	0.08
1,400									8.46	1.01	6.02	0.44	4.99	0.28	3.82	0.15	3.02	0.08
1,450									8.76	1.08	6.23	0.47	5.17	0.30	3.96	0.16	3.13	0.09
1,500									9.06	1.15	6.45	0.50	5.35	0.32	4.09	0.17	3.23	0.09
1,550									9.37	1.22	6.66	0.53	5.53	0.34	4.23	0.18	3.34	0.10
1,600									9.67	1.30	6.87	0.56	5.70	0.36	4.37	0.19	3.45	0.11
1,650									9.97	1.37	7.09	0.60	5.88	0.38	4.50	0.20	3.56	0.11
1,700											7.30	0.63	6.06	0.40	4.64	0.21	3.66	0.12
1,750											7.52	0.67	6.24	0.42	4.78	0.22	3.77	0.12
1,800											7.73	0.70	6.42	0.45	4.91	0.23	3.88	0.13
1,850											7.95	0.74	6.59	0.47	5.05	0.24	3.99	0.14
1,900											8.16	0.78	6.77	0.49	5.18	0.26	4.10	0.14
1,950											8.38	0.81	6.95	0.52	5.32	0.27	4.20	0.15
2,000											8.59	0.85	7.13	0.54	5.46	0.28	4.31	0.16
2,100											9.02	0.93	7.49	0.59	5.73	0.31	4.53	0.17
2,200											9.45	1.02	7.84	0.65	6.00	0.34	4.74	0.19
2,300											9.88	1.11	8.20	0.70	6.28	0.37	4.96	0.21
2,400													8.56	0.76	6.55	0.40	5.17	0.22
2,500													8.91	0.82	6.82	0.43	5.39	0.24
2,600													9.27	0.88	7.09	0.46	5.60	0.26
2,700													9.62	0.95	7.37	0.49	5.82	0.28
2,800													9.98	1.01	7.64	0.53	6.04	0.30
2,900															7.91	0.56	6.25	0.32
3,000															8.19	0.60	6.47	0.34
3,500															9.55	0.80	7.54	0.45
4,000																	8.62	0.58
4,500																	9.70	0.72
5,000																	10.78	0.87

STATEMENT OF WARRANTY

Hunter Residential and Commercial Irrigation Products

Hunter Industries Incorporated (“Hunter”) warrants the following products to be free of defects in materials or workmanship under normal use in landscape irrigation applications for the specified period of time outlined below from the original date of manufacture:

ONE YEAR	ROTORS	SRM	MICRO	Micro Sprays, PLD Fittings, Rigid Risers, Air Relief Valves, RZB
TWO YEARS	ROTORS	PGP-ADJ, PGJ, HCV	CONTROLLERS	ACC (Legacy), BTT, Eco-Logic, HC, HCC, HPC, I-Core/DUAL Families (Legacy), NODE, NODE-BT, Pro-C Families, Pro-HC, PSR, ROAM, X2, X-Core, XC Hybrid, WAND
	SPRAYS	PS Ultra Family, SJ, FlexSG, HSBE Family	SENSORS	HC Flow Meter (wired and wireless)
	NOZZLES	Spray Nozzles, PCN, PCB, AFB, MSBN	MICRO	ACZ, PCZ, RZWS, Point Source Emitters, Tubing, Multi-Port Emitters, IH Risers, MLD, Eco-Indicator, Multi-Purpose Box, Senninger Regulators, PLD-LOC Fittings
	VALVES	PGV Family	TOOLS	SpotShot
	CENTRAL	A2CWIFI, A2CLAN, A2CELLE, WIFIKIT, LANKIT, CELLKIT		
THREE YEARS	CONTROLLERS	ROAM XL, EZ Decoder System, EZ-DT	MP ROTATOR	All
FIVE YEARS	ROTORS	PGP Ultra, I-20, I-25, I-40, I-50, I-80, and I-90 Families	CONTROLLERS	ACC2, ICC2, ICD Decoders, ICD-HP
	SPRAYS	Pro-Spray, Pro-Spray PRS30, and Pro-Spray PRS40 Families	SENSORS	Clik Sensors, Flow-Sync, MWS, Solar Sync, Wireless Flow Sensor
	VALVES	HQ, ICV, IBV	MICRO	ICZ, PLD, HDL, HDL-COP**, Eco-Mat, Eco-Wrap

Hunter Golf and ST System Irrigation Products*

Hunter will unconditionally repair, replace, or repurchase, at its sole discretion, any defective component* assemblies contained within the Golf and ST products listed below by category, returned freight prepaid, from the date of manufacture within a period of:

ONE YEAR	GOLF CONTROLLERS	Pilot Command Center Software, Pilot-FC, Pilot-FI, Pilot Hub
THREE YEARS	GOLF ROTORS	TTS-800 Series, G-800 Series, G-900 Series, B Series
	GOLF TWO-WAY MODULES	Pilot 100, Pilot 200, Pilot 400, Pilot 600
FIVE YEARS	GOLF ROTORS	The golf rotor component warranty is extended to 5 years with a one-for-one purchase of an HSJ Swing Joint from an authorized Hunter Golf distributor.
	SWING JOINTS	HSJ-0, HSJ-1, HSJ-2, HSJ-3
	ST ROTORS	ST-90, STG-900, ST-1200, ST-1600, ST-1700
	ST ACCESSORIES	All models starting with “ST”
	COMPUTER, PRINTERS & ACCESSORIES, MAINTENANCE RADIO & BATTERY	Equipment manufacturer’s warranty (no Hunter warranty)

* Warranty covers repair, replacement, or repurchase of individual defective component assemblies contained within the product. Returns of complete finished goods are not allowed under warranty without prior approval from the Hunter Product Manager.

If used for agricultural applications, Hunter limits the warranty for its spray, rotator, and rotor products to a period of one (1) year from the original date of manufacture. This agriculture limitation supersedes all other warranties expressed or implied.

**While the use of copper does not completely remove the chance of root intrusion, it has been shown to assist in its prevention when coupled with proper irrigation scheduling.



Statement of Warranty, Continued

If a defect in a Hunter product is discovered during the applicable warranty period, Hunter will repair or replace, at its option, the product or the defective part. This warranty does not extend to repairs, adjustments, or replacement of a Hunter product or part that results from misuse, negligence, alteration, modification, tampering, or improper installation and/or maintenance of the product. This warranty extends only to the original installer of the Hunter product. If a defect arises in a Hunter product during the warranty period, contact your local Hunter Authorized Distributor.

Hunter's warranty applies only to products installed as specified and used as intended for irrigation purposes. Hunter's warranty shall be limited to defects in materials and workmanship during the warranty period, and shall not extend to situations in which the product was subjected to improper design, installation, operation, maintenance, application, abuse, improper electrical current, grounding, service other than by Hunter-authorized agents, operating conditions other than that for which it was designed, or in systems using water containing corrosive chemicals, electrolytes, sand, dirt, silt, rust, or agents that otherwise attack and degrade plastics. Hunter's warranty does not cover component failures caused by lightning strikes, electrical power surges, or unconditioned power supplies. If products are repurchased, the price to Distributor for such products in effect at the time of return will apply.

Hunter's obligation to repair, replace, or repurchase its products or product components as set forth above is the sole and exclusive warranty extended by Hunter. There are no other warranties, expressed or implied, including warranties of merchantability and warranties of fitness for a particular purpose. Hunter will not be liable to a distributor or to any other party in strict liability, tort, contract, or any other manner for any damages caused or claimed to be caused as a result of any design of or defect in Hunter's products, or for any special, incidental, or consequential damages of any nature.

Where applicable, Hunter's statement of warranty complies with local directives.

If you have any questions concerning the warranty or its application, email support@hunterindustries.com.

ASAE CERTIFICATION STATEMENT

Hunter Industries Incorporated certifies that pressure, flow rate, and radius data for these products were determined and listed in accordance with ASAE Standard S398.1, Procedure for Sprinkler Testing and Performance Reporting, and are representative of performance of production sprinklers at the time of publication. Actual product performance may differ from the published specifications due to normal manufacturing variations and sample selection. All other specifications are solely the recommendation of Hunter Industries Incorporated.



Helping our customers succeed is what drives us. While our passion for innovation and engineering is built into everything we do, it is our commitment to exceptional support that we hope will keep you in the Hunter family of customers for years to come.

Gregory R. Hunter, CEO of Hunter Industries

Gene Smith, President, Landscape Irrigation and Outdoor Lighting

Website hunterindustries.com | **Customer Support** +1-800-383-4747 | **Technical Service** +1-800-733-2823

USA HEADQUARTERS

1940 Diamond Street
San Marcos, CA 92078 USA
TEL: +1-760-744-5240

MEXICO

ISO 9001:2015 Certified
Calle Nordika #8615
Colonia la Joya
Parque Industrial Nordika
Tijuana, B.C., Mexico CP 22640
TEL: +011-52-664-903-1382

EUROPE

Avenida Diagonal 523, 5o-2a
Edificio Atalaya
08029 Barcelona, Spain
TEL: +34-9-34-94-88-81

AUSTRALIA

Suite 7, 202 Ferntree Gully Road
Notting Hill, VIC 3168, Australia
TEL: +61-3-9562-9918

MIDDLE EAST

P.O. Box 2370
Amman, 11941, Jordan
TEL: +962-6-5152882
FAX: +962-6-5152992

CHINA

B1618, Huibin Plaza
No. 8, Beichen Dong Street
Beijing 100101, China
TEL/FAX: +86-10-84975146

FSC