



DETAIL LEGEND:

- ① FINISH GRADE
- ② 180-04-SS POP-UP, ADJUSTABLE ARC
 180-04-SS-ON POP-UP, OPPOSING NOZZLE FULL CIRCLE
- ③ I-80 RUBBER COVER KIT - P/N 959300
- ④ SWING JOINT ASSEMBLY: HUNTER HSJ SERIES,
 1" [25 mm] MODELS: HSJ-1-32-212 OR HSJ-1-65-212
 1½" [40 mm] MODELS: HSJ-3-32-212 OR HSJ-3-65-212
 (REFER TO HUNTER CATALOG FOR OPTIONS).
 INSTALL AS FOLLOWS:
 - A. HAND TIGHTEN O-RING JOINTS, BACK-OFF ONE FULL TURN TO ALLOW FOR SWING ACTION.
 - B. INSTALL SWING JOINT LAY ARM AT 30°- 45° ANGLE TO THE LATERAL.
- ⑤ LATERAL TEE OR ELL CONNECTION PER LATERAL LINE FITTING SPECIFICATIONS.
- ⑥ LATERAL PIPE PER LATERAL LINE SPECIFICATIONS. SOIL DEPTH AS SPECIFIED.

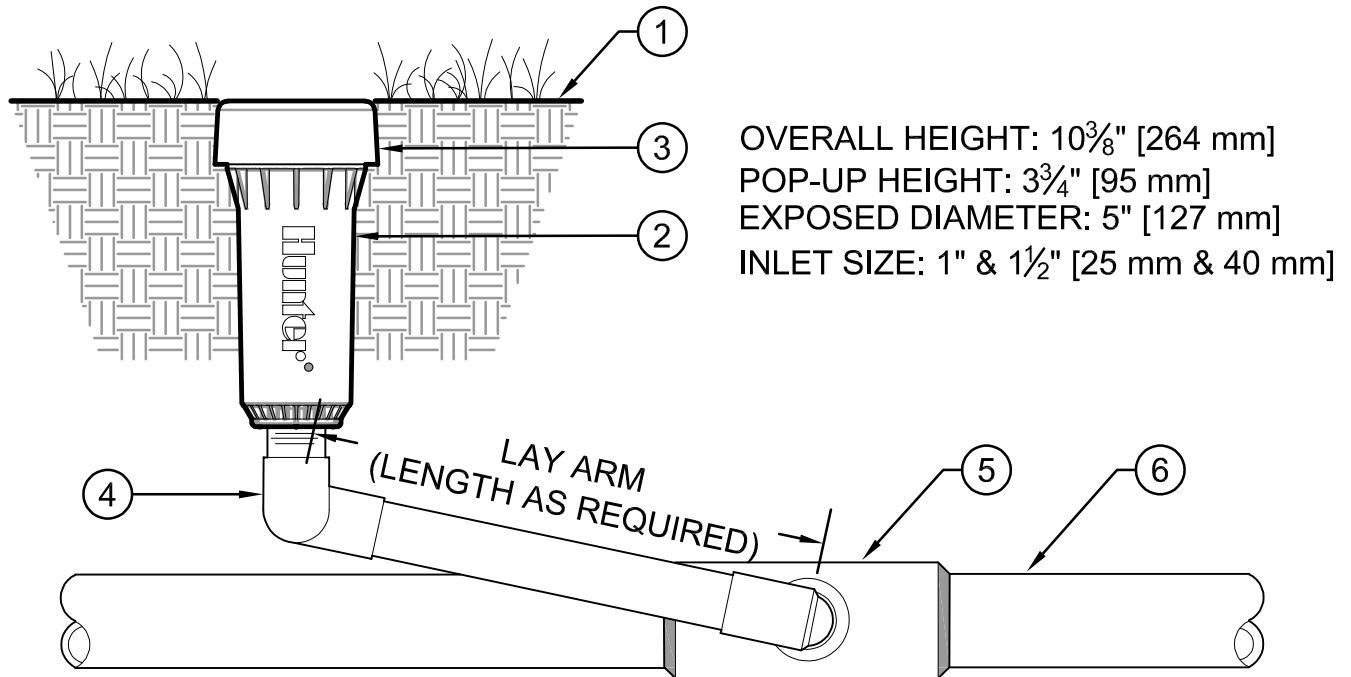

I-80 POP-UP ROTOR WITH RUBBER COVER