


ST-1600-KIT | Reference Guide

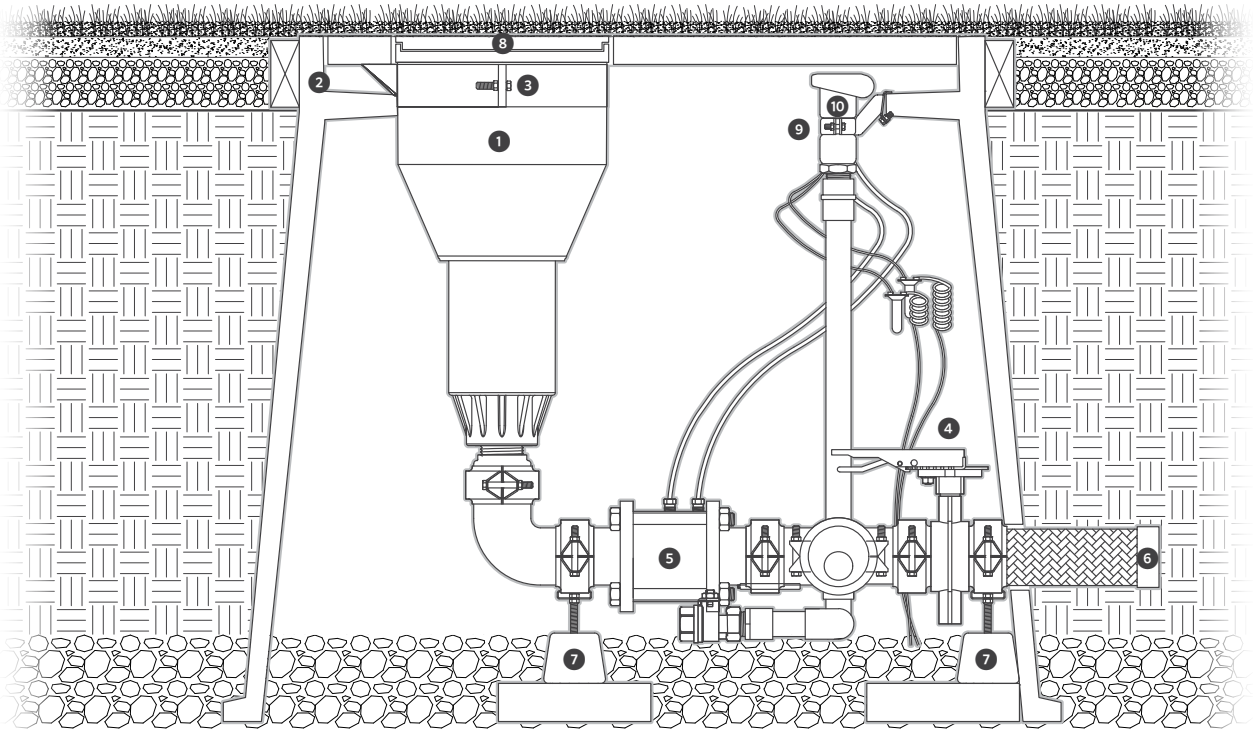

ST-1600-KIT Components

FIGURE	COMPONENTS TO ORDER	QTY	ITEM DESCRIPTION
1	ST-1600-HS-B	1	High-speed pop-up, adjustable arc (40°–360°), 2" BSP inlet
2	ST-243636-B	1	Composite vault, precast hole for rotor and two quick-access ports for quick coupler and remote on-off-auto selector
3	ST-BKT-1600	1	Rotor vault hanger and grade adjustment bracket for ST-1600-HS-B Rotor
4	ST-BVF30-K	1	Manifold butterfly valve and Victaulic® coupling fitting kit
5	ST-V30-KV	1	3" metal control valve, 3" grooved Victaulic inlet/outlet fittings, solenoid, and on-off-auto selector manifold
6	ST-H30-K	1	Ultra-flexible 3" x 26" stainless steel corrugated manifold inlet hose with stainless steel braided outer support layer with 3" female NPT inlet
7	ST-SPT-K	2	Adjustable manifold support stand; two required per vault
8	ST-IBS-1600	1	Infill barrier system Rubber Cover Kit for ST-1600-HS-B Rotor
9	ST-BKT-QCV	1	Hanger bracket for HQ-5-RC Quick coupler
10	HQ-5R-C	1	Quick coupler, 1" NPT inlet, 1¼" outlet for key

HUNTER INDUSTRIES | Built on Innovation®
hunterindustries.com

Victaulic is a trademark of Victaulic Company.

© 2022 Hunter Industries™. Hunter, the Hunter logo, and all other trademarks are property of Hunter Industries, registered in the U.S. and other countries.