



VALVE IDENTIFICATION GUIDE

SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY
⊕	Hunter ICV-G 40mm 25 mm, 40 mm , 50 mm, and 80 mm Plastic Electric Remote Control Valves, Globe Configuration, with NPT Threaded Inlet/Outlet, for Commercial/Municipal Use.	4
⊕	Hunter ICV-G 50mm 25 mm, 40 mm , 50 mm, and 80 mm Plastic Electric Remote Control Valves, Globe Configuration, with NPT Threaded Inlet/Outlet, for Commercial/Municipal Use.	2
A2C-75D-SS	Hunter A2C-75D-SS 75-Station Decoder controller in a stainless steel wall mount enclosure.	1
M	Water Meter 50mm	1
—	Irrigation Lateral Line: PVC Class 200 SDR 21 32	565.3 m
—	Irrigation Lateral Line: PVC Class 200 SDR 21 40	145.6 m
—	Irrigation Lateral Line: PVC Class 200 SDR 21 50	160.5 m
—	Irrigation Lateral Line: PVC Class 200 SDR 21 65	34.2 m
---	Irrigation Mainline: PVC Schedule 40 80	73.3 m
---	Irrigation Mainline: PVC Schedule 40 100	188.3 m



IRRIGATION LEGEND

SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY	kPa	l/min
⊕	Hunter I-50-06-SS Turf Rotor, 15 cm Pop-Up. Adjustable to Full Circle. Drain Check Valve, Stainless Steel Riser, 25 mm Female NPT Inlet Threads, Standard Nozzle.	12	551.6	69.3
⊕	Hunter I-50-06-SS-ON Turf Rotor, 15 cm Pop-Up. Adjustable to Full Circle. Drain Check Valve, Stainless Steel Riser, 25 mm Female NPT Inlet Threads, Dual Opposing Nozzle.	4	551.6	58.7

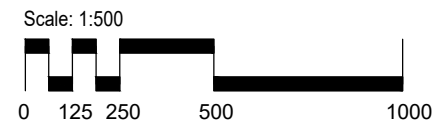

TECHNICAL ASSISTANCE
1-800-319-4796
WWW.HUNTERINDUSTRIES.COM



LAWN BOWLING (METRIC)
I-50 ROTOR
NON-LOOPED MAIN LINE LAYOUT

HUNTER INDUSTRIES
1940 DIAMOND STREET
SAN MARCOS, CALIFORNIA 92078

SHEET
1 of 2